


# ***HIWIN* Linear Guideway**

## **Technical Information**

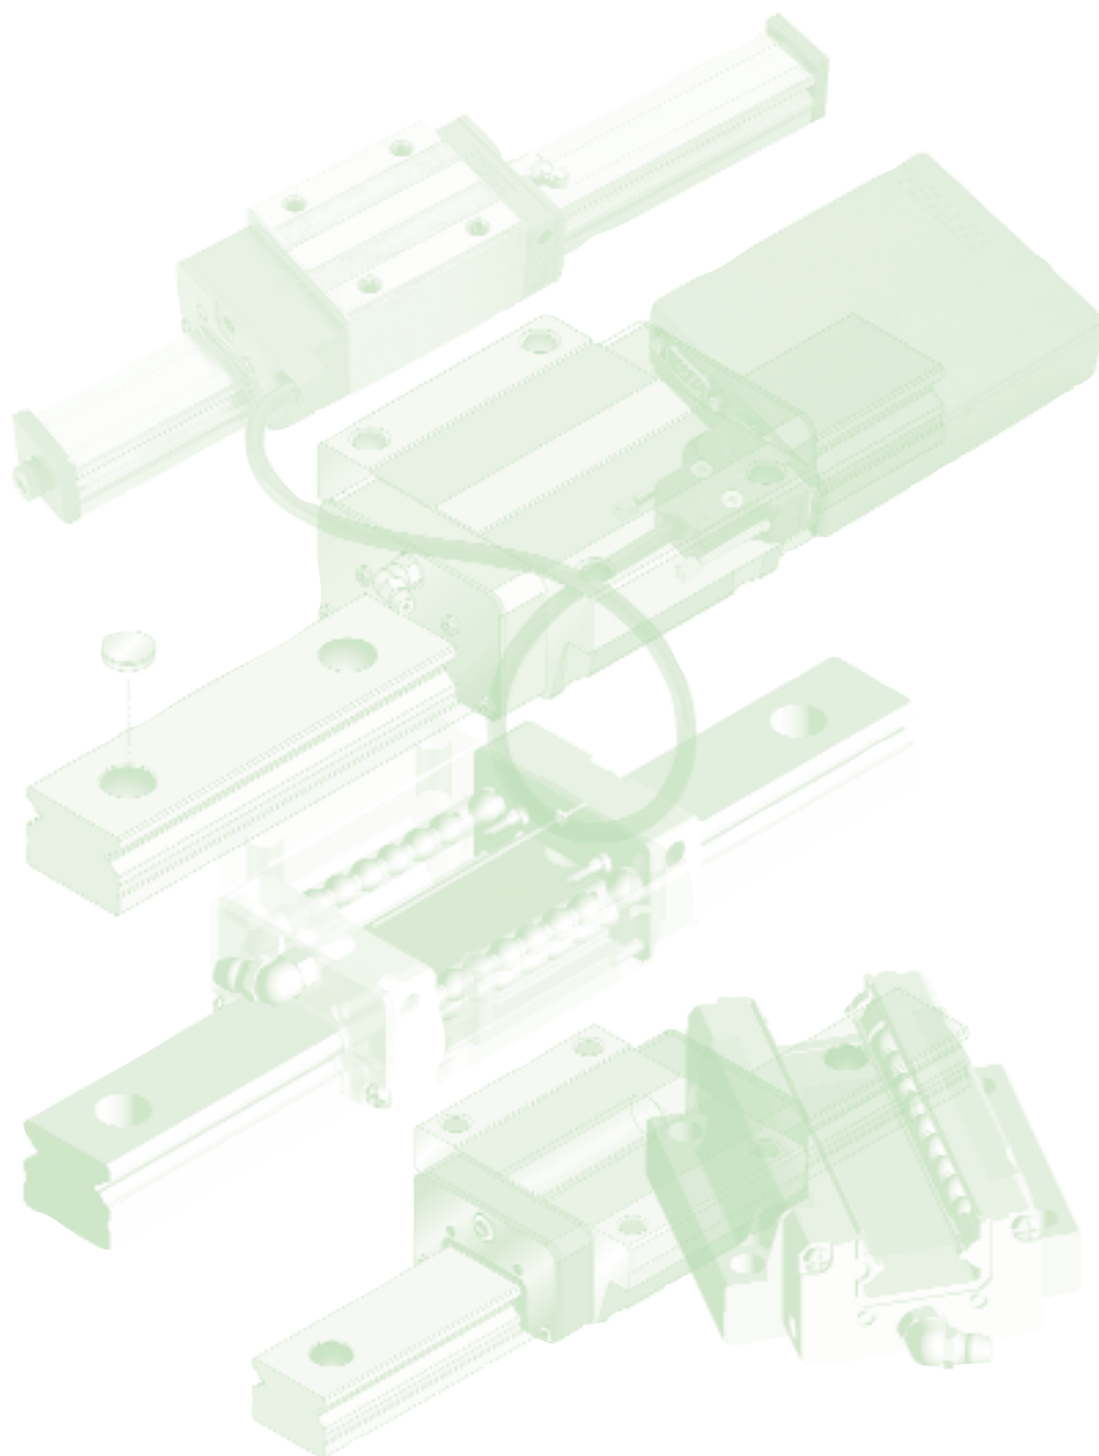

# **HIWIN**

# **Linear Guideway**

## **Technical Information Index**

### **Preface**

### **1. General Information**

|                                                 |    |
|-------------------------------------------------|----|
| 1-1 Advantages and Teatures of Linear Guideway  | 1  |
| 1-2 The principles of selecting linear guideway | 4  |
| 1-3 Basic Load Rating of Linear Guideways       | 5  |
| 1-4 The Service Life of Linear Guideways        | 5  |
| 1-5 Acting Load                                 | 8  |
| 1-6 Friction                                    | 10 |
| 1-7 Lubrication                                 | 11 |
| 1-8 The Butt-joint Rail                         | 11 |
| 1-9 Layout Method                               | 12 |
| 1-10 Installation of Linear Guideway            | 13 |

### **2. HIWIN Linear Guideway Product Series** 17

#### **2-1 LG Series**

|                                                    |    |
|----------------------------------------------------|----|
| 2-1-1. Features of the LG Series Linear Guideway   | 18 |
| 2-1-2. Construction of LG Series                   | 18 |
| 2-1-3. Model Number of LG Series                   | 18 |
| 2-1-4. Types                                       | 20 |
| 2-1-5. Accuracy Classes                            | 21 |
| 2-1-6. Preload                                     | 24 |
| 2-1-7. Stiffness                                   | 25 |
| 2-1-8. Lubrication                                 | 25 |
| 2-1-9. Dust Protection Equipment                   | 27 |
| 2-1-10. Friction                                   | 28 |
| 2-1-11. The Accuracy Tolerance of Mounting Surface | 29 |
| 2-1-12. Cautions for Installation                  | 30 |
| 2-1-13. Standard Length and Max. Length of Rail    | 31 |
| 2-1-14. Dimensions for HIWIN LG Series             | 33 |

#### **2-2 AG Series**

|                                                  |    |
|--------------------------------------------------|----|
| 2-2-1. Features of the AG Series Linear Guideway | 38 |
| 2-2-2. Construction of AG Series                 | 38 |
| 2-2-3. Model Number of AG Series                 | 38 |
| 2-2-4. Types                                     | 40 |
| 2-2-5. Accuracy Classes                          | 41 |
| 2-2-6. Preload                                   | 43 |

|                                                                      |    |
|----------------------------------------------------------------------|----|
| 2-2-7. Stiffness .....                                               | 43 |
| 2-2-8. Lubrication .....                                             | 43 |
| 2-2-9. Dust Protection Equipment .....                               | 45 |
| 2-2-10. Friction .....                                               | 46 |
| 2-2-11. The Accuracy Tolerance of Mounting Surface .....             | 46 |
| 2-2-12. Cautions for Installation .....                              | 48 |
| 2-2-13. Standard Length and Max. Length of Rail .....                | 49 |
| 2-2-14. Dimensions for HIWIN AG Series .....                         | 50 |
| <b>2-3 Miniature MGN/MGW Series</b>                                  |    |
| 2-3-1. Features of MGN Series .....                                  | 54 |
| 2-3-2. Construction of MGN Series .....                              | 54 |
| 2-3-3. Feature of MGW Series .....                                   | 54 |
| 2-3-4. Construction of MGW Series .....                              | 55 |
| 2-3-5 Application .....                                              | 55 |
| 2-3-6 Model Number of MGN/MGW Series .....                           | 55 |
| 2-3-7 Accuracy Standards .....                                       | 57 |
| 2-3-8 Preload .....                                                  | 58 |
| 2-3-9 Dust Protection Equipment .....                                | 58 |
| 2-3-10 Shoulder Heights and Fillets .....                            | 59 |
| 2-3-11 Standard Length and Maximum Length of Linear Guideways .....  | 59 |
| 2-3-12 Dimensions for HIWIN MGN/MGW Series .....                     | 61 |
| <b>2-4 IG Series</b>                                                 |    |
| 2-4-1 Model Number of IG .....                                       | 63 |
| 2-4-2 Technical Data of HIWIN Intelligent Linear Guideway (IG) ..... | 64 |
| 2-4-3 Accuracy Classes .....                                         | 64 |
| 2-4-4 Preload .....                                                  | 65 |
| 2-4-5 Dimensions for HIWIN IG Series .....                           | 66 |
| <b>2-5 EI Series</b> .....                                           | 70 |
| <b>2-6 QI Series</b> .....                                           | 72 |
| <b>2-7 Option Function</b>                                           |    |
| Metallic End Cap Type .....                                          | 73 |

(The specifications in this catalogue are subject to change without notification.)

## Preface

A linear guideway allows a type of linear motion that utilizes rolling balls. By using circulating balls between the rail and the block, a linear guideway can achieve high precision linear motion. Compared to a traditional slide, the coefficient of friction for a linear guideway is only 1/50th. Because of the restraint effect between the rails and the blocks, linear guideways can take up loads in both the up/down and the left/right directions. With these features, linear guideways can greatly enhance moving accuracy, it is especially true when accompanied with precision ball screws

## 1 General Information

### 1-1 Advantages and Teatures of Linear Guideways

#### 1-1-1 Advantages of Linear Guideways

##### (1) High positional accuracy

When a loaded plate is driven by a linear motion guideway, the frictional contact between the loaded plate and the bed is rolling contact. The coefficient of friction is only 1/50th of traditional contact, and the difference between the dynamic and the static coefficient of friction is small. Therefore, there would be no slippage while the table is moving.

##### (2) Long life with highly accurate motion

With a traditional slide, errors in accuracy are caused by the counter flow of the oil film. Insufficient lubrication causes wear between the contact surfaces, which become increasingly inaccurate. In contrast, rolling contact has little wear; therefore, machine can achieve a long life with highly accurate motion.

##### (3) High speed motion is possible with a low driving force

Because the linear guideway has little friction resistance, only a small driving force is needed for moving the loaded table. The result of this fact is the power savings. This is especially true for the reciprocating parts.

##### (4) Equal loading capacity in all directions

Because of its special constraint design, a linear guideway can take up loads in either the up/down or left/right directions. Conventional linear slides can only take up small loads in the direction parallel to the contact surface. They are also more likely to become inaccurate when they are subjected to these loads.

##### (5) Easy installation and interchangeability

Installing a linear guideway is fairly easy. Grinding or milling the machine surface, following a recommended installation procedure, and tightening the bolts to their specified torque can achieve high accuracy linear motion. However, a traditional slide takes more time to scrape the tracks. If any errors in accuracy arise, the surface must be scraped again. In contrast, linear guideways are interchangeable.

##### (6) Easy lubrication

With a traditional sliding system, insufficient lubrication wears out the contact surfaces. Also, it can be quite difficult to supply sufficient lubrication to the contact surfaces because finding an appropriate lubrication point is not very easy. With a linear motion guideway, grease can be easily supplied through the grease nipple on the linear guideway block. It is also possible to utilize a centralized oil lubrication system by piping the lubrication oil to piping joint.

### 1-1-2 Features of the HIWIN Linear Guideway

#### (1) Gothic arch contact

The HIWIN linear guideway has the Gothic arch contact design. Because of the special constraint design, the linear guideway can take up loads in up/down and left/right directions. Furthermore, the symmetrical four-point constraint design gives no positional deflection while the linear guideway is running. Accordingly, the rigidity and accuracy of the HIWIN linear guideway is higher than that of circular contact.

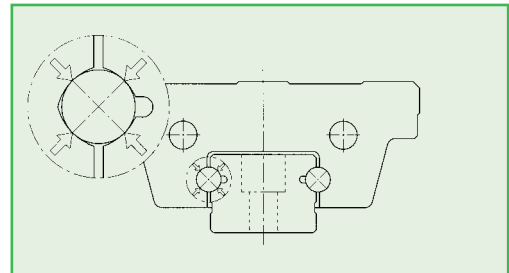


Table 1.1 Load Directions

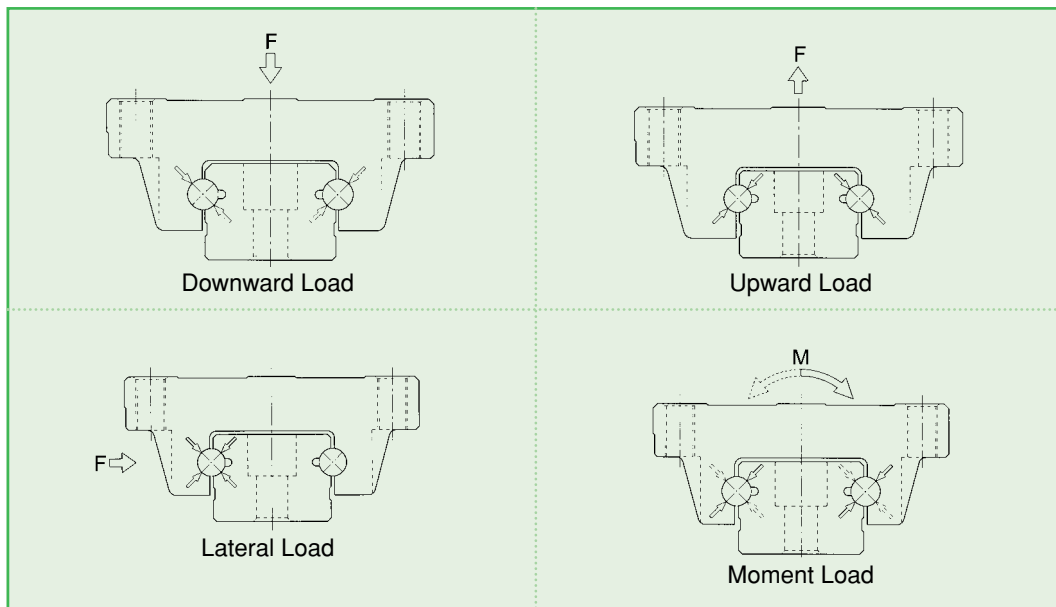


Table 1.2 Comparison of Both Gothic Arch Contact Design and Circular Contact Design

| Gothic Arch Contact                                                                                                                                                                                                    | Circular Contact                                                                                                                                                                                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                        |                                                                                                                                                                                                                  |
| <p>✓ When a linear guideway is subjected a lateral load, balls will have no positional deflection because the balls are completely restrained within raceway groove. This design achieves a high running accuracy.</p> | <p>✗ Because there is no constraint in the perpendicular direction, a large positional deflection will occur when a lateral load is applied to this linear motion guideway. It will also have poor accuracy.</p> |
| <p>✓ For this simple two-row Gothic arch contact design, it is possible to handle loads in both the up/down and the lateral directions.</p>                                                                            | <p>✗ Compared to a Gothic arch design, a circular design needs four circular arcs to handle the same loading condition.</p>                                                                                      |

**(2) Interchangeability**


Because of restricted dimension control, the dimensional difference of linear guideways can be kept in a reasonable range, and which means that the specific series of linear guideways possess the interchangeability. For this characteristic, it is good to have the stock of rails and blocks separately for saving the space of warehouse.

**(3) The optimum design**


As for the design of circulating system, HIWIN has obtained patents from many developed countries. Enlarged ball diameter and circulating curve ratio of design makes circulation smoother as well as makes service life longer.

**(4) High accuracy**

As shown in the figure, both sides of raceway groove are ground simultaneously, and this ensures nearly perfect parallelism for all four surfaces. Therefore, high accuracy repetition is possible when it is installed by tightening the mounting bolts with torque wrench to a specified torque.

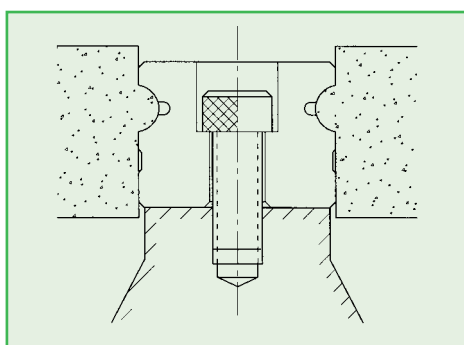

## 1-2 The Principles of Selecting Linear Guideway

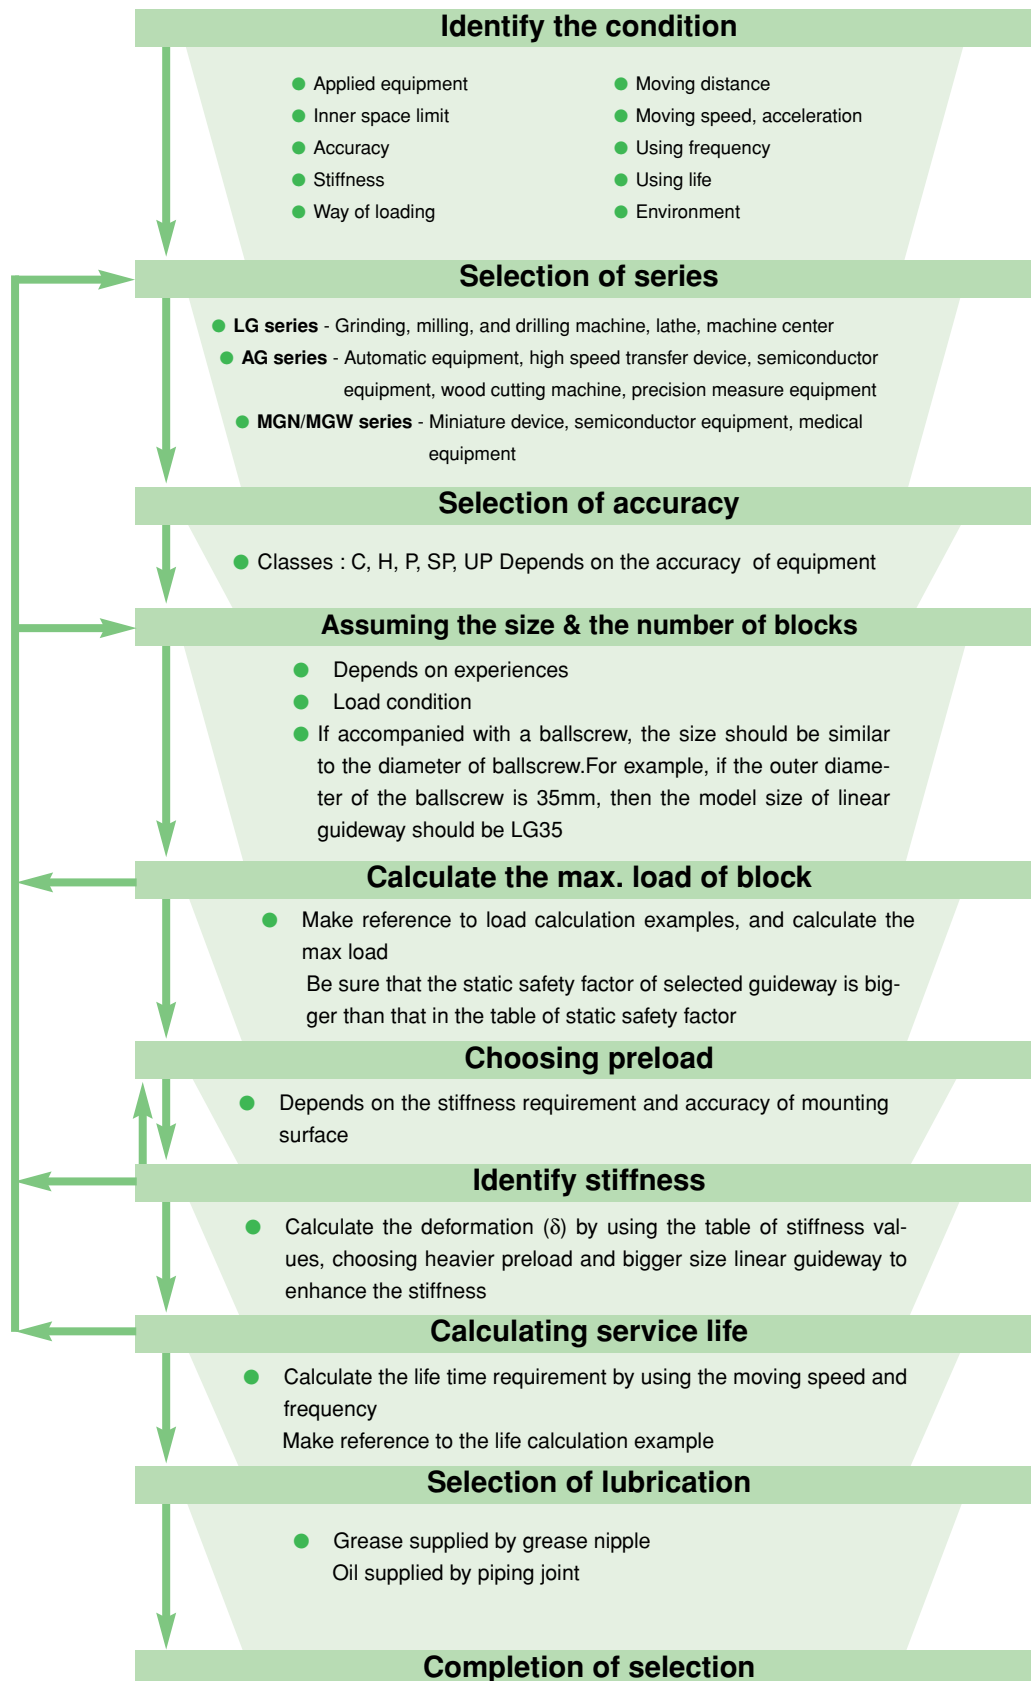

## 1-3 Basic Load Rating of Linear Guideways

### 1-3-1 Basic Static Load Rating ( $C_0$ )

#### (1) Definition

A local permanent deformation will be caused between the raceway surface and the rolling balls when a linear guideway is subjected to an excessively large load or an impact load while either at rest or in motion. If the amount of this permanent deformation exceeds a certain limit, it becomes an obstacle to the smooth operation of the linear guideway. Generally, the definition of the basic static load rating is a static load of constant magnitude and direction, which results in a total permanent deformation of 0.0001 times the diameter of the rolling ball for the rolling ball and the raceway at the contact point subjected to the largest stress. The value is described in the dimension tables for each linear guideway. A designer can select a suitable linear guideway by referring to these tables. The maximum static load applied to a linear guideway must not exceed the basic static load rating.

#### (2) Static safety factor

When the Guideway system is static or under low speed motion. Static safety factor which depend on environmental and operating conditions, must be taken into consideration. A larger safety factor is especially important for guideways subject to impact loads (See Table 6). The static load can be obtained by using Eq. 1.1.

■ Table 1.3 Static Safety Factor

| Load Condition          | $f_s$   |
|-------------------------|---------|
| Normal Load             | 1.0~3.0 |
| With impacts/vibrations | 3.0~5.0 |

$$f_s = \frac{C_0}{P} \quad \text{Equal. 1.1}$$

$C_0$  : Static load rating

$P$  : Working load

$f_s$  : Static safety factor

### 1-3-2 Basic Dynamic Load Rating ( $C$ )

#### Definition

The basic dynamic load rating is the load that does not change in direction or magnitude and results in a nominal life of 50km of operation for a linear guideway. The values for the basic dynamic load rating of each guideway are shown in dimension tables. They can be used to predict the service life for a selected linear guideway.

## 1-4 The Service Life of Linear Guideways

### 1-4-1 Service Life

When the raceway and the rolling balls of a linear guideway are continuously subjected to repeated stresses, the raceway surface shows fatigue. Flaking will eventually occur. This is called fatigue flaking. The life of a linear guideway is defined as the total distance traveled until the fatigue flaking appears at the surface of raceway or rolling balls.

### 1-4-2 Nominal Life ( $L$ )

The service life varies widely even when the linear motion guideways are manufactured in the same way or operated under the same motion conditions. For this reason, nominal life is used as the criteria for predicting the service life of a linear motion guideway. The nominal life is the total distance that 90% of a group of identical linear motion guideways, operated under identical conditions, can travel without flaking. When the basic dynamic rated load is applied to a linear motion guideway, the nominal life is 50km.



### 1-4-3 Calculation of Nominal Life

The acting load will affect the nominal life of a linear guideway. Based on the selected basic dynamic rated load and the actual load, the nominal life can be calculated by using Equal. 1.2.

$$L = \left( \frac{C}{P} \right)^3 \times 50km = \left( \frac{C}{P} \right)^3 \times 31mile \quad \text{Equal. 1.2}$$

$L$  : Nominal life  
 $C$  : Basic dynamic load rating  
 $P$  : Actual load

If the environmental factors are taken into consideration, the nominal life is influenced widely by the motion conditions, the hardness of the raceway, and the temperature of the linear guideway. The relationship between these factors is expressed in Eq. 1.3.

$$L = \left( \frac{f_h \times f_t \times C}{f_w \times P_c} \right)^3 \times 50km = \left( \frac{f_h \times f_t \times C}{f_w \times P_c} \right)^3 \times 31mile \quad \text{Equal. 1.3}$$


$L$  : Nominal life  
 $C$  : Basic dynamic load rating  
 $P_c$  : Calculated load  
 $f_h$  : Hardness factor  
 $f_t$  : Temperature factor  
 $f_w$  : Load factor

### 1-4-4 Factors of Normal Life

#### (1) Hardness factor ( $f_h$ )

In general, the raceway surface in contact with the balls must have the hardness of HRC 58~64 to an appropriate depth. When the specified hardness is not obtained, the permissible load is reduced and the nominal life is decreased. In this situation, the basic dynamic load rating and the basic static load rating must be multiplied by the hardness factor for calculation.


##### ■ Raceway hardness

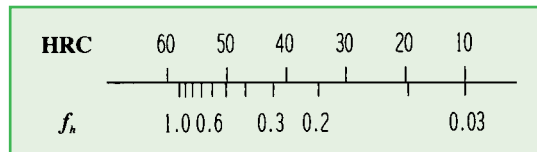

#### (2) Temperature factor ( $f_t$ )

When the temperature of a linear guideway exceeds 100 °C, the permissible load is reduced and the nominal life is decreased. Therefore, the basic dynamic load rating and the basic static load rating must be multiplied by the temperature factor.

##### ■ Temperature

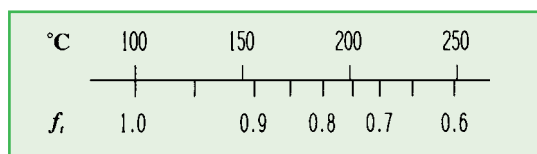

#### (3) Load factor ( $f_w$ )

The loads acting on a linear guideway include the weight of slide, the inertia load at the times of start and stop, and the moment loads caused by overhanging. These load factors are especially difficult to estimate because of mechanical vibrations and impacts. Therefore, the load on linear guideway should be

■ Table 1.4 Load factor

| Loading Condition        | Service Speed                       | $f_w$     |
|--------------------------|-------------------------------------|-----------|
| No impacts & vibration   | Low speed $V \leq 15$ m/min         | 1 ~ 1.5   |
| Normal load              | Medium speed $15 < V \leq 60$ m/min | 1.5 ~ 2.0 |
| With impacts & vibration | High speed $V > 60$ m/min           | 2.0 ~ 3.5 |

#### (4) Calculation of the service life time ( $L_h$ )


Transform the nominal life into the life time by using the speed and frequency.

$$L_h = \frac{L \times 10^3}{S \times 60} = \frac{\left(\frac{C}{P}\right)^3 \times 50 \times 10^3}{S \times 60} \text{ hr} \quad \text{----- Equal. 1.4}$$

$L_h$  : Service life time(hr)       $S$  : Speed (m/min)  
 $L$  : Nominal life (km)       $C/P$  : Load ratio

If the load ratio and speed have been calculated, the service life time can be obtained easily from the service life nomogram.

■ Table 1.5 Service life time nomogram

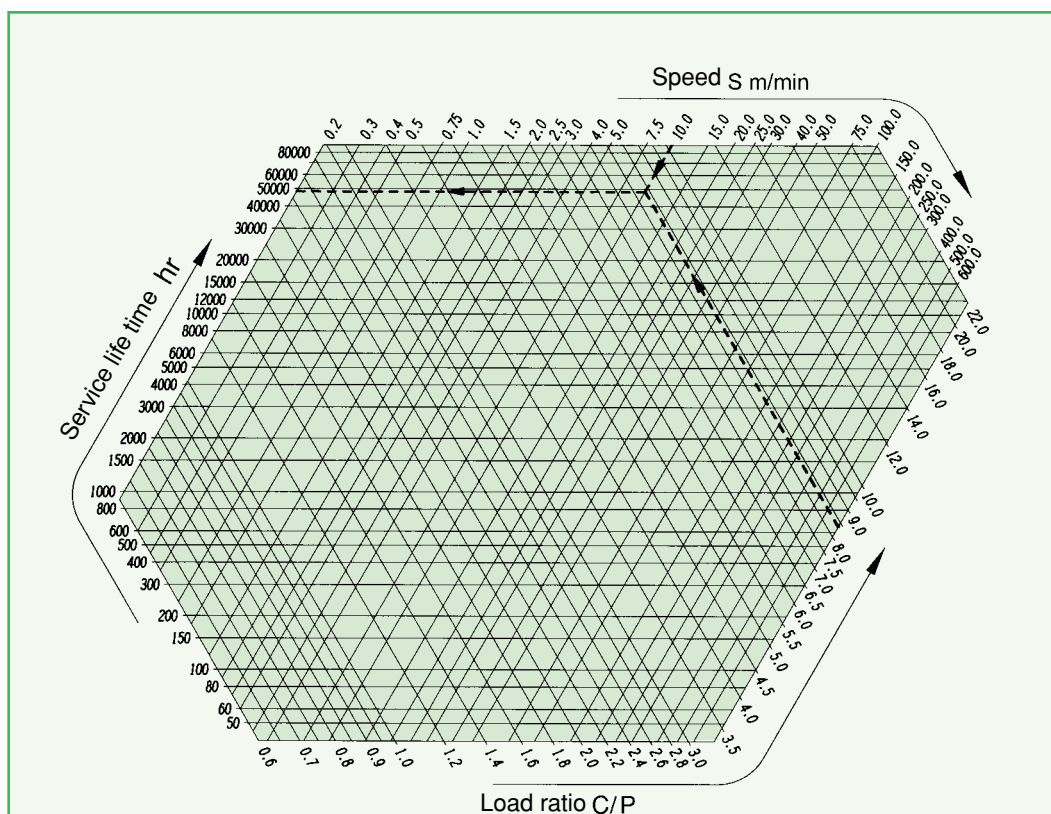

A surface grinding machine has a working load 2,000kgf(500kgf per block) and 10m/min feed rate. What is the service life time when the machine uses a set of HIWIN LGW35CA linear guideways?

➔ By checking the dimension table, the basic dynamic load rating of LGW35CA is 4,180kgf, so the load ratio is:

$$\frac{C}{P} = \frac{4,180}{500} = 8.36$$

➔ Calculate the nominal life  $L = \left(\frac{C}{P}\right)^3 \times 50 = (8.36)^3 \times 50 = 29,214\text{km}$

➔ According to the intersection of the line of load ratio and the line of speed, the service life time is 49,000hr

➔  $L_h$  can also be obtained by substituting the numerical values into Eq. 1.4

$$L_h = \frac{\left(\frac{C}{P}\right)^3 \times 50 \times 10^3}{S \times 60} = \frac{(8.36)^3 \times 50 \times 10^3}{10 \times 60} = 48,690\text{hr}$$

➔ Assume the frequency is 50% and its service life is 11 years.











## 1-5 Acting Load

### 1-5-1 Calculation of Load

Several factors affect the calculation of the loads acting on a linear guideway (such as the position of the center gravity of object, the thrust position, and the inertial forces at the times of start and stop). To obtain the correct load value, each loading condition should be carefully taken into consideration.


#### (1) Load on one block

Table 1-6 Calculation Examples
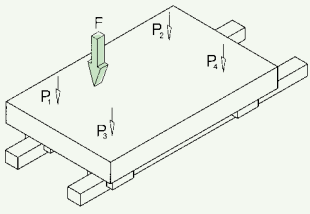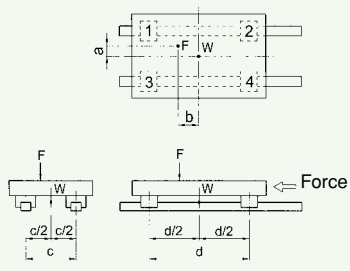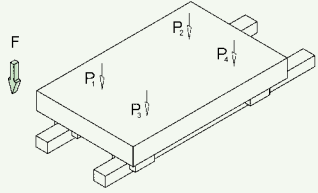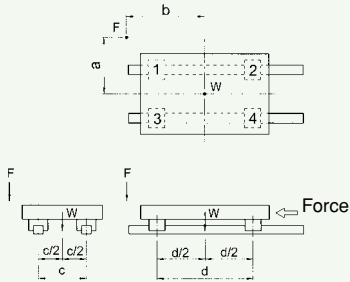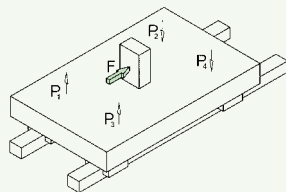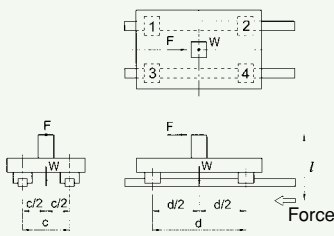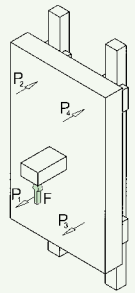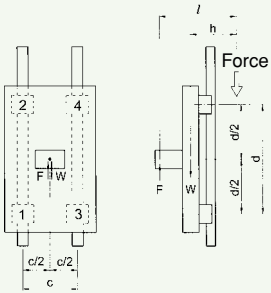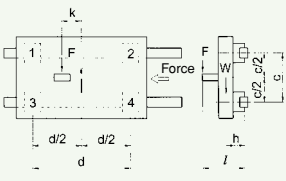
| Patterns                                                                            | Loads layout                                                                        | Load on one block                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    |   | $P_1 = \frac{W}{4} + \frac{F}{4} + \frac{F \times a}{2c} + \frac{F \times b}{2d}$ $P_2 = \frac{W}{4} + \frac{F}{4} + \frac{F \times a}{2c} - \frac{F \times b}{2d}$ $P_3 = \frac{W}{4} + \frac{F}{4} - \frac{F \times a}{2c} + \frac{F \times b}{2d}$ $P_4 = \frac{W}{4} + \frac{F}{4} - \frac{F \times a}{2c} - \frac{F \times b}{2d}$ |
|   |  | $P_1 = \frac{W}{4} + \frac{F}{4} + \frac{F \times a}{2c} + \frac{F \times b}{2d}$ $P_2 = \frac{W}{4} + \frac{F}{4} + \frac{F \times a}{2c} - \frac{F \times b}{2d}$ $P_3 = \frac{W}{4} + \frac{F}{4} - \frac{F \times a}{2c} + \frac{F \times b}{2d}$ $P_4 = \frac{W}{4} + \frac{F}{4} - \frac{F \times a}{2c} - \frac{F \times b}{2d}$ |
|  |  | $P_1 = P_3 = -\frac{W}{4} + \frac{F \times l}{2d}$ $P_2 = P_4 = \frac{W}{4} + \frac{F \times l}{2d}$                                                                                                                                                                                                                                    |
|  |  | $P_1 \sim P_4 = -\frac{W \times h}{2d} + \frac{F \times l}{2d}$                                                                                                                                                                                                                                                                         |
|  |  | $P_1 \sim P_4 = \frac{W \times h}{2c} + \frac{F \times l}{2c}$ $P_{11} = P_{13} = \frac{W}{4} + \frac{F}{4} + \frac{F \times k}{2d}$ $P_{12} = P_{14} = \frac{W}{4} + \frac{F}{4} - \frac{F \times k}{2d}$                                                                                                                              |

## (2) Loads with inertia forces




■ Table 1.7 Calculation examples for loads with inertia forces
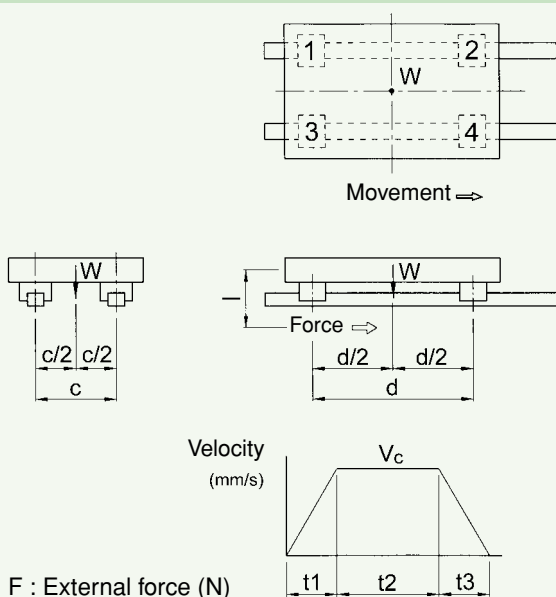
| Considering the acceleration and deceleration                                                                                                                                                                                                     | Load on one block                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p> <math>F</math> : External force (N)<br/> <math>W</math> : Weight of object (N)<br/> <math>g</math> : Gravitational acceleration (9.8m/sec<sup>2</sup>) </p> | <p>→ Constant velocity</p> $P_1 \sim P_4 = \frac{W}{4}$ <p>→ Acceleration</p> $P_1 = P_3 = \frac{W}{4} + \frac{1}{2} \times \frac{W}{g} \times \frac{V_c}{t1} \times \frac{l}{d}$ $P_2 = P_4 = \frac{W}{4} - \frac{1}{2} \times \frac{W}{g} \times \frac{V_c}{t1} \times \frac{l}{d}$ <p>→ Deceleration</p> $P_1 = P_3 = \frac{W}{4} - \frac{1}{2} \times \frac{W}{g} \times \frac{V_c}{t3} \times \frac{l}{d}$ $P_2 = P_4 = \frac{W}{4} + \frac{1}{2} \times \frac{W}{g} \times \frac{V_c}{t3} \times \frac{l}{d}$ |

## 1-5-2 Calculation of the Mean Load for Fluctuating Loads

When the load on a linear guideway fluctuates greatly, the variable load condition must be considered in the life calculation. The definition of the mean load is the load equal to the bearing fatigue load under the variable loading conditions. It can be calculated by using table 1.1.

■ Table 1.8. Calculation examples for mean load ( $P_m$ )

| Operation Condition                                                                                              | Mean load                                                                                                                                                                                                                                                                                       |
|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Variation in steps</p>     | $P_m = \sqrt[3]{\frac{1}{L} (P_1^3 \times L_1 + P_2^3 \times L_2 + \dots + P_n^3 \times L_n)}$ <p> <math>P_m</math> : Mean load<br/> <math>P_n</math> : Fluctuating load<br/> <math>L</math> : Total running distance<br/> <math>L_n</math> : Running distance under load <math>P_n</math> </p> |
| <p>Simple fluctuating</p>     | $P_m = \frac{1}{3} (P_{min} + 2 \times P_{max})$ <p> <math>P_m</math> : Mean load<br/> <math>P_{min}</math> : Min. load<br/> <math>P_{max}</math> : Max. load </p>                                                                                                                              |
| <p>Sin curve fluctuating</p>  | $P_m = 0.65 \times P_{max}$ <p> <math>P_m</math> : Mean fluctuating load<br/> <math>P_{max}</math> : Max. fluctuating load </p>                                                                                                                                                                 |

### 1-5-3 Calculation for Bidirectional Equivalent Loads

When bidirectional loads applied to the linear guideway, the equivalent load can be obtained by using the following formulas

When  $F_s > F_l$   $P_e = F_s + 0.5 \times F_l$  ..... Equal. 1.5

When  $F_l > F_s$   $P_e = F_l + 0.5 \times F_s$  ..... Equal. 1.6

$P_e$  : Equivalent load




$F_s$  : Perpendicular

$F_l$  : Lateral load

### 1-5-4 Calculation Example for Service Life

Besides the experiences, a suitable linear guideway should be selected based on the acting load. The service life is calculated from the ratio of the working load and the basic dynamic load rating.

Table 1.9 Calculation example for service life
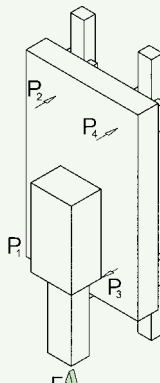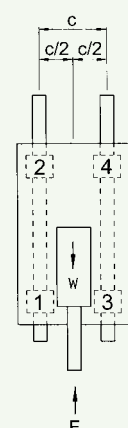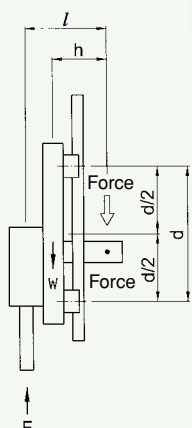
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                              |                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Type of Linear Guideway                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Dimension of device                          | Operating condition                                                                                                     |
| Type : LGH 30 CA<br>C : 3,380 kgf<br>Co : 5,460 kgf<br>force : Z2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | d:600 mm<br>c:400 mm<br>h:200 mm<br>l:250 mm | Weight of object(W) :400 kgf<br>Acting force(F) :100 kgf<br>Temperature :normal temperature<br>Load status :normal load |
| <p>                     Calculation of acting loads <math>P_1 \sim P_4 = \frac{W \times h}{2d} - \frac{F \times l}{2d} = \frac{400 \times 200}{2 \times 600} - \frac{100 \times 250}{2 \times 600} = 45.9 \text{ kgf}</math><br/> <math>P_{max} = 45.9 \text{ kgf}</math> </p> <p>                     PC is equal to the sum of <math>P_{max}</math> and preload<br/> <math>P_c = P_{max} + P_z = 45.9 + (3,380 \times 0.05) = 214.9 \text{ kgf}</math> </p> <p>                     Calculation for life L<br/> <math display="block">L = \left( \frac{f_h \times f_t \times C}{f_w \times P_c} \right)^3 \times 50 = \left( \frac{1 \times 1 \times 3,380}{2 \times 214.9} \right)^3 \times 50 = 24,317 \text{ km}</math> </p> |                                              |                                                                                                                         |

## 1-6 Friction

As mentioned in the preface, a linear guideway allows a type of rolling motion, which is achieved by using balls. The coefficient of friction for a linear guideway can be as little as 1/50th of a traditional slide. Generally, the coefficient of friction of linear guideway is about 0.004, more or less differentiate from different series.

When a load is 10% or less than the basic static load rate, the most of the resistance comes from the grease resistance and frictional resistance between balls. In contrast, if the load is more than the basic static load rate, the resistance will be mainly come from the load.

$$F = \mu \times W + f \quad \text{Equal. 1.7}$$

$F$  : friction (kgf)       $\mu$  : Coefficient of friction  
 $f$  : friction resistance (kgf)       $W$  : Loads (kgf)

## 1-7 Lubrication

### 1-7-1 Grease

Each linear guideway is lubricated with lithium soap base grease No. 2 before shipment. After the linear guideway been installed, we recommended that the replenishment should be held every 100km. It is possible to carry out the lubrication by piping the grease nipple. Generally, the grease is suitable for the running speed not over 60 m/min or the cooling function is not important.

$$T = \frac{100 \times 1000}{S \times 60} \text{ hr} \quad \text{Equal. 1.8}$$


$T$  : Feeding frequency of oil(hour)  
 $S$  : speed(m/min)

### 1-7-2 Oil

The recommended viscosity of oil is about 30~150cst. The standard grease nipple may optionally be replaced by oil piping joint for oil type lubrication.

Since the oil is easier to evaporate than the grease, the recommended oil feeding rate is about 0.3cm<sup>3</sup>/hr.

## 1-8 The Butt-joint Rail

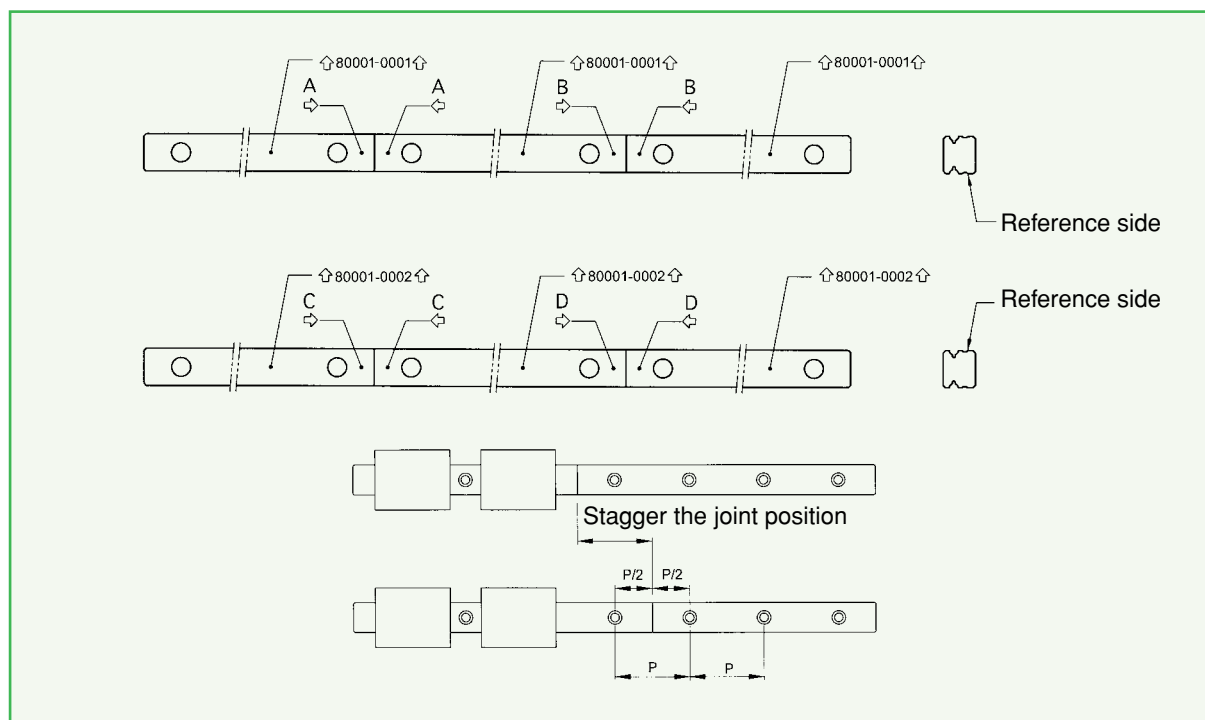


The butt-joint rail should be installed by following the arrow sign and ordinal number which is marked on the surface of each rail. For paired butt-joint rails, the jointed position should be interlaced for avoiding the accuracy problem due to the difference between different rails. (see figure)

## 1-9 Layout Method

The linear guideway can take up loads in up/down, left/right direction. The application depends on the machine requirements and load directions.

The typical layouts for linear guideway are shown below:

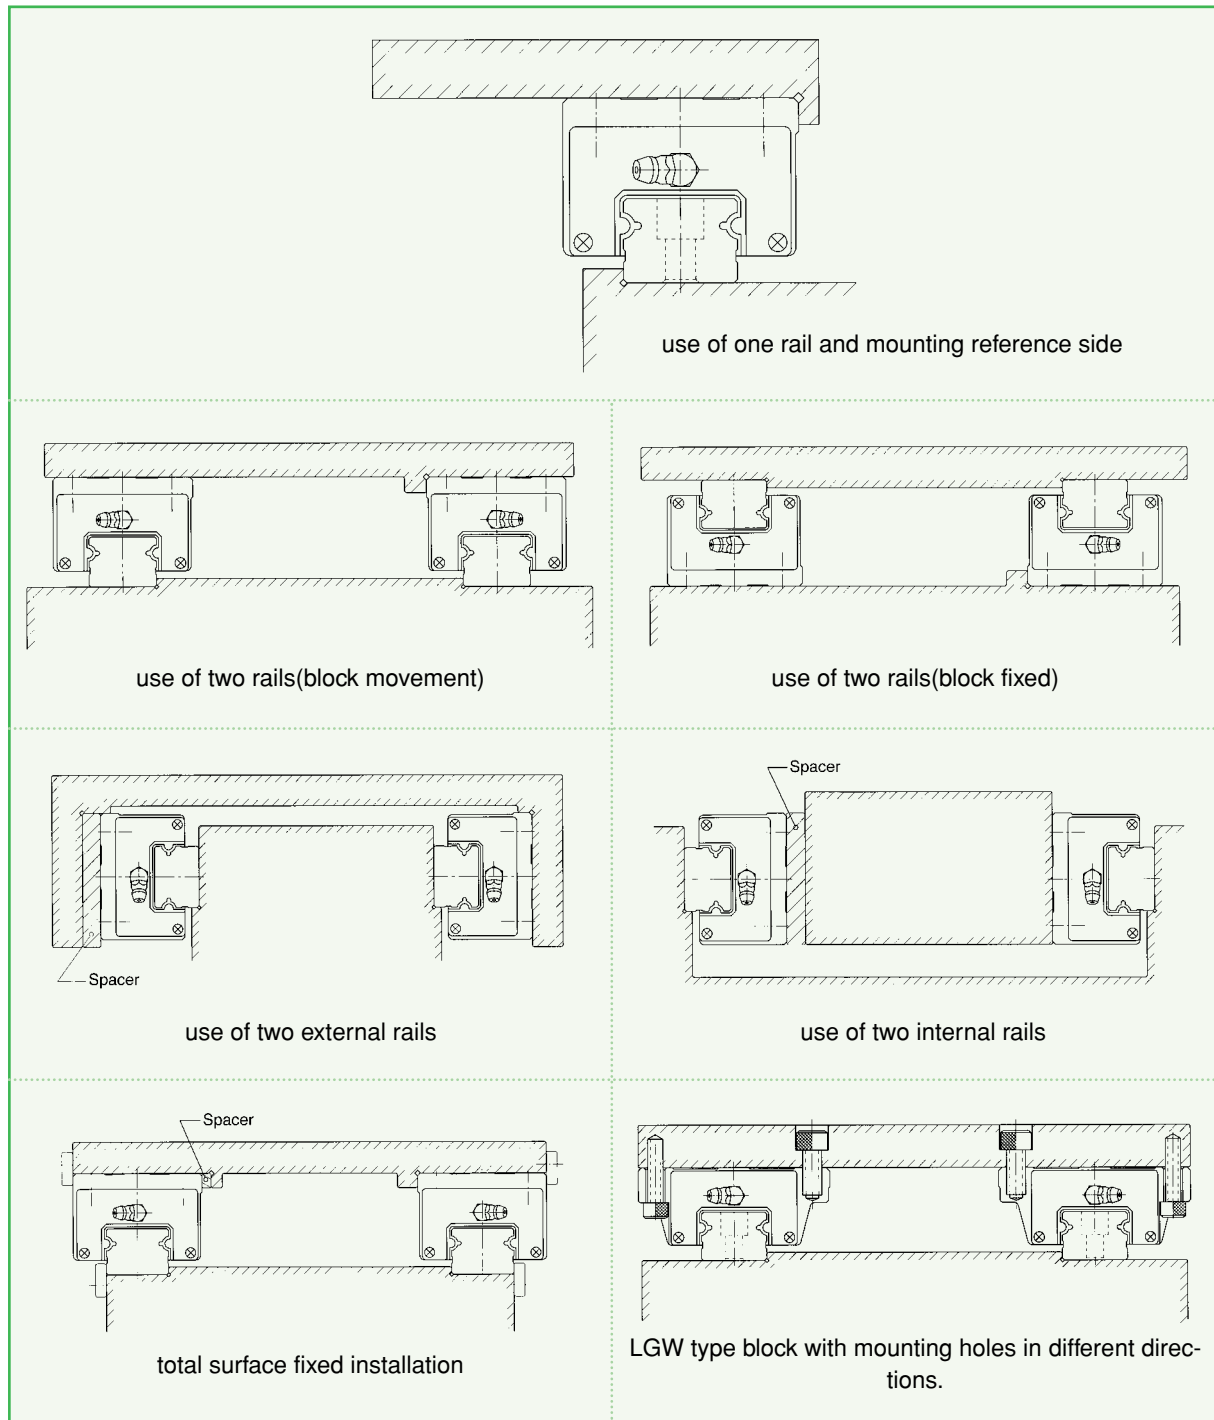


## 1-10 Installation of Linear Guideway


Three installation methods are recommended based on the required running accuracy, the degree of impacts, and vibrations.

### ■ Master and Subsidiary Guide

For non-interchangeable type Linear Guideway, there are some difference between the master guide and subsidiary guide. The accuracy of master guide's side datum plane is better than subsidiary's and it can be a reference side for installation. There is a mark "MA" printed on the rail, show as the figure.

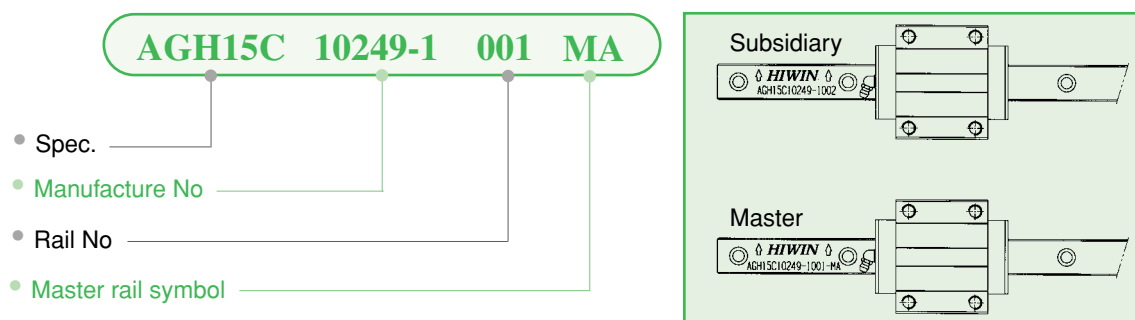


### 1-10-1 Installation Example for Highly Required in Rigidity and Accuracy when Vibration and Impacts

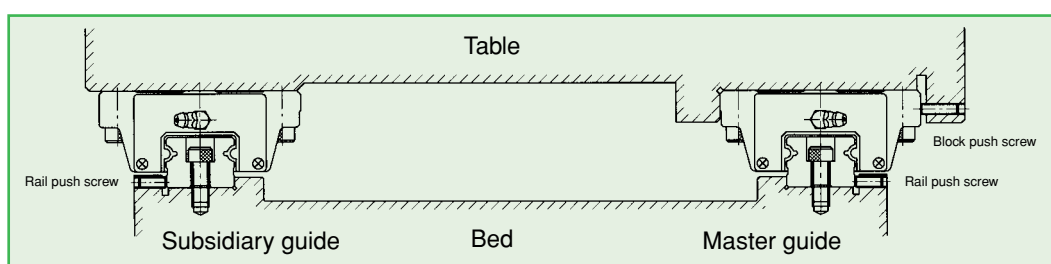


#### (1) Fixing methods

It is possible that the rails and the blocks will be displaced when the machine is subjected to vibrations and impacts. To eliminate these difficulties and achieve high running accuracy, the following four methods are recommended for fixing.

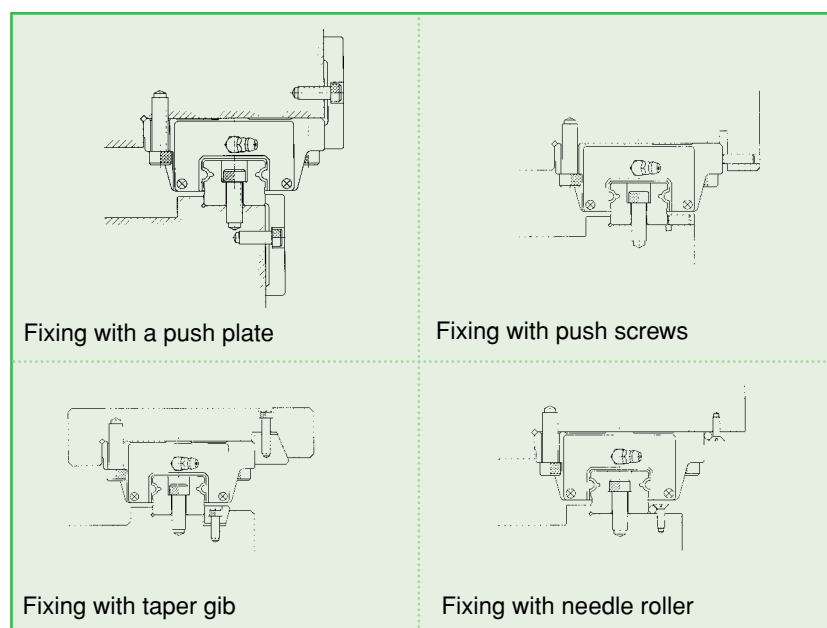





## (2) Installation procedure of the rail

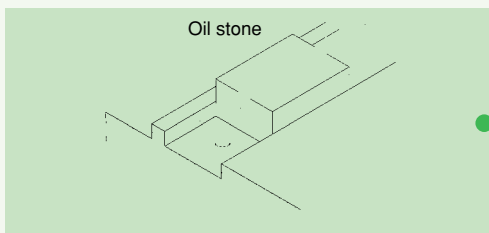


1. Before starting, remove all dirt from the mounting surface of the machine.

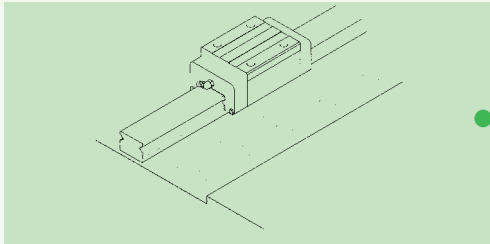


2. Place the linear guideway gently on the bed. Bring the guideway into close contact with the datum plane of the bed.

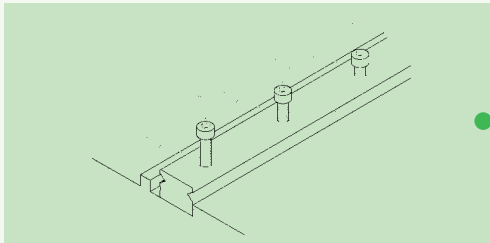

3. Check for correct thread engagement when inserting a bolt into the mounting hole while the rail is being placed on the mounting surface of the bed.

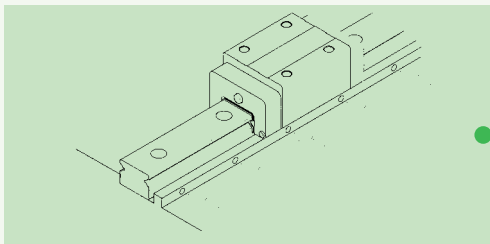


4. Tighten the push screws sequentially to ensure close contact between the rail and the side datum plane.

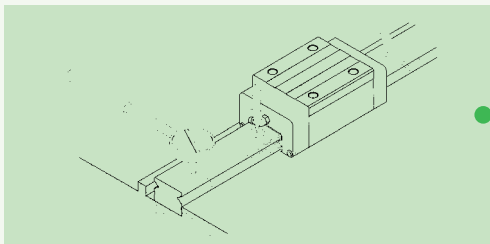

5. Tighten the mounting bolts with a torque wrench to the specified torque. (Refer to table 1.9)
6. Install the remaining linear guideway in the same way.


## (3) Installation procedure of the block

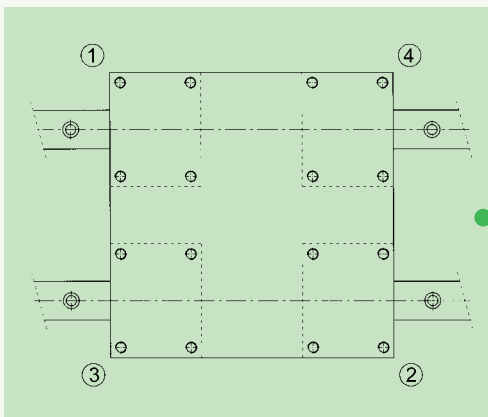


1. Place the table gently on the blocks. Next, tighten the block mounting bolts temporarily.
2. Push the blocks against the datum plane of the table and position the table by tightening the push screws.
3. The table can be fixed uniformly by tightening the mounting bolts on master guide side and subsidiary side in 1 to 4 sequences.

### 1-10-2 Installation Example for the Case when a Rail on the Master Side Has no Push Screws

To ensure the parallelism between the subsidiary guide and the master guide without push screws, the following rail installation methods are recommended. The block installation is the same as which mentioned previously.

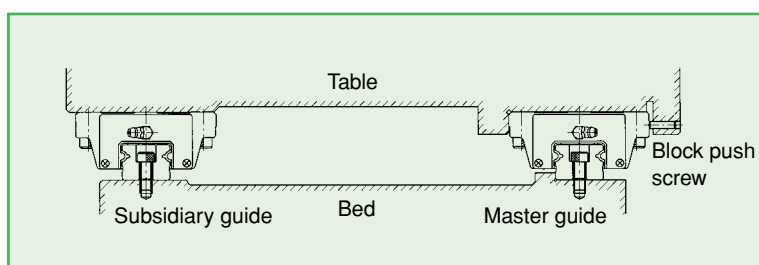


#### (1) Installation of the rail on the master guide side

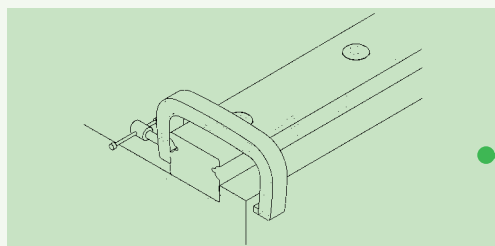

##### ▲ Using a vice


Place the rail into the mounting plane of the bed. Tighten the mounting bolts temporarily; then use a vice to push the rail against the side datum plane of the bed. Tighten the mounting bolts in sequence to the specified torque.

#### (2) Installation of the rail on the subsidiary guide side

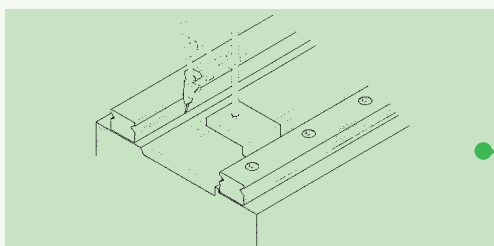


##### ▲ Method with use of a straight edge

Set a straight edge between the rails parallel to the side datum plane of the rail on the master guide side by using a dial gauge. Use the dial gauge to obtain the straight alignment of the rail on the subsidiary guide side. When the rail on the subsidiary guide side is parallel to the master side, tighten the mounting bolts in sequence from one end of the rail to the other.

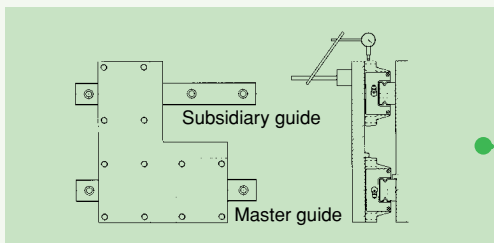


##### ▲ Method with use of a table

Fix two blocks on the master guide side to the table. Temporarily fix the rail and one block on the subsidiary guide side to the bed and the table. Fixed a dial gauge stand on the table surface and bring it into contact with the side of the block on the subsidiary guide side. Move the table from one end of the rail to the other. While aligning the rail on the subsidiary side parallel to the rail on the master guide side, tighten the bolts in sequence.

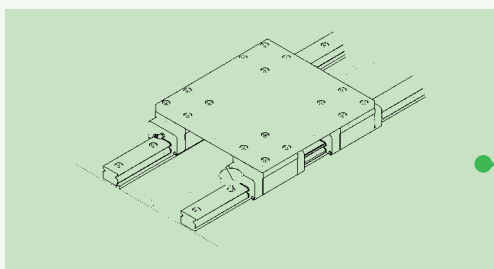

##### ▲ Method following the master guide side


When a rail on the master guide side is correctly tightened, fix both blocks on the master guide side and one of the two blocks on the subsidiary guide side completely on the table. When moving the table from one end of the rail, tighten the mounting bolts on the subsidiary guide side completely.

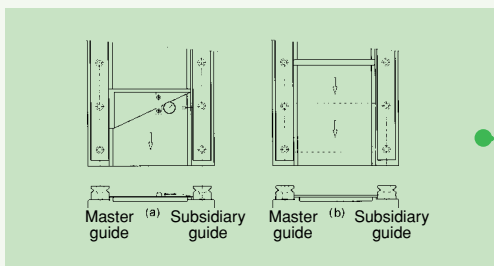

##### ▲ Method with use of a jig


Use a special jig to ensure the rail position on the subsidiary guide side. Tighten the mounting bolts to the specified torque in sequence.

### 1-10-3 Installation Example When There Is No Side Surface of The Bed on The Master Guide Side

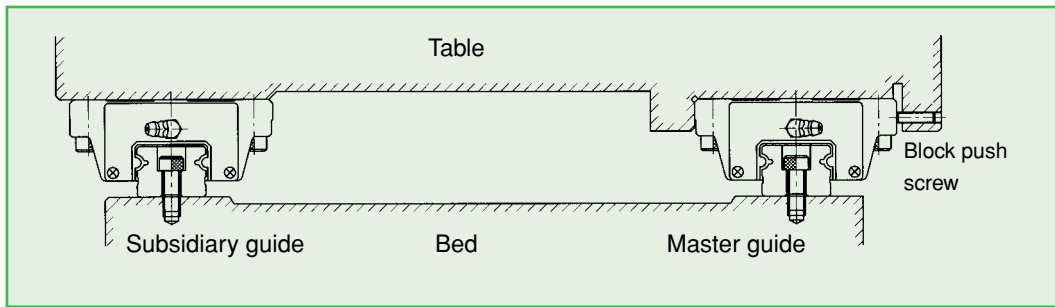


To ensure parallelism between the subsidiary guide and the master guide when there is no side surface, the following rail installation method is recommended. The installation of the blocks is the same as which mentioned previously.

#### (1) Installation of the rail on the master guide side

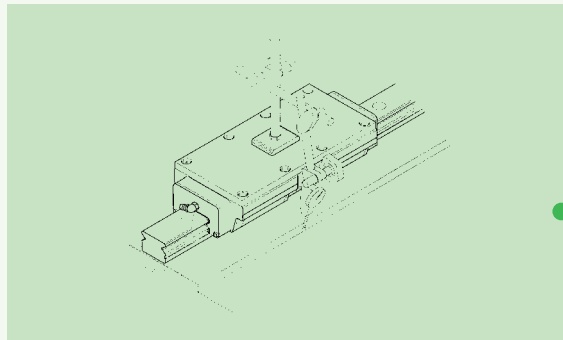

##### ▲ Using a provisional datum plane

Two blocks are fixed in close contact by the measuring plate. A datum plane provided on the bed is used for straight alignment of the rail from one end to the other. Move the blocks and tighten the mounting bolts to the specified torque in sequence.

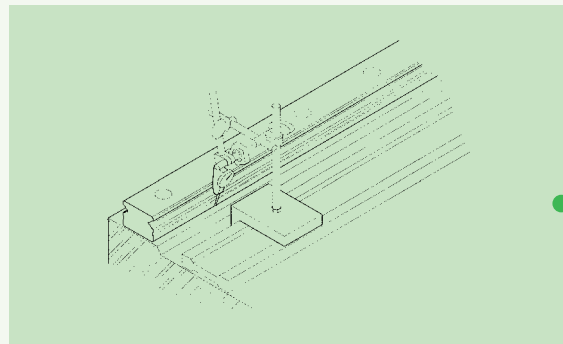

##### ▲ Method with use of a straight edge

Use a dial gauge and a straight edge to confirm the straightness of the side datum plane of the rail from one end to the other. Make sure the mounting bolts are tightened securely in sequence.

#### (2) Installation of the rail on the subsidiary guide side

The method of installation for the rail on the subsidiary guide side is the same as the case without push screws.

## 2. HIWIN Linear Guideway Product Series

### (1) Types & Series

For satisfying various needs of customers, HIWIN has developed many products: LG series for machine tools which require high accuracy and rigidity; the low profile AG series for automation industry; and the miniature MGN/MGW series.

■ Table 2.1 Types & Series

| Series | Assembly Height | Load             | Square Tap hole | Flange   |              |             |
|--------|-----------------|------------------|-----------------|----------|--------------|-------------|
|        |                 |                  |                 | Tap hole | Drilled hole | Combination |
| LG     | ▲ High          | Heavy Load       | LGH - CA        | -        | -            | -           |
|        |                 | Super Heavy Load | LGH - HA        | -        | -            | -           |
|        | ▼ Low           | Heavy Load       | -               | LGW - CA | LGW - CB     | LGW - CC    |
|        |                 | Super Heavy Load | -               | LGW - HA | LGW - HB     | LGW - CC    |
| AG     | ▼ Low           | Medium Load      | AGH - SA        | AGW - SA | AGW - SB     | -           |
|        |                 | Heavy Load       | AGH - CA        | AGW - CA | AGW - CB     | -           |
| MGN    | -               | Standard         | MGN - C         | -        | -            | -           |
|        |                 | Long             | MGN - H         | -        | -            | -           |
| MGW    | -               | Standard         | MGW - C         | -        | -            | -           |
|        |                 | Long             | MGW - H         | -        | -            | -           |

### (2) Accuracy Classes

■ Table 2.2 Accuracy Classes

| Series | Assembly Type |          |               |                      |                      | Interchangeable Type |          |               |
|--------|---------------|----------|---------------|----------------------|----------------------|----------------------|----------|---------------|
|        | Normal (C)    | High (H) | Precision (P) | Super Precision (SP) | Ultra Precision (UP) | Normal (C)           | High (H) | Precision (P) |
| LG     | ●             | ●        | ●             | ●                    | ●                    | ●                    | ●        | ●             |
| AG     | ●             | ●        | ●             | ●                    | ●                    | ●                    | ●        | ●             |
| MGN    | ●             | ●        | ●             | -                    | -                    | ●                    | ●        | ●             |
| MGW    | ●             | ●        | ●             | -                    | -                    | -                    | -        | -             |

### (3) Classification of Preload

■ Table 2.3 Preload


| Series | Assembly Type          |                      |                 |                  |                 |                       | Interchangeable Type   |                      |                |
|--------|------------------------|----------------------|-----------------|------------------|-----------------|-----------------------|------------------------|----------------------|----------------|
|        | C Light Clearance (ZF) | C~UP Very Light (Z0) | C~UP Light (Z1) | H~UP Medium (Z2) | H~UP Heavy (Z3) | H~UP Super Heavy (Z4) | C Light Clearance (ZF) | C~UP Very Light (Z0) | C~P Light (Z1) |
| LG     | ●                      | ●                    | ●               | ●                | ●               | ●                     | ●                      | ●                    | ●              |
| AG     | ●                      | ●                    | ●               | ●                | ●               | -                     | ●                      | ●                    | ●              |
| MGN    | ●                      | ●                    | ●               | -                | -               | -                     | ●                      | ●                    | ●              |
| MGW    | ●                      | ●                    | ●               | -                | -               | -                     | -                      | -                    | -              |

## 2-1 LG Series

### 2-1-1 Features of The LG Series Linear Guideway

The enlarged ball diameter design has increased the stiffness and the loading capacity, and this makes the LG series guideway especially suitable for the application with heavy working load. Besides, the optimum design of circulating system makes the movement smooth. The retainer is designed for avoiding the balls fall out, even if the blocks are removed from the rail while installing.


### 2-1-2 Construction of LG Series

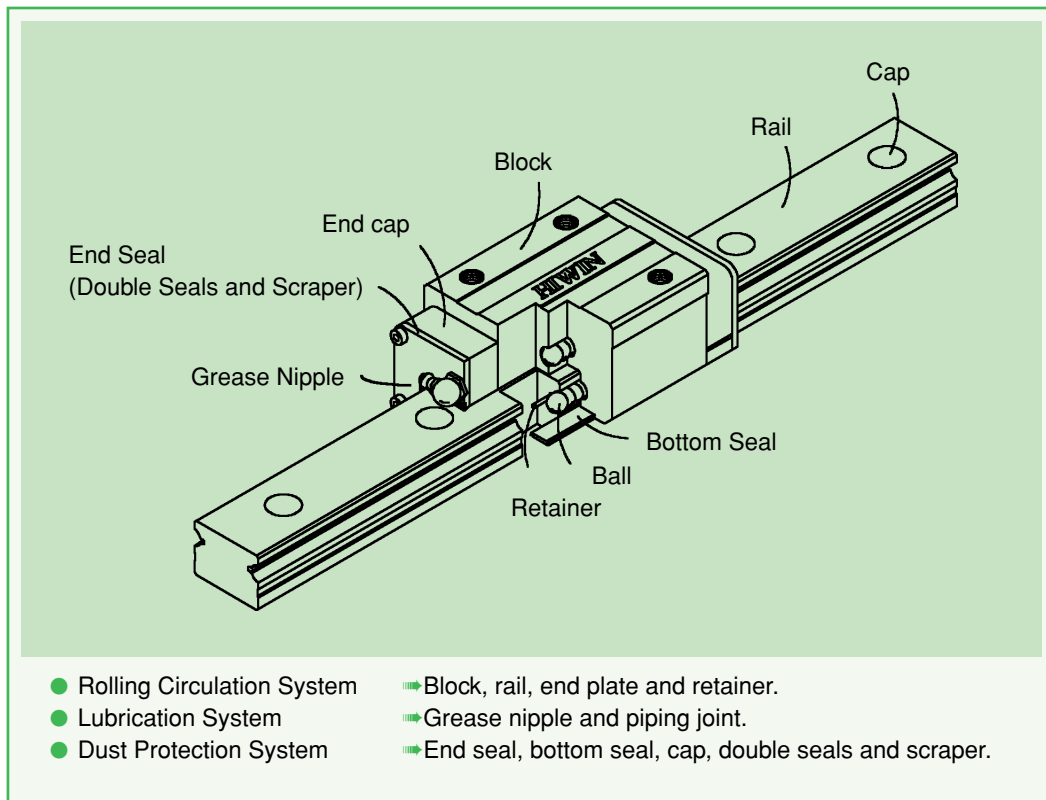

### 2-1-3 Model Number of LG Series

LG series guideway can be classified into non-interchangeable and interchangeable types. The size of two types is same as each other. The main difference between two types is that the interchangeable type of blocks and rails can be freely exchanged, and their accuracy can reach up to P class. Because of the restrictedly dimensional control, the interchangeable type linear guideway is a smart choice for customer when rails don't need to be paired for an axis. The model number of LG series contains the size, type, accuracy class, preload class, etc.


## (1) Non-interchangeable type

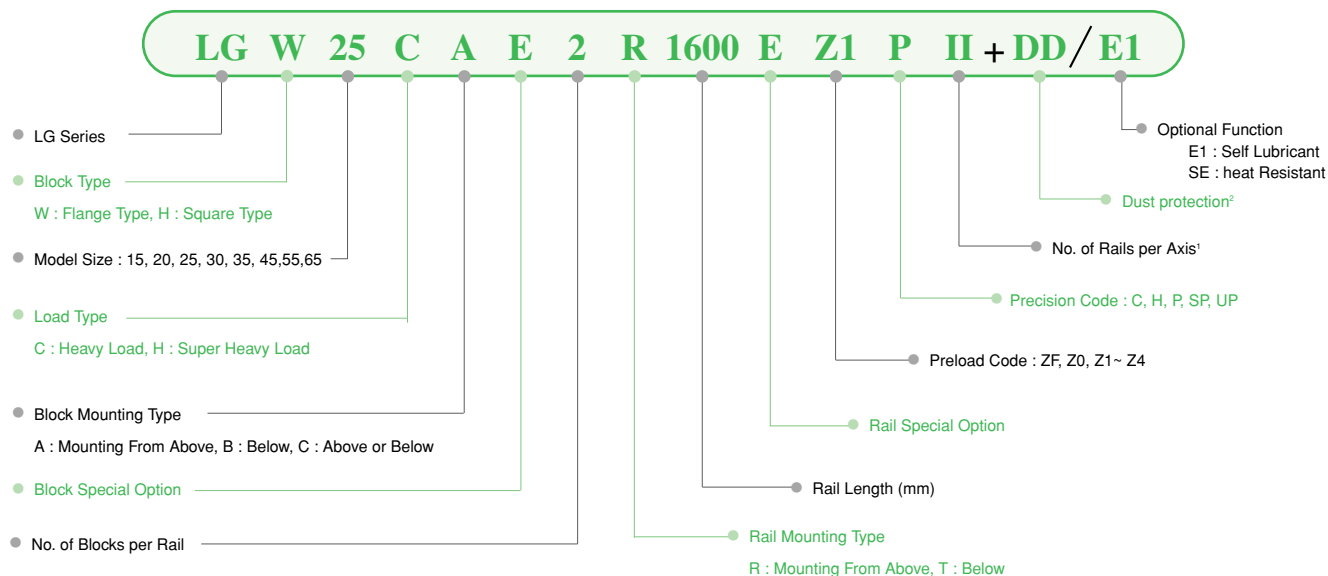


- Note:
1. The Roman numerals used to express the number of rails used in one axis. As for the single rail in an axis, it shows no symbol.
  2. For dust protection, it is no symbol if it is standard(end seal and bottom seal).  
ZZ : End seal, bottom seal and scraper  
KK: Double seals, bottom seal and scraper.  
DD: Double seals and bottom seal

## (2) Interchangeable type

### ◆ Model Number of LG Block

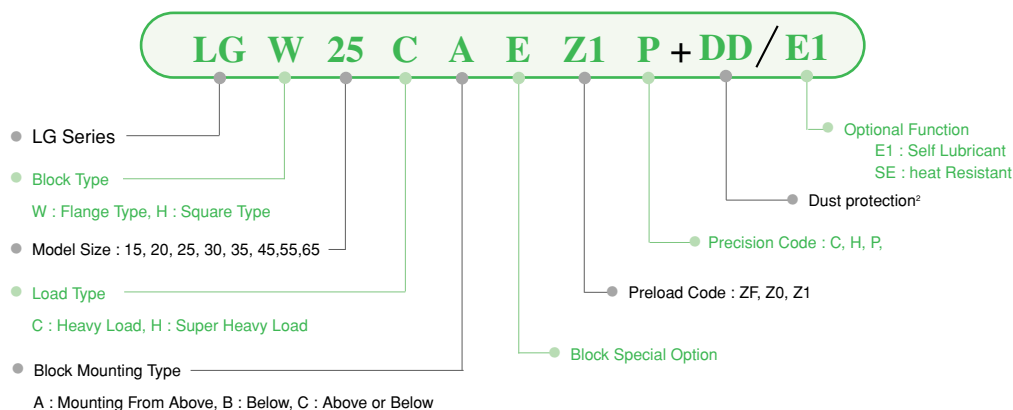

### ◆ Model Number of LG Rail




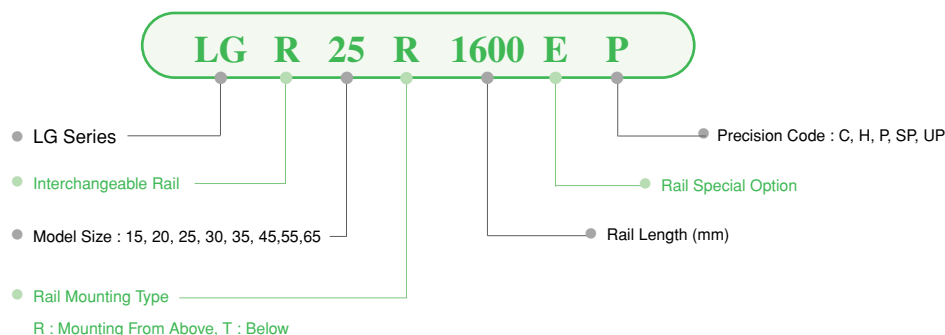


## 2-1-4 LG Types

### (1) Block Types

**HIWIN** offers two types of linear guideway which are flange and square types. Because of the low assembly height and larger mounting surface, the flange type is good for heavy moment load application.



■ Table 2.4 Block Types
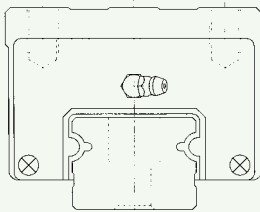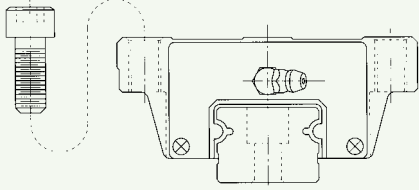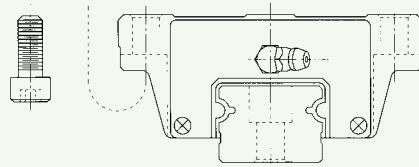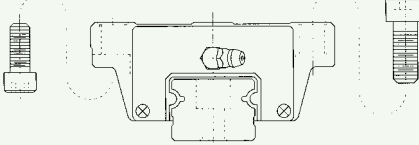
| Type   | Model            | Shape                                                                               | Height<br>(mm) | Rail Length<br>(mm) | Main Application                                                                                                                                                                                                                                                                                                                       |
|--------|------------------|-------------------------------------------------------------------------------------|----------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Square | LGH-CA<br>LGH-HA |    | 28             | 100                 | <ul style="list-style-type: none"> <li>•Machine Center</li> <li>•NC Lathe</li> <li>•Grinding Machine</li> <li>•Precision Machining Machine</li> <li>•Heavy Cutting Machine</li> <li>•Automation Device</li> <li>•Transportation Equipment</li> <li>•Measuring Equipment</li> <li>•Devices Required High Positional Accuracy</li> </ul> |
|        |                  |                                                                                     | ↓<br>90        | ↓<br>4000           |                                                                                                                                                                                                                                                                                                                                        |
| Flange | LGW-CA<br>LGW-HA |    | 24             | 100                 |                                                                                                                                                                                                                                                                                                                                        |
|        |                  |                                                                                     | ↓<br>90        | ↓<br>4000           |                                                                                                                                                                                                                                                                                                                                        |
|        | LGW-CB<br>LGW-HB |  | 24             | 100                 |                                                                                                                                                                                                                                                                                                                                        |
|        |                  |                                                                                     | ↓<br>90        | ↓<br>4000           |                                                                                                                                                                                                                                                                                                                                        |
|        | LGW-CC<br>LGW-HC |  | 24             | 100                 |                                                                                                                                                                                                                                                                                                                                        |
|        |                  |                                                                                     | ↓<br>90        | ↓<br>4000           |                                                                                                                                                                                                                                                                                                                                        |

### (2) Rail Types

Besides the standard top mounting type, **HIWIN** also offers the bottom mounting type of rails to customers.


■ Table 2.5 Rail Types
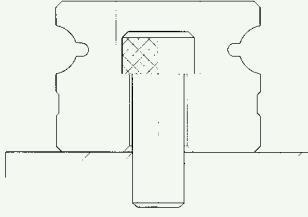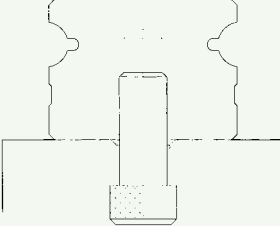
| Mounting from Above                                                                 | Mounting from below                                                                  |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |

### 2-1-5 Accuracy Classes

The accuracy of LG series can be classified into normal(C), high(H), precision(P), super precision(SP), ultra precision (UP), five classes. Choosing the class by referencing the accuracy of applied equipment.

#### (1) Accuracy of non-interchangeable LG

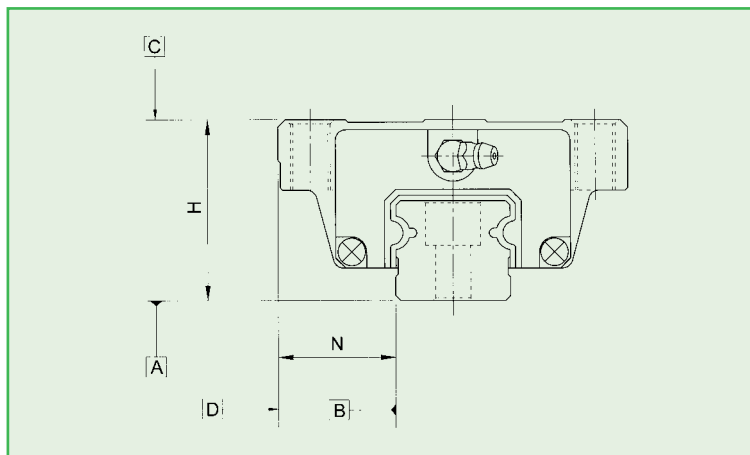

■ Table 2.6 Accuracy Standards

| Unit mm                                             |                                    | LG - 15, 20    |             |                  |                         |                         |
|-----------------------------------------------------|------------------------------------|----------------|-------------|------------------|-------------------------|-------------------------|
| Item                                                |                                    | Normal<br>(C)  | High<br>(H) | Precision<br>(P) | Super Precision<br>(SP) | Ultra Precision<br>(UP) |
| Dimension tolerance of height H                     |                                    | ± 0.1          | ± 0.03      | 0<br>- 0.03      | 0<br>- 0.015            | 0<br>- 0.008            |
| Dimension tolerance of width N                      |                                    | ± 0.1          | ± 0.03      | 0<br>- 0.03      | 0<br>- 0.015            | 0<br>- 0.008            |
| Pair                                                | Variation of height H              | 0.02           | 0.01        | 0.006            | 0.004                   | 0.003                   |
|                                                     | Variation of width N (Master Rail) | 0.02           | 0.01        | 0.006            | 0.004                   | 0.003                   |
| Preload classes                                     |                                    | ZF, Z0, Z1     | Z0 ~ Z3     |                  |                         |                         |
| Running parallelism of block surface C to surface A |                                    | See Table 2.14 |             |                  |                         |                         |
| Running parallelism of block surface D to surface B |                                    | See Table 2.14 |             |                  |                         |                         |

■ Table 2.7 Accuracy Standards

| Unit mm                                             |                                    | LG - 25, 30, 35 |             |                  |                         |                         |
|-----------------------------------------------------|------------------------------------|-----------------|-------------|------------------|-------------------------|-------------------------|
| Item                                                |                                    | Normal<br>(C)   | High<br>(H) | Precision<br>(P) | Super Precision<br>(SP) | Ultra Precision<br>(UP) |
| Dimension tolerance of height H                     |                                    | ± 0.1           | ± 0.04      | 0<br>- 0.04      | 0<br>- 0.02             | 0<br>- 0.01             |
| Dimension tolerance of width N                      |                                    | ± 0.1           | ± 0.04      | 0<br>- 0.04      | 0<br>- 0.02             | 0<br>- 0.01             |
| Pair                                                | Variation of height H              | 0.02            | 0.015       | 0.007            | 0.005                   | 0.003                   |
|                                                     | Variation of width N (Master Rail) | 0.03            | 0.015       | 0.007            | 0.005                   | 0.003                   |
| Preload classes                                     |                                    | ZF, Z0, Z1      | Z0 ~ Z4     |                  |                         |                         |
| Running parallelism of block surface C to surface A |                                    | See Table 2.14  |             |                  |                         |                         |
| Running parallelism of block surface D to surface B |                                    | See Table 2.14  |             |                  |                         |                         |



■ Table 2.8 Accuracy Standards

| Unit mm                                             |                                    | LG - 45, 55    |             |                  |                         |                         |
|-----------------------------------------------------|------------------------------------|----------------|-------------|------------------|-------------------------|-------------------------|
| Item                                                |                                    | Normal<br>(C)  | High<br>(H) | Precision<br>(P) | Super Precision<br>(SP) | Ultra Precision<br>(UP) |
| Dimension tolerance of height H                     |                                    | ± 0.1          | ± 0.05      | 0<br>- 0.05      | 0<br>- 0.03             | 0<br>- 0.02             |
| Dimension tolerance of width N                      |                                    | ± 0.1          | ± 0.05      | 0<br>- 0.05      | 0<br>- 0.03             | 0<br>- 0.02             |
| Pair                                                | Variation of height H              | 0.03           | 0.015       | 0.007            | 0.005                   | 0.003                   |
|                                                     | Variation of width N (Master Rail) | 0.03           | 0.02        | 0.01             | 0.007                   | 0.005                   |
| Preload classes                                     |                                    | ZF, Z0, Z1     | Z0 ~ Z4     |                  |                         |                         |
| Running parallelism of block surface C to surface A |                                    | See Table 2.14 |             |                  |                         |                         |
| Running parallelism of block surface D to surface B |                                    | See Table 2.14 |             |                  |                         |                         |

■ Table 2.9 Accuracy Standards

| Unit mm                                             |                                    | LG - 65        |             |                  |                         |                         |
|-----------------------------------------------------|------------------------------------|----------------|-------------|------------------|-------------------------|-------------------------|
| Item                                                |                                    | Normal<br>(C)  | High<br>(H) | Precision<br>(P) | Super Precision<br>(SP) | Ultra Precision<br>(UP) |
| Dimension tolerance of height H                     |                                    | ± 0.1          | ± 0.07      | 0<br>- 0.07      | 0<br>- 0.05             | 0<br>- 0.03             |
| Dimension tolerance of width N                      |                                    | ± 0.1          | ± 0.07      | 0<br>- 0.07      | 0<br>- 0.05             | 0<br>- 0.03             |
| Pair                                                | Variation of height H              | 0.03           | 0.02        | 0.01             | 0.007                   | 0.005                   |
|                                                     | Variation of width N (Master Rail) | 0.03           | 0.025       | 0.015            | 0.01                    | 0.007                   |
| Preload classes                                     |                                    | ZF, Z0, Z1     | Z0 ~ Z4     |                  |                         |                         |
| Running parallelism of block surface C to surface A |                                    | See Table 2.14 |             |                  |                         |                         |
| Running parallelism of block surface D to surface B |                                    | See Table 2.14 |             |                  |                         |                         |

## (2) Accuracy of interchangeable LG

■ Table 2.10 Accuracy Standards

| Unit mm                                             |                       | LG - 15, 20    |             |                  |
|-----------------------------------------------------|-----------------------|----------------|-------------|------------------|
| Item                                                |                       | Normal<br>(C)  | High<br>(H) | Precision<br>(P) |
| Dimension tolerance of height H                     |                       | ± 0.1          | ± 0.03      | ± 0.015          |
| Dimension tolerance of width N                      |                       | ± 0.1          | ± 0.03      | ± 0.015          |
| Pair                                                | Variation of height H | 0.02           | 0.01        | 0.006            |
|                                                     | Variation of width N  | 0.02           | 0.01        | 0.006            |
| Pair variation of height H (multi sets)             |                       | 0.06           | 0.04        | 0.026            |
| Preload classes                                     |                       | ZF, Z0, Z1     | Z0, Z1      |                  |
| Running parallelism of block surface C to surface A |                       | See Table 2.14 |             |                  |
| Running parallelism of block surface D to surface B |                       | See Table 2.14 |             |                  |

■ Table 2.11 Accuracy Standards

| Unit mm                                             |                       | LG - 25, 30, 35 |             |                  |
|-----------------------------------------------------|-----------------------|-----------------|-------------|------------------|
| Item                                                |                       | Normal<br>(C)   | High<br>(H) | Precision<br>(P) |
| Dimension tolerance of height H                     |                       | ± 0.1           | ± 0.04      | ± 0.02           |
| Dimension tolerance of width N                      |                       | ± 0.1           | ± 0.04      | ± 0.02           |
| Pair                                                | Variation of height H | 0.02            | 0.015       | 0.007            |
|                                                     | Variation of width N  | 0.03            | 0.015       | 0.007            |
| Pair variation of height H (multi sets)             |                       | 0.06            | 0.045       | 0.027            |
| Preload classes                                     |                       | ZF, Z0, Z1      | Z0, Z1      |                  |
| Running parallelism of block surface C to surface A |                       | See Table 2.14  |             |                  |
| Running parallelism of block surface D to surface B |                       | See Table 2.14  |             |                  |

■ Table 2.12 Accuracy Standards

| Unit mm                                             |                       | LG - 45, 55    |             |                  |
|-----------------------------------------------------|-----------------------|----------------|-------------|------------------|
| Item                                                |                       | Normal<br>(C)  | High<br>(H) | Precision<br>(P) |
| Dimension tolerance of height H                     |                       | ± 0.1          | ± 0.05      | ± 0.025          |
| Dimension tolerance of width N                      |                       | ± 0.1          | ± 0.05      | ± 0.025          |
| Pair                                                | Variation of height H | 0.03           | 0.015       | 0.007            |
|                                                     | Variation of width N  | 0.03           | 0.02        | 0.01             |
| Pair variation of height H (multi sets)             |                       | 0.07           | 0.045       | 0.027            |
| Preload classes                                     |                       | ZF, Z0, Z1     | Z0, Z1      |                  |
| Running parallelism of block surface C to surface A |                       | See Table 2.14 |             |                  |
| Running parallelism of block surface D to surface B |                       | See Table 2.14 |             |                  |

■ Table 2.13 Accuracy Standards

| Unit mm                                             |                       | LG - 65        |             |                  |
|-----------------------------------------------------|-----------------------|----------------|-------------|------------------|
| Item                                                |                       | Normal<br>(C)  | High<br>(H) | Precision<br>(P) |
| Dimension tolerance of height H                     |                       | ± 0.1          | ± 0.07      | ± 0.035          |
| Dimension tolerance of width N                      |                       | ± 0.1          | ± 0.07      | ± 0.035          |
| Pair                                                | Variation of height H | 0.03           | 0.02        | 0.01             |
|                                                     | Variation of width N  | 0.03           | 0.025       | 0.015            |
| Pair variation of height H (multi sets)             |                       | 0.07           | 0.05        | 0.03             |
| Preload classes                                     |                       | ZF, Z0, Z1     | Z0, Z1      |                  |
| Running parallelism of block surface C to surface A |                       | See Table 2.14 |             |                  |
| Running parallelism of block surface D to surface B |                       | See Table 2.14 |             |                  |

### (3) Accuracy of Running Parallelism


Table 2.14 Accuracy of running parallelism

| Rail Length (mm) | Accuracy (μm) |    |    |    |    |
|------------------|---------------|----|----|----|----|
|                  | C             | H  | P  | SP | UP |
| 100 以下           | 12            | 7  | 3  | 2  | 2  |
| 100 ~ 200        | 14            | 9  | 4  | 2  | 2  |
| 200 ~ 300        | 15            | 10 | 5  | 3  | 2  |
| 300 ~ 500        | 17            | 12 | 6  | 3  | 2  |
| 500 ~ 700        | 20            | 13 | 7  | 4  | 2  |
| 700 ~ 900        | 22            | 15 | 8  | 5  | 3  |
| 900 ~ 1,100      | 24            | 16 | 9  | 6  | 3  |
| 1,100 ~ 1,500    | 26            | 18 | 11 | 7  | 4  |
| 1,500 ~ 1,900    | 28            | 20 | 13 | 8  | 4  |
| 1,900 ~ 2,500    | 31            | 22 | 15 | 10 | 5  |
| 2,500 ~ 3,100    | 33            | 25 | 18 | 11 | 6  |
| 3,100 ~ 3,600    | 36            | 27 | 20 | 14 | 7  |
| 3,600 ~ 4,000    | 37            | 28 | 21 | 15 | 7  |

#### 2-1-6 Preload

##### (1) Definition

A preload can be applied to each guideway. Oversized balls are used. Generally, a linear motion guideway has a negative clearance between groove and balls in order to improve stiffness and maintain high precision. Figure shows that rigidity is doubled at the point where the load is  $2\sqrt{2}$  times the preload and the deflection is one half.

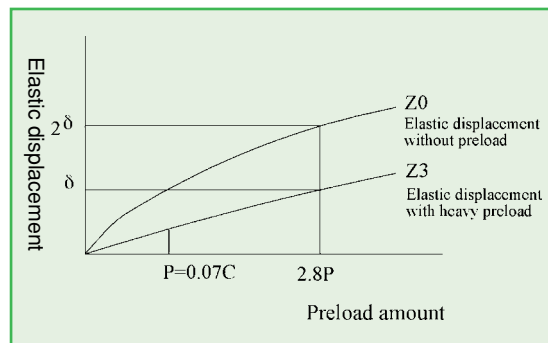

##### (2) Preload classes

HIWIN offers six standard preloads for various applications and conditions.

Table 2.15 Preload Classes

| Class               | Code | Preload              | Accuracy | Examples of Application                                                                                            |
|---------------------|------|----------------------|----------|--------------------------------------------------------------------------------------------------------------------|
| Light Clearance     | ZF   | Clearance<br>4~10 μm | C        | Automation industry                                                                                                |
| Very Light Preload  | Z0   | 0                    | C~UP     | Transportation devices, auto-packing machines                                                                      |
| Light Preload       | Z1   | 0.02C                | C~UP     | X-Y axis for general industrial machines, welding machines, welders                                                |
| Medium Preload      | Z2   | 0.05C                | H~UP     | Z axis for general industrial machines, EDM, NC lathes, Precision X-Y tables, measuring equipment                  |
| Heavy Preload       | Z3   | 0.07C                | H~UP     | Machining centers, grinding machines, NC lathes, horizontal and vertical milling machines, Z axis of machine tools |
| Super Heavy Preload | Z4   | 0.13C                | H~UP     | Heavy cutting machines                                                                                             |

NOTE : The C in preload column means basic dynamic load rating.

### 2-1-7 Stiffness

To confirm the impact on accuracy, Table 2.16 could be used to calculate the deflection of linear guideway.

$$\delta = \frac{P}{k} \mu\text{m} \quad \text{Equal. 2.1}$$

$\delta$  : Deflection  
 P : Working load (kgf)  
 k : Value of rigidity


■ Table 2.16 Value of rigidity

| Type             | Size   | Z0<br>kgf/ $\mu\text{m}$ | Z1<br>kgf/ $\mu\text{m}$ | Z2<br>kgf/ $\mu\text{m}$ | Z3<br>kgf/ $\mu\text{m}$ | Z4<br>kgf/ $\mu\text{m}$ |
|------------------|--------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Heavy load       | LG 15C | 19                       | 24                       | 28                       | 30                       | -                        |
|                  | LG 20C | 26                       | 33                       | 38                       | 41                       | -                        |
|                  | LG 25C | 28                       | 36                       | 42                       | 45                       | 52                       |
|                  | LG 30C | 35                       | 45                       | 52                       | 56                       | 65                       |
|                  | LG 35C | 41                       | 52                       | 60                       | 65                       | 74                       |
|                  | LG 45C | 50                       | 64                       | 74                       | 79                       | 92                       |
|                  | LG 55C | 58                       | 74                       | 86                       | 92                       | 106                      |
|                  | LG 65C | 70                       | 89                       | 104                      | 111                      | 128                      |
| Super heavy load | LG 20H | 32                       | 41                       | 47                       | 51                       | -                        |
|                  | LG 25H | 37                       | 47                       | 54                       | 58                       | 67                       |
|                  | LG 30H | 45                       | 57                       | 66                       | 70                       | 81                       |
|                  | LG 35H | 51                       | 65                       | 76                       | 81                       | 94                       |
|                  | LG 45H | 65                       | 83                       | 96                       | 103                      | 118                      |
|                  | LG 55H | 75                       | 96                       | 111                      | 119                      | 137                      |
|                  | LG 65H | 92                       | 117                      | 135                      | 145                      | 167                      |


### 2-1-8 Lubrication

#### (1) Grease

##### ◆ 1 Grease Nipple

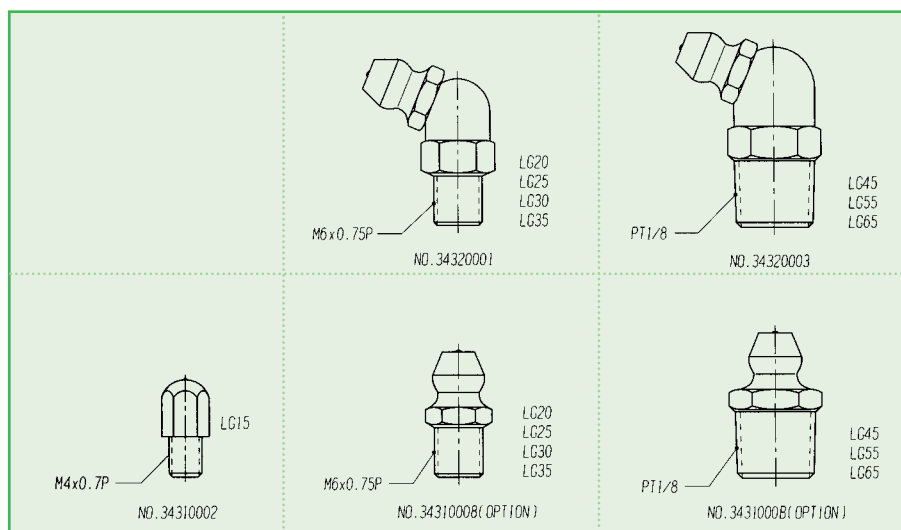

### ◆ 2 Mounting Location

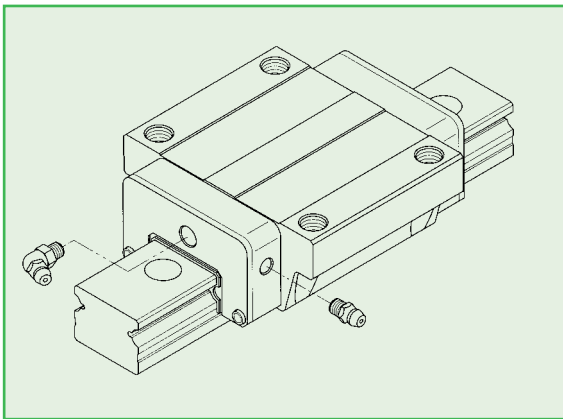

The standard location of the grease fitting is at both ends of the block, but the nipple may optionally be mounted in the side of block. As for the lateral installation, we recommended that the nipple should be mounted at the non-reference side, otherwise please contact us. It is possible to carry out the lubrication by using the oil-piping joint.

### ◆ 3 The Oil Amount for a Block Full with Grease

■ Table 2.17 The Oil Amount for a Block Full with Grease

| Size  | Heavy load<br>(cm <sup>3</sup> ) | Super heavy load<br>(cm <sup>3</sup> ) | Size  | Heavy load<br>(cm <sup>3</sup> ) | Super heavy load<br>(cm <sup>3</sup> ) |
|-------|----------------------------------|----------------------------------------|-------|----------------------------------|----------------------------------------|
| LG 15 | 1                                | -                                      | LG 35 | 10                               | 12                                     |
| LG 20 | 2                                | 3                                      | LG 45 | 17                               | 21                                     |
| LG 25 | 5                                | 6                                      | LG 55 | 26                               | 33                                     |
| LG 30 | 7                                | 8                                      | LG 65 | 50                               | 61                                     |


### ◆ 4 Frequency of Replenishment

Replenishing the oil every 100km

## (2) Oil

The recommended viscosity of oil is about 30~150cst. If customers need to use the oil-type lubrication, please inform us, the block will not be prelubricated with grease before shipment.

### ◆ 1 Types of Oil Piping Joint.

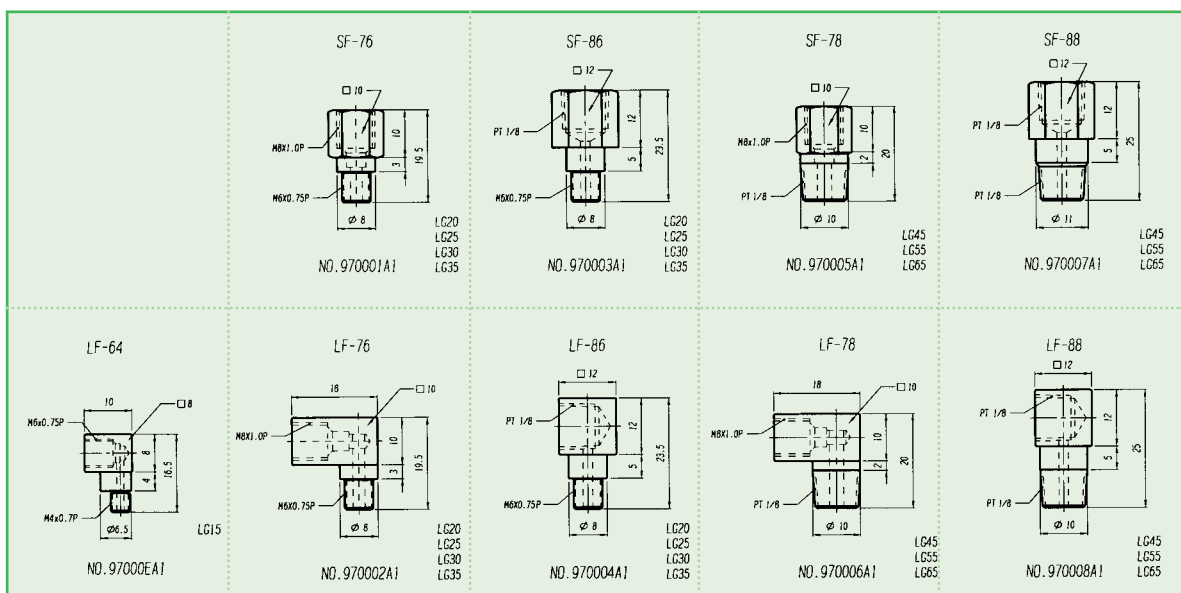





## ◆ 2 Oil Feeding Rate

■ Table 2.18

| Size | Feeding rate (cm <sup>3</sup> /hr) | Size | Feeding rate (cm <sup>3</sup> /hr) |
|------|------------------------------------|------|------------------------------------|
| LG15 | 0.2                                | LG35 | 0.3                                |
| LG20 | 0.2                                | LG45 | 0.4                                |
| LG25 | 0.3                                | LG55 | 0.5                                |
| LG30 | 0.3                                | LG65 | 0.6                                |

**2-1-9 Dust Protection Equipment****(1) Code of equipment**

If the following equipment is needed, please add the code followed by the model number.
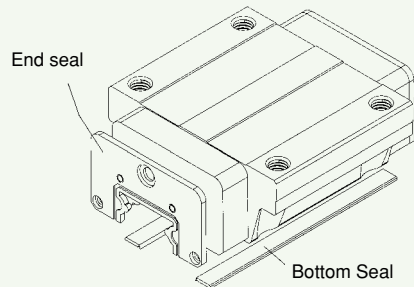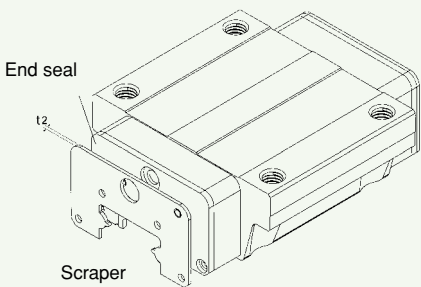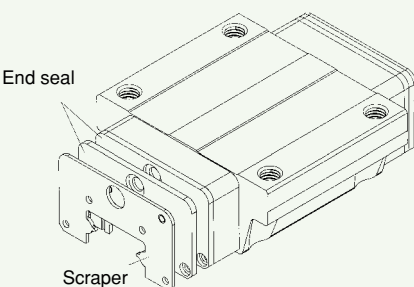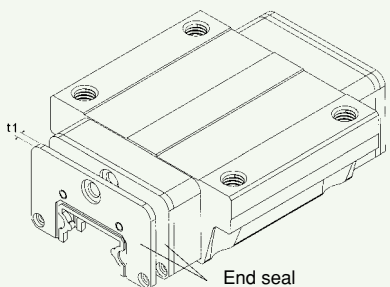
|                                                                                                                                                                                         |                                                                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>End seal</p> <p>Bottom Seal</p> <p><b>No code: Standard equipment (End seal + Bottom Seal)</b></p> |  <p>End seal</p> <p>Scraper</p> <p><b>ZZ (End seal + Bottom Seal + Scraper)</b></p> |
|  <p>End seal</p> <p>Scraper</p> <p><b>KK (Double seals + Bottom Seal + Scraper)</b></p>              |  <p>End seal</p> <p><b>DD (Double seals + Bottom Seal)</b></p>                    |

**(2) End seal and bottom seal**

To prevent the life reduction from the groove surface damaged by iron chips or dust entering the block.

**(3) Double seals**

Enhancing the wiping effect, the foreign matters can be completely wiped out of block.

■ Table 2.19 Order number of End seal

| Size | Part No. | Thickness(t1)<br>mm | Size | Part No. | Thickness(t1)<br>mm |
|------|----------|---------------------|------|----------|---------------------|
| LG15 | 920001A1 | 1.8                 | LG35 | 920005A1 | 2.8                 |
| LG20 | 920002A1 | 2                   | LG45 | 920006A1 | 2.5                 |
| LG25 | 920003A1 | 2.5                 | LG55 | 920007A1 | 5                   |
| LG30 | 920004A1 | 2.8                 | LG65 | 920008A1 | 5                   |

#### (4) Scraper


The scraper has the ability of isolating the high-temp. iron chips and removing the big foreign matters.

■ Table 2.20 Order number of Scraper

| Size | Part No. | Thickness(t1)<br>mm | Size | Part No. | Thickness(t1)<br>mm |
|------|----------|---------------------|------|----------|---------------------|
| LG15 | 980001A1 | 1.5                 | LG35 | 980005A1 | 1.5                 |
| LG20 | 980002A1 | 1.5                 | LG45 | 980006A1 | 1.5                 |
| LG25 | 980003A1 | 1.5                 | LG55 | 980007A1 | 1.7                 |
| LG30 | 980004A1 | 1.5                 | LG65 | 980008A1 | 1.7                 |

#### (5) Caps for rail mounting holes

The caps are used to cover the mounting holes to prevent chips or other foreign matters from entering the holes. The caps will be enclosed in each rail packing

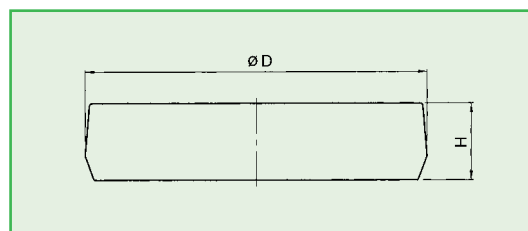

■ Table 2.21 Caps for rail mounting holes

| Rail size | Bolt size | Part No. | Diameter(D)mm | Thickness(H)mm |
|-----------|-----------|----------|---------------|----------------|
| LGR15     | M4        | 950002C1 | 7.7           | 1.1            |
| LGR20     | M5        | 950003C1 | 9.7           | 2.2            |
| LGR25     | M6        | 950004C1 | 11.3          | 2.5            |
| LGR30     | M8        | 950005C1 | 14.3          | 3.3            |
| LGR35     | M8        | 950005C1 | 14.3          | 3.3            |
| LGR45     | M12       | 950007C1 | 20.3          | 4.6            |
| LGR55     | M14       | 950008A1 | 23.5          | 5.5            |
| LGR65     | M16       | 950009A1 | 26.6          | 5.5            |

#### 2-1-10 Friction

The maximum value of seal resistance per block are shown in the table.

■ Table 2.22 Seal resistance

| Size  | Resistance (kgf) | Size  | Resistance (kgf) |
|-------|------------------|-------|------------------|
| LG 15 | 0.3              | LG 35 | 0.8              |
| LG 20 | 0.4              | LG 45 | 1                |
| LG 25 | 0.5              | LG 55 | 1.2              |
| LG 30 | 0.7              | LG 65 | 1.5              |

## 2-1-11 The Accuracy Tolerance of Mounting Surface


### (1) The accuracy tolerance of rail-mounting surface

Because of the Gothic contact design, the linear guideway is possessed with high rigidity. As for this characteristic, any unreasonable deviation will not only increase the friction resistance, but also reduce the life.

As long as following the accuracy requirements of mounting surface, the high accuracy and rigidity of linear motion guideway should be obtained without any difficulty.

In order to satisfy the needs of fast installation and smooth movement, HIWIN offers the normal clearance type of preload to customers for its high absorption ability for the deviation of mounting surface accuracy.

#### ◆ 1 The parallelism tolerance of reference surface (P)

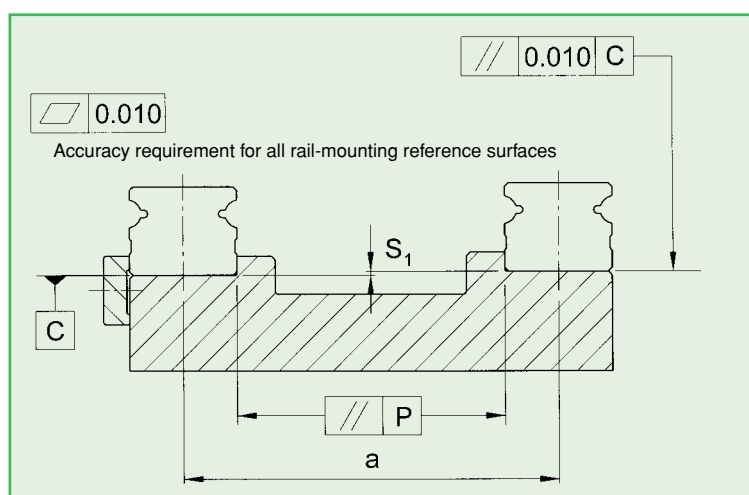

■ Table 2.23 Max. Parallelism Tolerance(P)

Unit : mm

| Size  | Preload classes |       |       |       |       |       |
|-------|-----------------|-------|-------|-------|-------|-------|
|       | ZF              | Z0    | Z1    | Z2    | Z3    | Z4    |
| LG 15 | 0.023           | 0.014 | 0.010 | 0.007 | 0.005 | —     |
| LG 20 | 0.026           | 0.016 | 0.011 | 0.008 | 0.006 | 0.005 |
| LG 25 | 0.028           | 0.017 | 0.012 | 0.009 | 0.007 | 0.006 |
| LG 30 | 0.032           | 0.021 | 0.015 | 0.012 | 0.009 | 0.007 |
| LG 35 | 0.035           | 0.023 | 0.017 | 0.014 | 0.011 | 0.008 |
| LG 45 | 0.040           | 0.027 | 0.020 | 0.016 | 0.013 | 0.010 |
| LG 55 | 0.050           | 0.036 | 0.026 | 0.020 | 0.017 | 0.012 |
| LG 65 | 0.060           | 0.045 | 0.032 | 0.025 | 0.021 | 0.015 |

#### ◆ 2 The accuracy tolerance of reference surface height (S<sub>1</sub>)

$$S_1 = a \times K \text{ ..... Equal. 2.2}$$

S<sub>1</sub> : Max. tolerance of height

a : distance between paired rails

K : coefficient of tolerance of height


■ Table 2.24 Max. Tolerance of Height

| Size | Preload classes      |                      |                      |                      |                      |                      |
|------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
|      | ZF                   | Z0                   | Z1                   | Z2                   | Z3                   | Z4                   |
| K    | $5.5 \times 10^{-4}$ | $4.1 \times 10^{-4}$ | $2.7 \times 10^{-4}$ | $2.2 \times 10^{-4}$ | $1.7 \times 10^{-4}$ | $1.2 \times 10^{-4}$ |



## (2) The accuracy tolerance of block-mounting surface


- ◆ 1 The tolerance of the height of reference surface when two or more pieces are used in parallel ( $S_2$ )

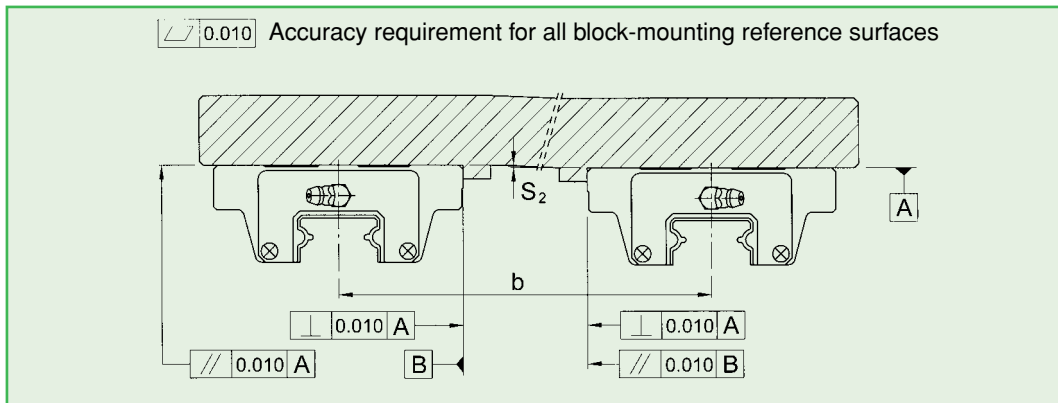

$$S_2 = b \times 4.2 \times 10^{-5} \text{ ..... Equal. 2.3}$$

$S_2$  : Max. tolerance of height  
 $b$  : distance between paired blocks

- ◆ 1 The accuracy tolerance of mounting reference surface for paired blocks at the rail ( $S_3$ )

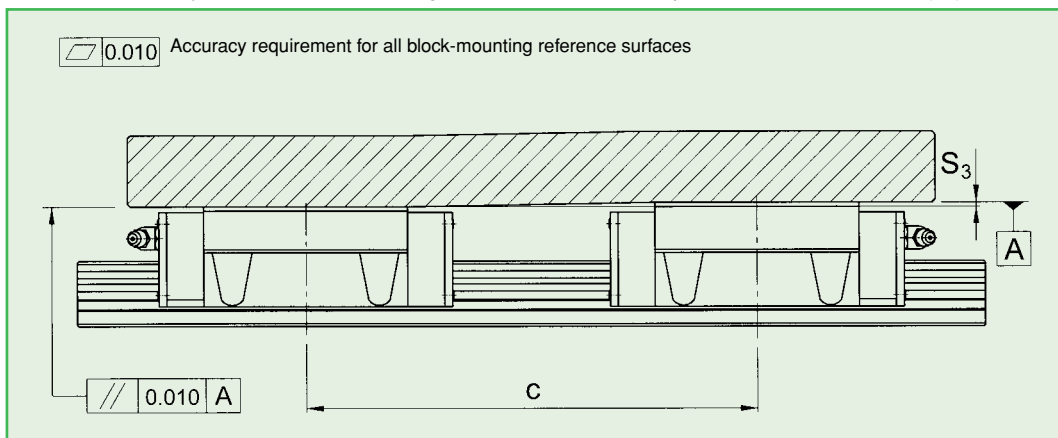


$$S_3 = c \times 4.2 \times 10^{-5} \text{ ..... Equal. 2.4}$$

$S_3$  : Max. tolerance of height  
 $c$  : distance between paired blocks

## 2-1-12 Cautions for Installation fillets

### (1) Shoulder heights and fillets

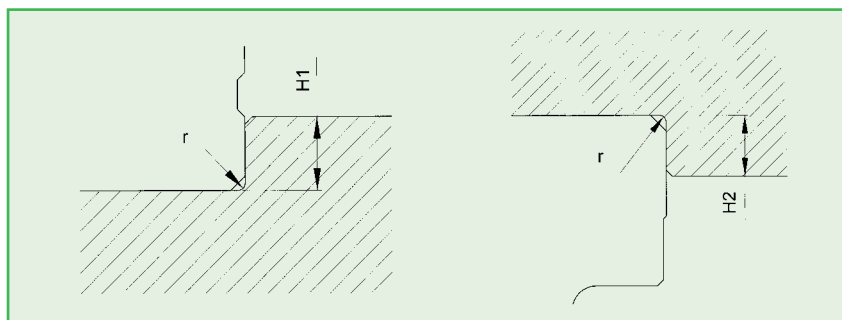

■ Table 2.25 Shoulder Heights and Fillets

| Size | Max. radius of fillets<br>r (mm) | Shoulder height of the rail<br>H1 (mm) | Shoulder height of the block<br>H2 (mm) |
|------|----------------------------------|----------------------------------------|-----------------------------------------|
| LG15 | 0.3                              | 3                                      | 4                                       |
| LG20 | 0.3                              | 4                                      | 5                                       |
| LG25 | 0.5                              | 5                                      | 5                                       |
| LG30 | 0.5                              | 5                                      | 5                                       |
| LG35 | 0.5                              | 6                                      | 6                                       |
| LG45 | 1                                | 8                                      | 6                                       |
| LG55 | 1.5                              | 10                                     | 10                                      |
| LG65 | 1.5                              | 10                                     | 10                                      |

## (2) Tightening torque of bolts for installation

The improper tightening of bolts will influence the accuracy of Linear Guideway seriously, so that the following tightening torque for different sizes of bolt is recommended.

■ Table 2.26 Torque

| Size  | Bolt size    | Torque<br>(kgf-cm) | Size  | Bolt size      | Torque<br>(kgf-cm) |
|-------|--------------|--------------------|-------|----------------|--------------------|
| LG 15 | M4x0.7Px16L  | 40                 | LG 35 | M8x1.25Px25L   | 310                |
| LG 20 | M5x0.8Px16L  | 90                 | LG 45 | M12x1.75Px35L  | 1,200              |
| LG 25 | M6x1Px20L    | 140                | LG 55 | M14 × 2P × 45L | 1,600              |
| LG 30 | M8x1.25Px25L | 310                | LG 65 | M16 × 2P × 50L | 2,000              |

## 2-1-13 Standard Length and Max. Length of Rail

**HIWIN** has offered the standard length of rails for customer needs. As for the non-standard E value, to avoid the unstable end part of rail, it is recommended the E value should not be over 1/2 of pitch (P). On the other hand, the E value should not be less than the Emin due to the break of mounting hole.

$$L = (n - 1) \times P + 2 \times E \quad \text{----- Equal. 2.5}$$

L : Total length of rail (mm)

n : Number of mounting holes

P : Distance between any two holes (mm)

E : Distance from the center of the last hole to the edge (mm)

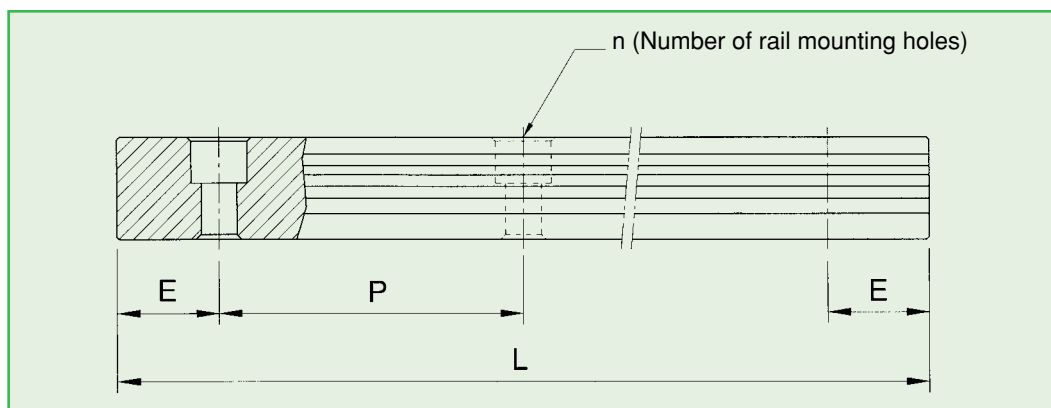





Table 2.27

| Item                                   | LG15     | LG20      | LG25      | LG30      | LG35      | LG45      | LG55      | LG65      |
|----------------------------------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Standard Length                        | 160(3)   | 220(4)    | 220(4)    | 280(4)    | 280(4)    | 570(6)    | 780(7)    | 1,270(9)  |
|                                        | 220(4)   | 280(5)    | 280(5)    | 440(6)    | 440(6)    | 885(9)    | 1,020(9)  | 1,570(11) |
|                                        | 280(5)   | 340(6)    | 340(6)    | 600(8)    | 600(8)    | 1,200(12) | 1,260(11) | 2,020(14) |
|                                        | 340(6)   | 460(8)    | 460(8)    | 760(10)   | 760(10)   | 1,620(16) | 1,500(13) | 2,620(18) |
|                                        | 460(8)   | 640(11)   | 640(11)   | 1,000(13) | 1,000(13) | 2,040(20) | 1,980(17) |           |
|                                        | 640(11)  | 820(14)   | 820(14)   | 1,640(21) | 1,640(21) | 2,460(24) | 2,580(22) |           |
|                                        | 820(14)  | 1,000(17) | 1,000(17) | 2,040(26) | 2,040(26) | 2,985(29) | 2,940(25) |           |
|                                        |          | 1,240(21) | 1,240(21) | 2,520(32) | 2,520(32) |           |           |           |
|                                        |          |           | 1,600(27) | 3,000(38) | 3,000(38) |           |           |           |
| Pitch(P)                               | 60       | 60        | 60        | 80        | 80        | 105       | 120       | 150       |
| Distance to End (E <sub>s</sub> )      | 20       | 20        | 20        | 20        | 20        | 22.5      | 30        | 35        |
| Min Distance to End(E <sub>min</sub> ) | 5        | 6         | 7         | 8         | 8         | 11        | 13        | 14        |
| Max. Standard Length                   | 1960(33) | 2980(50)  | 4,000(67) | 3,960(50) | 3,960(50) | 3,930(38) | 3,540(30) | 3,540(24) |
| Max. Length                            | 2000     | 3000      | 4,000     | 4000      | 4000      | 4000      | 3,550     | 3550      |

- Note:
1. Tolerance of E value for standard rail is 0.5~-0.5 mm. Tolerance of E value for butt-joint is 0~-0.3 mm.
  2. Maximum standard length means the max. rail length with standard E value on both side

## 2-1-14 Dimensions for HIWIN LG Series

### (1). LGH-CA / LGH-HA

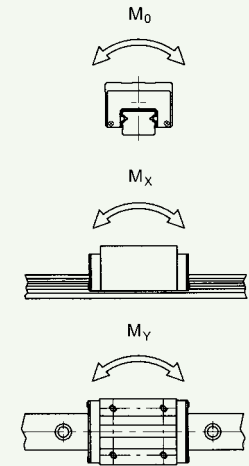
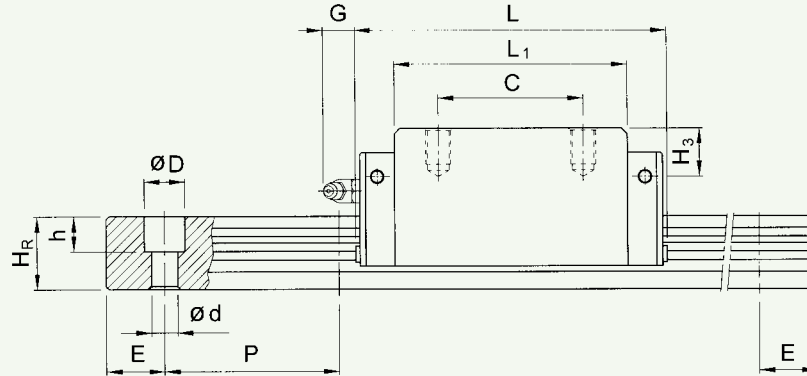
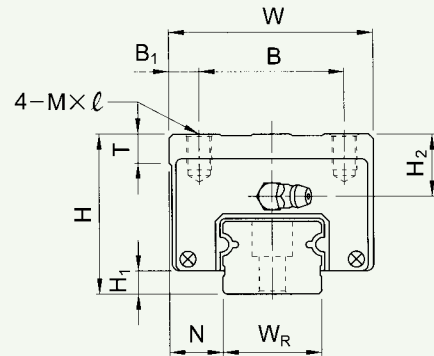


[Click model no. for download drawings .](#)

| Model No. | Dimensions of Assembly (mm) |                |      | Dimensions of Block (mm) |    |                |     |                |       |      |                  |    |                | Dimensions of Rail (mm) |                |     |     |     |     |      |                        | Mounting Bolt for Rail (mm) | Basic Dynamic Load Rating C (kgf) | Basic Static Load Rating C0 (kgf) | Static Rated Moment    |                        |                        | Weight      |             |
|-----------|-----------------------------|----------------|------|--------------------------|----|----------------|-----|----------------|-------|------|------------------|----|----------------|-------------------------|----------------|-----|-----|-----|-----|------|------------------------|-----------------------------|-----------------------------------|-----------------------------------|------------------------|------------------------|------------------------|-------------|-------------|
|           |                             |                |      |                          |    |                |     |                |       |      |                  |    |                |                         |                |     |     |     |     |      |                        |                             |                                   |                                   | M <sub>0</sub> (kgf·m) | M <sub>x</sub> (kgf·m) | M <sub>y</sub> (kgf·m) | Block (kg)  | Rail (kg/m) |
|           | H                           | H <sub>1</sub> | N    | W                        | B  | B <sub>1</sub> | C   | L <sub>1</sub> | L     | G    | M <sub>x</sub> ℓ | T  | H <sub>2</sub> | W <sub>R</sub>          | H <sub>R</sub> | D   | h   | d   | P   | E    | M <sub>0</sub> (kgf·m) |                             |                                   |                                   | M <sub>x</sub> (kgf·m) | M <sub>y</sub> (kgf·m) | Block (kg)             | Rail (kg/m) |             |
| LGH 15CA  | 28                          | 4.5            | 9.5  | 34                       | 26 | 4              | 26  | 39.6           | 60.6  | 5.3  | M4×5             | 6  | 8.5            | 15                      | 14             | 7.5 | 5.3 | 4.5 | 60  | 20   | M4×16                  | 1,040                       | 1,680                             | 13.5                              | 11.0                   | 11.0                   | 0.21                   | 1.47        |             |
| LGH 20CA  | 30                          | 5              | 12   | 44                       | 32 | 6              | 36  | 52.7           | 77.3  | 12   | M5×6             | 8  | 7.1            | 20                      | 15             | 9.5 | 8.5 | 6   | 60  | 20   | M5×16                  | 1,650                       | 2,670                             | 28.1                              | 22.8                   | 22.8                   | 0.37                   | 2.08        |             |
| LGH 20HA  |                             |                |      |                          |    |                | 50  | 67             | 91.6  |      | M5×6             | 8  | 7.1            | 20                      | 15             | 9.5 | 8.5 | 6   | 60  | 20   | M5×16                  | 2,100                       | 3,400                             | 35.7                              | 35.9                   | 35.9                   | 0.46                   |             |             |
| LGH 25CA  |                             |                |      |                          |    |                | 35  | 57.6           | 85.6  |      | M6×8             | 8  | 11.2           | 23                      | 20             | 11  | 9   | 7   | 60  | 20   | M6×20                  | 2,410                       | 3,880                             | 46.6                              | 37.2                   | 37.2                   | 0.59                   |             |             |
| LGH 25HA  | 40                          | 6.5            | 12.5 | 48                       | 35 | 6.5            | 50  | 76.6           | 104.6 | 12   | M6×8             | 8  | 11.2           | 23                      | 20             | 11  | 9   | 7   | 60  | 20   | M6×20                  | 3,210                       | 5,180                             | 62.2                              | 63.6                   | 63.6                   | 0.78                   | 3.15        |             |
| LGH 30CA  | 45                          | 7              | 16   | 60                       | 40 | 10             | 40  | 72             | 104.4 | 12   | M8×10            | 8  | 10.5           | 28                      | 23             | 14  | 12  | 9   | 80  | 20   | M8×25                  | 3,380                       | 5,460                             | 79.3                              | 61.2                   | 61.2                   | 1.04                   | 4.41        |             |
| LGH 30HA  |                             |                |      |                          |    |                | 60  | 93             | 125.4 |      | M8×10            | 8  | 10.5           | 28                      | 23             | 14  | 12  | 9   | 80  | 20   | M8×25                  | 4,400                       | 7,100                             | 103.0                             | 100.4                  | 100.4                  | 1.33                   |             |             |
| LGH 35CA  |                             |                |      |                          |    |                | 50  | 82             | 118.4 |      | M8×12            | 10 | 15             | 34                      | 25             | 14  | 12  | 9   | 80  | 20   | M8×25                  | 4,180                       | 6,740                             | 118.1                             | 84.4                   | 84.4                   | 1.72                   |             |             |
| LGH 35HA  | 55                          | 8              | 18   | 70                       | 50 | 10             | 72  | 105.8          | 142.2 | 12   | M8×12            | 10 | 15             | 34                      | 25             | 14  | 12  | 9   | 80  | 20   | M8×25                  | 5,430                       | 8,770                             | 153.5                             | 138.4                  | 138.4                  | 2.24                   | 5.93        |             |
| LGH 45CA  | 70                          | 10             | 20.5 | 86                       | 60 | 13             | 60  | 99.6           | 139.2 | 12.9 | M10×17           | 15 | 21             | 45                      | 32             | 20  | 17  | 14  | 105 | 22.5 | M12×35                 | 6,020                       | 9,710                             | 223.5                             | 141.3                  | 141.3                  | 3.16                   | 10.01       |             |
| LGH 45HA  |                             |                |      |                          |    |                | 80  | 133            | 172.6 |      | M12×18           | 17 | 22             | 53                      | 40             | 23  | 20  | 16  | 120 | 30   | M14×45                 | 8,430                       | 13,600                            | 312.8                             | 259.2                  | 259.2                  | 4.28                   |             |             |
| LGH 55CA  |                             |                |      |                          |    |                | 75  | 115.8          | 164.8 |      | M12×18           | 17 | 22             | 53                      | 40             | 23  | 20  | 16  | 120 | 30   | M14×45                 | 9,740                       | 13,220                            | 384.9                             | 280.9                  | 280.9                  | 5.30                   |             |             |
| LGH 55HA  | 80                          | 13             | 23.5 | 100                      | 75 | 12.5           | 95  | 154.7          | 203.7 | 12.9 | M12×18           | 17 | 22             | 53                      | 40             | 23  | 20  | 16  | 120 | 30   | M14×45                 | 11,810                      | 18,510                            | 489.8                             | 442.7                  | 442.7                  | 6.40                   | 14.82       |             |
| LGH 65CA  | 90                          | 19             | 31.5 | 126                      | 76 | 25             | 70  | 138.6          | 197.6 | 12.9 | M16×20           | 25 | 20             | 63                      | 48             | 26  | 22  | 18  | 150 | 35   | M16×50                 | 14,940                      | 20,990                            | 738.8                             | 579.0                  | 579.0                  | 7.30                   | 21.26       |             |
| LGH 65HA  |                             |                |      |                          |    |                | 120 | 187.6          | 246.6 |      | M16×20           | 25 | 20             | 63                      | 48             | 26  | 22  | 18  | 150 | 35   | M16×50                 | 18,290                      | 27,290                            | 1007.5                            | 1040.8                 | 1040.8                 | 9.30                   |             |             |

Above listed dimensions of rail are dimensions of LGR-R (Bolt hole, mounting from above), and dimensions of LGR-T (Tapped hole, mounting from below) refer to Page 37.

(2). LGW-CA / LGW-HA

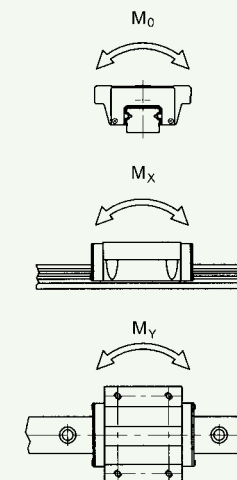
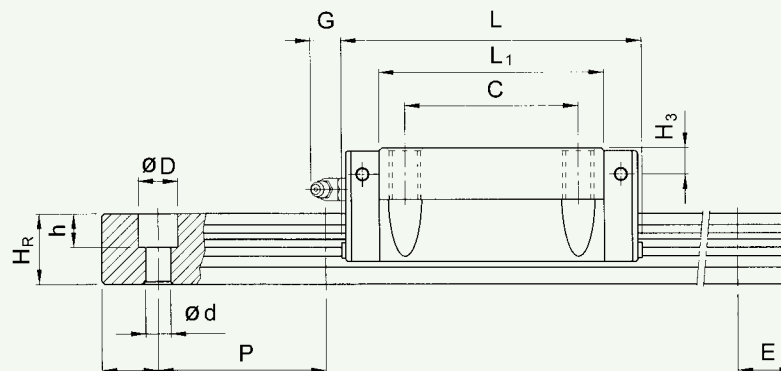
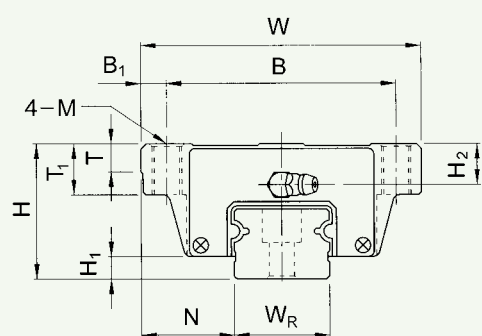


[Click model no. for download drawings .](#)

| Model No. | Dimensions of Assembly (mm) |                |      | Dimensions of Block (mm) |     |                |     |                |       |      |     |    |                |                |                |                | Dimensions of Rail (mm) |     |     |     |     |      |                        |                        | Mounting Bolt for Rail (mm) | Basic Dynamic Load Rating C (kgf) | Basic Static Load Rating C0 (kgf) | Static Rated Moment    |            |             | Weight |  |
|-----------|-----------------------------|----------------|------|--------------------------|-----|----------------|-----|----------------|-------|------|-----|----|----------------|----------------|----------------|----------------|-------------------------|-----|-----|-----|-----|------|------------------------|------------------------|-----------------------------|-----------------------------------|-----------------------------------|------------------------|------------|-------------|--------|--|
|           |                             |                |      |                          |     |                |     |                |       |      |     |    |                |                |                |                |                         |     |     |     |     |      |                        |                        |                             |                                   |                                   |                        |            |             |        |  |
|           | H                           | H <sub>1</sub> | N    | W                        | B   | B <sub>1</sub> | C   | L <sub>1</sub> | L     | G    | M   | T  | T <sub>1</sub> | H <sub>2</sub> | H <sub>3</sub> | W <sub>R</sub> | H <sub>R</sub>          | D   | h   | d   | P   | E    | M <sub>0</sub> (kgf·m) | M <sub>x</sub> (kgf·m) |                             |                                   |                                   | M <sub>y</sub> (kgf·m) | Block (kg) | Rail (kg/m) |        |  |
| LGW 15CA  | 24                          | 4.5            | 16   | 47                       | 38  | 4.5            | 30  | 39.6           | 60.6  | 5.3  | M5  | 6  | 9              | 4.5            | 3.6            | 15             | 14                      | 7.5 | 5.3 | 4.5 | 60  | 20   | M4x16                  | 1,040                  | 1,680                       | 13.5                              | 11.0                              | 11.0                   | 0.20       | 1.47        |        |  |
| LGW 20CA  | 30                          | 5              | 21.5 | 63                       | 53  | 5              | 40  | 52.7           | 77.3  | 12   | M6  | 8  | 10             | 8.4            | 7.1            | 20             | 15                      | 9.5 | 8.5 | 6   | 60  | 20   | M5x16                  | 1,650                  | 2,670                       | 28.1                              | 22.8                              | 22.8                   | 0.46       | 2.08        |        |  |
| LGW 20HA  |                             |                |      |                          |     |                |     | 67             | 91.6  |      |     |    |                |                |                |                |                         |     |     |     |     |      |                        | 2,100                  | 3,400                       | 35.7                              | 35.9                              | 35.9                   | 0.58       |             |        |  |
| LGW 25CA  | 36                          | 6.5            | 23.5 | 70                       | 57  | 6.5            | 45  | 57.6           | 85.6  | 12   | M8  | 8  | 14             | 8.8            | 7              | 23             | 20                      | 11  | 9   | 7   | 60  | 20   | M6x20                  | 2,410                  | 3,880                       | 46.6                              | 37.2                              | 37.2                   | 0.64       | 3.15        |        |  |
| LGW 25HA  |                             |                |      |                          |     |                |     | 76.6           | 104.6 |      |     |    |                |                |                |                |                         |     |     |     |     |      |                        | 3,210                  | 5,180                       | 62.2                              | 63.6                              | 63.6                   | 0.86       |             |        |  |
| LGW 30CA  | 42                          | 7              | 31   | 90                       | 72  | 9              | 52  | 72             | 104.4 | 12   | M10 | 8  | 16             | 11             | 7.5            | 28             | 23                      | 14  | 12  | 9   | 80  | 20   | M8x25                  | 3,380                  | 5,460                       | 79.3                              | 61.2                              | 61.2                   | 1.20       | 4.41        |        |  |
| LGW 30HA  |                             |                |      |                          |     |                |     | 93             | 125.5 |      |     |    |                |                |                |                |                         |     |     |     |     |      |                        | 4,400                  | 7,100                       | 103.0                             | 100.4                             | 100.4                  | 1.56       |             |        |  |
| LGW 35CA  | 48                          | 8              | 33   | 100                      | 82  | 9              | 62  | 82             | 118.4 | 12   | M10 | 10 | 18             | 14.4           | 9              | 34             | 25                      | 14  | 12  | 9   | 80  | 20   | M8x25                  | 4,180                  | 6,740                       | 118.1                             | 84.4                              | 84.4                   | 1.78       | 5.93        |        |  |
| LGW 35HA  |                             |                |      |                          |     |                |     | 105.8          | 142.2 |      |     |    |                |                |                |                |                         |     |     |     |     |      |                        | 5,430                  | 8,770                       | 153.5                             | 138.4                             | 138.4                  | 2.34       |             |        |  |
| LGW 45CA  | 60                          | 10             | 37.5 | 120                      | 100 | 10             | 80  | 99.6           | 139.2 | 12.9 | M12 | 15 | 22             | 18.2           | 11             | 45             | 32                      | 20  | 17  | 14  | 105 | 22.5 | M12x35                 | 6,020                  | 9,710                       | 223.5                             | 141.3                             | 141.3                  | 3.13       | 10.01       |        |  |
| LGW 45HA  |                             |                |      |                          |     |                |     | 133            | 172.6 |      |     |    |                |                |                |                |                         |     |     |     |     |      |                        | 8,430                  | 13,600                      | 312.8                             | 259.2                             | 259.2                  | 4.27       |             |        |  |
| LGW 55CA  | 70                          | 13             | 43.5 | 140                      | 116 | 12             | 95  | 115.8          | 164.8 | 12.9 | M14 | 17 | 26             | 12             | 12             | 53             | 40                      | 23  | 20  | 16  | 120 | 30   | M14x45                 | 9,740                  | 13,220                      | 384.9                             | 280.9                             | 280.9                  | 5.50       | 14.82       |        |  |
| LGW 55HA  |                             |                |      |                          |     |                |     | 154.7          | 203.7 |      |     |    |                |                |                |                |                         |     |     |     |     |      |                        | 11,810                 | 18,510                      | 489.8                             | 442.7                             | 442.7                  | 6.70       |             |        |  |
| LGW 65CA  | 90                          | 19             | 53.5 | 170                      | 142 | 14             | 110 | 138.6          | 197.6 | 12.9 | M16 | 23 | 37             | 20             | 20             | 63             | 48                      | 26  | 22  | 18  | 150 | 35   | M16x50                 | 14,940                 | 20,990                      | 738.8                             | 579.0                             | 579.0                  | 8.50       | 21.26       |        |  |
| LGW 65HA  |                             |                |      |                          |     |                |     | 187.6          | 246.6 |      |     |    |                |                |                |                |                         |     |     |     |     |      |                        | 18,290                 | 27,290                      | 1007.5                            | 1040.8                            | 1040.8                 | 10.70      |             |        |  |

Above listed dimensions of rail are dimensions of LGR-R (Bolt hole, mounting from above), and dimensions of LGR-T (Tapped hole, mounting from below) refer to Page 37.

### (3). LGW-CB / LGW-HB

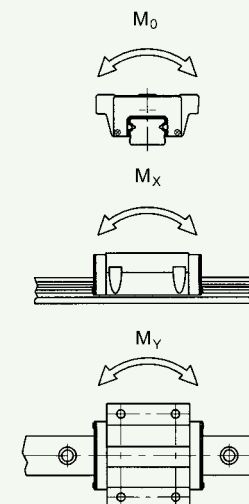
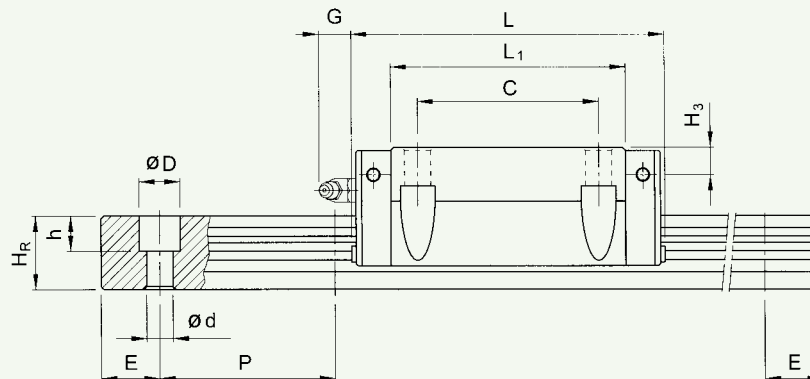
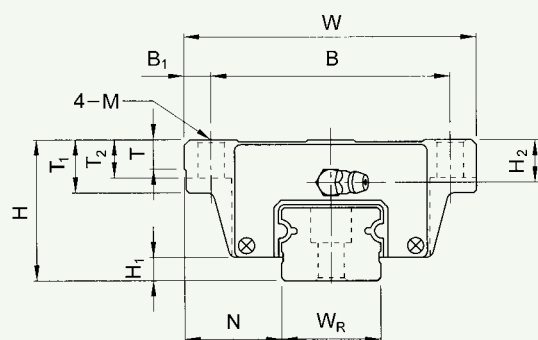


[Click model no. for download drawings .](#)

| Model No. | Dimensions of Assembly (mm) |                |      | Dimensions of Block (mm) |     |                |     |                |       |      |      |    |                |                |                |                | Dimensions of Rail (mm) |                |     |     |     |     |      | Mounting Bolt for Rail (mm) | Basic Dynamic Load Rating C (kgf) | Basic Static Load Rating C0 (kgf) | Static Rated Moment    |                        |                        | Weight     |             |
|-----------|-----------------------------|----------------|------|--------------------------|-----|----------------|-----|----------------|-------|------|------|----|----------------|----------------|----------------|----------------|-------------------------|----------------|-----|-----|-----|-----|------|-----------------------------|-----------------------------------|-----------------------------------|------------------------|------------------------|------------------------|------------|-------------|
|           |                             |                |      |                          |     |                |     |                |       |      |      |    |                |                |                |                |                         |                |     |     |     |     |      |                             |                                   |                                   | M <sub>0</sub> (kgf-m) | M <sub>x</sub> (kgf-m) | M <sub>y</sub> (kgf-m) | Block (kg) | Rail (kg/m) |
|           | H                           | H <sub>i</sub> | N    | W                        | B   | B <sub>1</sub> | C   | L <sub>1</sub> | L     | G    | M    | T  | T <sub>1</sub> | T <sub>2</sub> | H <sub>2</sub> | H <sub>3</sub> | W <sub>R</sub>          | H <sub>R</sub> | D   | h   | d   | P   | E    |                             |                                   |                                   | M <sub>0</sub> —       |                        |                        |            |             |
| LGW 15CB  | 24                          | 4.5            | 16   | 47                       | 38  | 4.5            | 30  | 39.6           | 60.6  | 5.3  | ø4.5 | 6  | 9              | 7              | 4.5            | 3.6            | 15                      | 14             | 7.5 | 5.3 | 4.5 | 60  | 20   | M4x—16                      | 1,040                             | 1,680                             | 13.5                   | 11.0                   | 11.0                   | 0.20       | 1.47        |
| LGW 20CB  | 30                          | 5              | 21.5 | 63                       | 53  | 5              | 40  | 52.7           | 77.3  | 12   | ø6   | 8  | 10             | 10             | 8.4            | 7.1            | 20                      | 15             | 9.5 | 8.5 | 6   | 60  | 20   | M5x—16                      | 1,650                             | 2,670                             | 28.1                   | 22.8                   | 22.8                   | 0.46       | 2.08        |
| LGW 20HB  |                             |                |      |                          |     |                |     | 67             | 91.6  |      |      |    |                |                |                |                |                         |                |     |     |     |     |      |                             | 2,100                             | 3,400                             | 35.7                   | 35.9                   | 35.9                   | 0.58       |             |
| LGW 25CB  | 36                          | 6.5            | 23.5 | 70                       | 57  | 6.5            | 45  | 57.6           | 85.6  | 12   | ø7   | 8  | 14             | 10             | 8.8            | 7              | 23                      | 20             | 11  | 9   | 7   | 60  | 20   | M6x—20                      | 2,410                             | 3,880                             | 46.6                   | 37.2                   | 37.2                   | 0.64       | 3.15        |
| LGW 25HB  |                             |                |      |                          |     |                |     | 76.6           | 104.6 |      |      |    |                |                |                |                |                         |                |     |     |     |     |      |                             | 3,210                             | 5,180                             | 62.2                   | 63.6                   | 63.6                   | 0.86       |             |
| LGW 30CB  | 42                          | 7              | 31   | 90                       | 72  | 9              | 52  | 72             | 104.4 | 12   | ø9   | 8  | 16             | 10             | 11             | 7.5            | 28                      | 23             | 14  | 12  | 9   | 80  | 20   | M8x—25                      | 3,380                             | 5,460                             | 79.3                   | 61.2                   | 61.2                   | 1.20       | 4.41        |
| LGW 30HB  |                             |                |      |                          |     |                |     | 93             | 125.5 |      |      |    |                |                |                |                |                         |                |     |     |     |     |      |                             | 4,400                             | 7,100                             | 103.0                  | 100.4                  | 100.4                  | 1.56       |             |
| LGW 35CB  | 48                          | 8              | 33   | 100                      | 82  | 9              | 62  | 82             | 118.4 | 12   | ø9   | 10 | 18             | 13             | 14.4           | 9              | 34                      | 25             | 14  | 12  | 9   | 80  | 20   | M8x—25                      | 4,180                             | 6,740                             | 118.1                  | 84.4                   | 84.4                   | 1.78       | 5.93        |
| LGW 35HB  |                             |                |      |                          |     |                |     | 105.8          | 142.2 |      |      |    |                |                |                |                |                         |                |     |     |     |     |      |                             | 5,430                             | 8,770                             | 153.5                  | 138.4                  | 138.4                  | 2.34       |             |
| LGW 45CB  | 60                          | 10             | 37.5 | 120                      | 100 | 10             | 80  | 99.6           | 139.2 | 12.9 | ø11  | 15 | 22             | 15             | 18.2           | 11             | 45                      | 32             | 20  | 17  | 14  | 105 | 22.5 | M12x—35                     | 6,020                             | 9,710                             | 223.5                  | 141.3                  | 141.3                  | 3.13       | 10.01       |
| LGW 45HB  |                             |                |      |                          |     |                |     | 133            | 172.6 |      |      |    |                |                |                |                |                         |                |     |     |     |     |      |                             | 8,430                             | 13,600                            | 312.8                  | 259.2                  | 259.2                  | 4.27       |             |
| LGW 55CB  | 70                          | 13             | 43.5 | 140                      | 116 | 12             | 95  | 115.8          | 164.8 | 12.9 | ø14  | 17 | 26             | 17             | 12             | 12             | 53                      | 40             | 23  | 20  | 16  | 120 | 30   | M14x—45                     | 9,740                             | 13,220                            | 384.9                  | 280.9                  | 280.9                  | 5.50       | 14.82       |
| LGW 55HB  |                             |                |      |                          |     |                |     | 154.7          | 203.7 |      |      |    |                |                |                |                |                         |                |     |     |     |     |      |                             | 11,810                            | 18,510                            | 489.8                  | 442.7                  | 442.7                  | 6.70       |             |
| LGW 65CB  | 90                          | 19             | 53.5 | 170                      | 142 | 14             | 110 | 138.6          | 197.6 | 12.9 | ø16  | 23 | 37             | 23             | 20             | 20             | 63                      | 48             | 26  | 22  | 18  | 150 | 35   | M16x—50                     | 14,940                            | 20,990                            | 738.8                  | 579.0                  | 579.0                  | 8.50       | 21.26       |
| LGW 65HB  |                             |                |      |                          |     |                |     | 187.6          | 246.6 |      |      |    |                |                |                |                |                         |                |     |     |     |     |      |                             | 18,290                            | 27,290                            | 1007.5                 | 1040.8                 | 1040.8                 | 10.70      |             |

Above listed dimensions of rail are dimensions of LGR-R (Bolt hole, mounting from above), and dimensions of LGR-T (Tapped hole, mounting from below) refer to Page 37.

(4). LGW-CC / LGW-HC

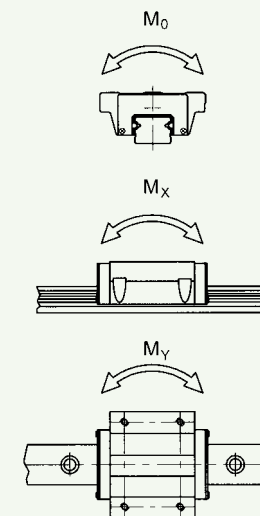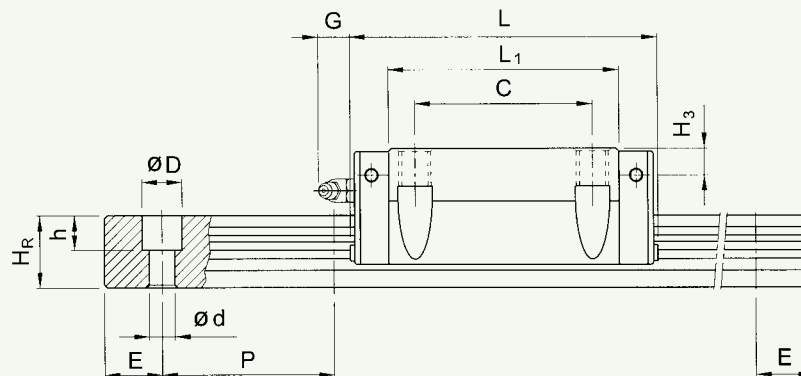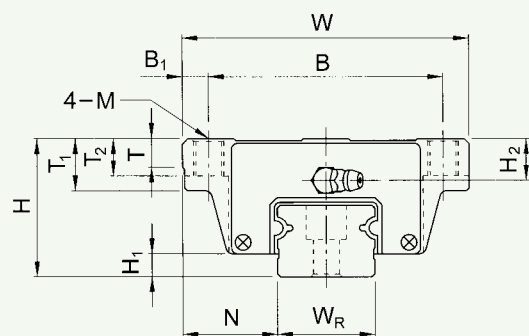


[Click model no. for download drawings .](#)

| Model No. | Dimensions of Assembly (mm) |     |      | Dimensions of Block (mm) |     |     |     |       |       |      |     |    |    |    |      |     | Dimensions of Rail (mm) |    |     |     |     |     |      | Mounting Bolt for Rail (mm) | Basic Dynamic Load Rating C (kgf) | Basic Static Load Rating C0 (kgf) | Static Rated Moment |            |            | Weight     |             |
|-----------|-----------------------------|-----|------|--------------------------|-----|-----|-----|-------|-------|------|-----|----|----|----|------|-----|-------------------------|----|-----|-----|-----|-----|------|-----------------------------|-----------------------------------|-----------------------------------|---------------------|------------|------------|------------|-------------|
|           | H                           | H1  | N    | W                        | B   | B1  | C   | L1    | L     | G    | M   | T  | T1 | T2 | H2   | H3  | WR                      | HR | D   | h   | d   | P   | E    |                             |                                   |                                   | Mo (kgf-m)          | Mx (kgf-m) | My (kgf-m) | Block (kg) | Rail (kg/m) |
| LGW 15CC  | 24                          | 4.5 | 16   | 47                       | 38  | 4.5 | 30  | 39.6  | 60.6  | 5.3  | M5  | 6  | 9  | 7  | 4.5  | 3.6 | 15                      | 14 | 7.5 | 5.3 | 4.5 | 60  | 20   | M4x16                       | 1,040                             | 1,680                             | 13.5                | 11.0       | 11.0       | 0.20       | 1.47        |
| LGW 25CC  | 36                          | 6.5 | 23.5 | 70                       | 57  | 6.5 | 45  | 57.6  | 85.6  | 12   | M8  | 8  | 14 | 10 | 8.8  | 7   | 23                      | 20 | 11  | 9   | 7   | 60  | 20   | M6x20                       | 2,410                             | 3,880                             | 46.6                | 37.2       | 37.2       | 0.64       | 3.15        |
| LGW 25HC  | 36                          | 6.5 | 23.5 | 70                       | 57  | 6.5 | 45  | 76.6  | 104.6 | 12   | M8  | 8  | 14 | 10 | 8.8  | 7   | 23                      | 20 | 11  | 9   | 7   | 60  | 20   | M6x20                       | 3,210                             | 5,180                             | 62.2                | 63.6       | 63.6       | 0.86       | 3.15        |
| LGW 30CC  | 42                          | 7   | 31   | 90                       | 72  | 9   | 52  | 72    | 104.4 | 12   | M10 | 8  | 16 | 10 | 11   | 7.5 | 28                      | 23 | 14  | 12  | 9   | 80  | 20   | M8x25                       | 3,380                             | 5,460                             | 79.3                | 61.2       | 61.2       | 1.20       | 4.41        |
| LGW 30HC  | 42                          | 7   | 31   | 90                       | 72  | 9   | 52  | 93    | 125.5 | 12   | M10 | 8  | 16 | 10 | 11   | 7.5 | 28                      | 23 | 14  | 12  | 9   | 80  | 20   | M8x25                       | 4,400                             | 7,100                             | 103.0               | 100.4      | 100.4      | 1.56       | 4.41        |
| LGW 35CC  | 48                          | 8   | 33   | 100                      | 82  | 9   | 62  | 82    | 118.4 | 12   | M10 | 10 | 18 | 13 | 14.4 | 9   | 34                      | 25 | 14  | 12  | 9   | 80  | 20   | M8x25                       | 4,180                             | 6,740                             | 118.1               | 84.4       | 84.4       | 1.78       | 5.93        |
| LGW 35HC  | 48                          | 8   | 33   | 100                      | 82  | 9   | 62  | 105.8 | 142.2 | 12   | M10 | 10 | 18 | 13 | 14.4 | 9   | 34                      | 25 | 14  | 12  | 9   | 80  | 20   | M8x25                       | 5,430                             | 8,770                             | 153.5               | 138.4      | 138.4      | 2.34       | 5.93        |
| LGW 45CC  | 60                          | 10  | 37.5 | 120                      | 100 | 10  | 80  | 99.6  | 139.2 | 12.9 | M12 | 15 | 22 | 15 | 18.2 | 11  | 45                      | 32 | 20  | 17  | 14  | 105 | 22.5 | M12x35                      | 6,020                             | 9,710                             | 223.5               | 141.3      | 141.3      | 3.13       | 10.01       |
| LGW 45HC  | 60                          | 10  | 37.5 | 120                      | 100 | 10  | 80  | 115.8 | 164.8 | 12.9 | M12 | 15 | 22 | 15 | 18.2 | 11  | 45                      | 32 | 20  | 17  | 14  | 105 | 22.5 | M12x35                      | 8,430                             | 13,600                            | 312.8               | 259.2      | 259.2      | 4.27       | 10.01       |
| LGW 55CC  | 70                          | 13  | 43.5 | 140                      | 116 | 12  | 95  | 133   | 172.6 | 12.9 | M14 | 17 | 26 | 18 | 12   | 12  | 53                      | 40 | 23  | 20  | 16  | 120 | 30   | M14x45                      | 9,740                             | 13,220                            | 384.9               | 280.9      | 280.9      | 5.50       | 14.82       |
| LGW 55HC  | 70                          | 13  | 43.5 | 140                      | 116 | 12  | 95  | 154.7 | 203.7 | 12.9 | M14 | 17 | 26 | 18 | 12   | 12  | 53                      | 40 | 23  | 20  | 16  | 120 | 30   | M14x45                      | 11,810                            | 18,510                            | 489.8               | 442.7      | 442.7      | 6.70       | 14.82       |
| LGW 65CC  | 90                          | 19  | 53.5 | 170                      | 142 | 14  | 110 | 138.6 | 197.6 | 12.9 | M16 | 23 | 37 | 23 | 20   | 20  | 63                      | 48 | 26  | 22  | 18  | 150 | 35   | M16x50                      | 14,940                            | 20,990                            | 738.8               | 579.0      | 579.0      | 8.50       | 21.26       |
| LGW 65HC  | 90                          | 19  | 53.5 | 170                      | 142 | 14  | 110 | 187.6 | 246.6 | 12.9 | M16 | 23 | 37 | 23 | 20   | 20  | 63                      | 48 | 26  | 22  | 18  | 150 | 35   | M16x50                      | 18,290                            | 27,290                            | 1007.5              | 1040.8     | 1040.8     | 10.70      | 21.26       |

Above listed dimensions of rail are dimensions of LGR-R (Bolt hole, mounting from above), and dimensions of LGR-T (Tapped hole, mounting from below) refer to Page 37.

(5). Dimensions for LGR-T (Rail Mounting from Below)
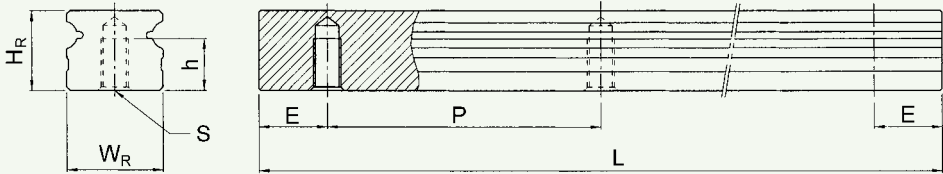
|  |                         |                |           |     |     |      |               |
|------------------------------------------------------------------------------------|-------------------------|----------------|-----------|-----|-----|------|---------------|
| Model No.                                                                          | Dimensions of Rail (mm) |                |           |     |     |      | Weight (kg/m) |
|                                                                                    | W <sub>R</sub>          | H <sub>R</sub> | S         | h   | P   | E    |               |
| LGR15T                                                                             | 15                      | 14             | M5x0.8P   | 7.5 | 60  | 20   | 1.59          |
| LGR20T                                                                             | 20                      | 15             | M6x1P     | 8   | 60  | 20   | 2.26          |
| LGR25T                                                                             | 23                      | 20             | M6x1P     | 12  | 60  | 20   | 3.41          |
| LGR30T                                                                             | 28                      | 23             | M8x1.25P  | 15  | 80  | 20   | 4.76          |
| LGR35T                                                                             | 34                      | 25             | M8x1.25P  | 16  | 80  | 20   | 6.31          |
| LGR45T                                                                             | 45                      | 32             | M12x1.75P | 20  | 105 | 22.5 | 10.70         |
| LGR55T                                                                             | 53                      | 40             | M14x2P    | 24  | 120 | 30   | 15.52         |
| LGR65T                                                                             | 63                      | 48             | M20x2.5P  | 30  | 150 | 35   | 21.82         |




## 2-2 AG Series

### 2-2-1 Features of the AG Series Linear Guideway

Because of enlarged balls and Gothic contact design, AG series is possessed with high stiffness, accuracy, and loading capacity. Besides these characteristics, the lower assembly height and the shorter length make the AG series more suitable for the high-speed automatic machines and the applications where space limit is considered.


Moreover, the optimum design of circulating system makes the AG series moving smoothly and quietly even under the high-speed condition.

### 2-2-2. Construction of AG Series

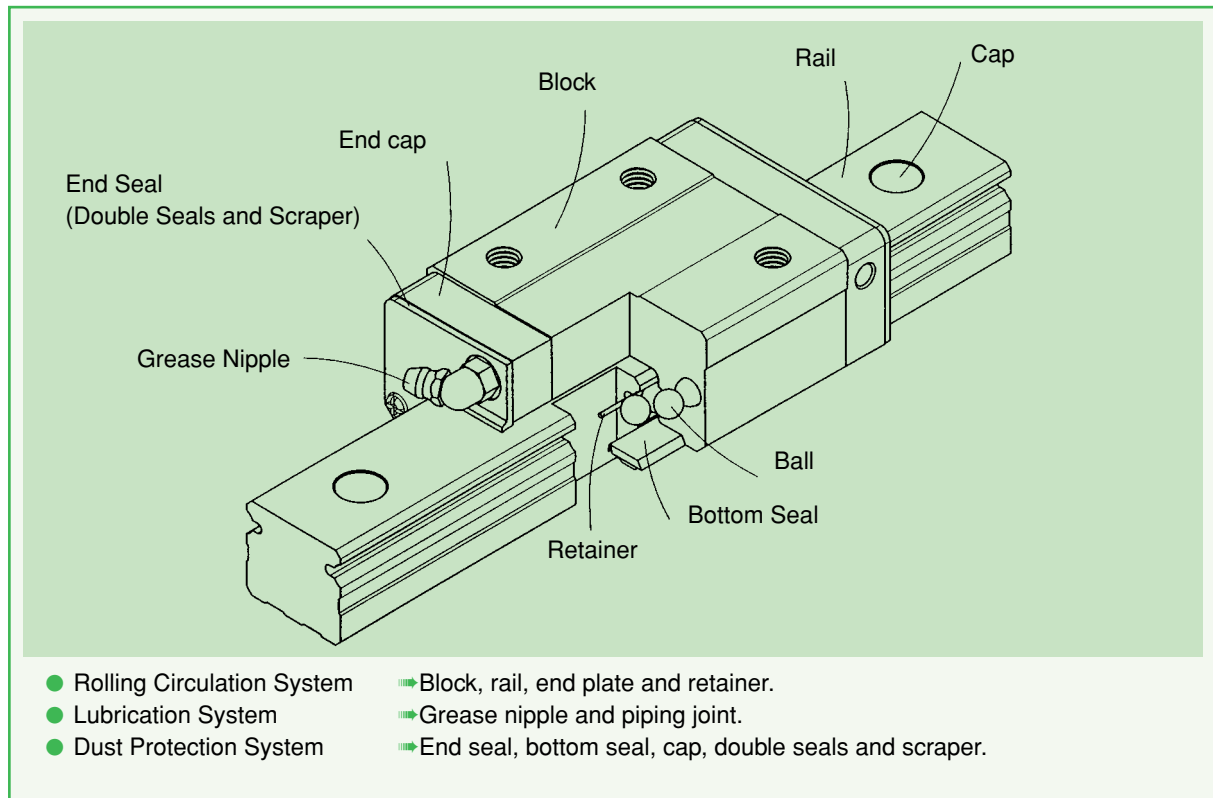

### 2-2-3. Model Number of AG Series


AG series guideway can be classified into non-interchangeable and interchangeable types. The size of two types is same as each other. The main difference between two types is that the interchangeable type of blocks and rails can be freely exchanged, and their accuracy can reach up to P class. Because of the restrictedly dimensional control, the interchangeable type linear guideway is a smart choice for customer when rails don't need to be paired for an axis. The model number of AG series contains the size, type, accuracy class, preload class, etc..

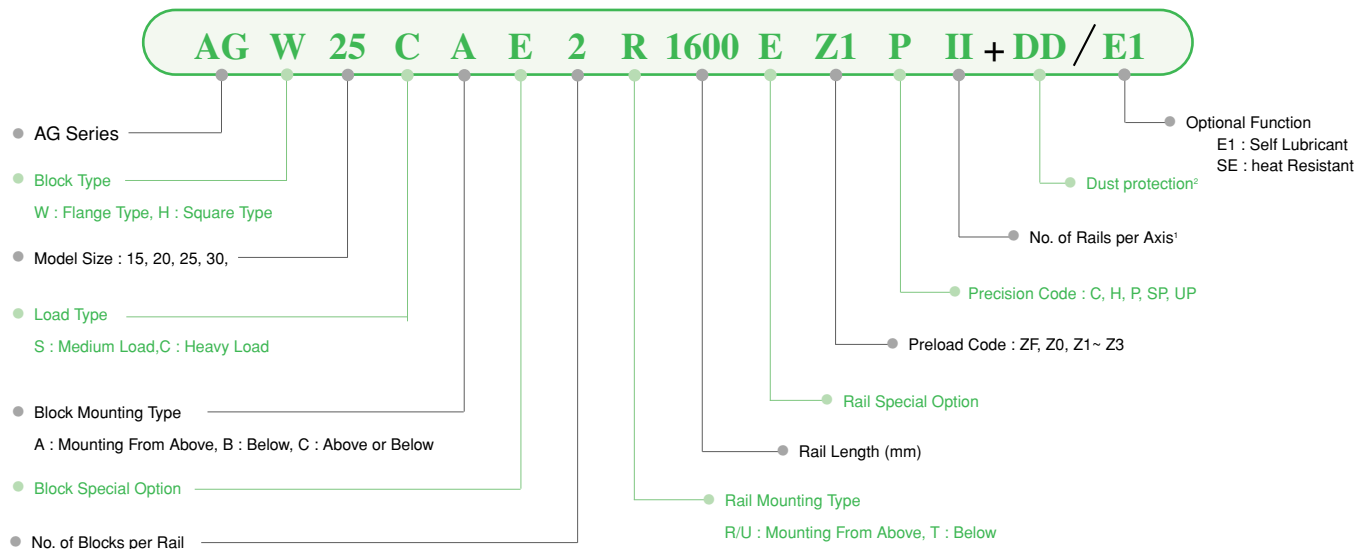**(1) Non-interchangeable type**


- Note:**
1. The Roman numerals used to express the number of rails used in one axis. As for the single rail in an axis, it shows no symbol.
  2. For dust protection, it is no symbol if it is standard(end seal and bottom seal).  
 ZZ : End seal, bottom seal and scraper  
 KK: Double seals, bottom seal and scraper.  
 DD: Double seals and bottom seal

**(2) Interchangeable type**

## ◆ Model Number of LG Block

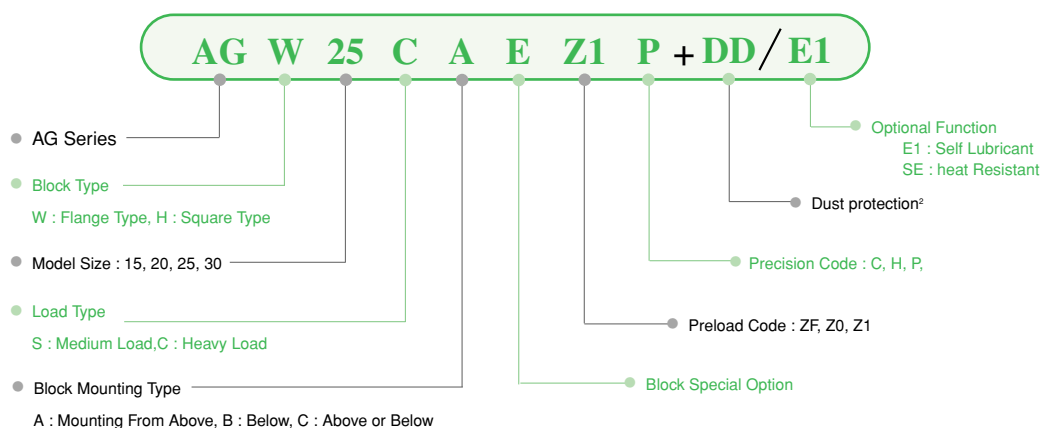

## ◆ Model Number of LG Rail



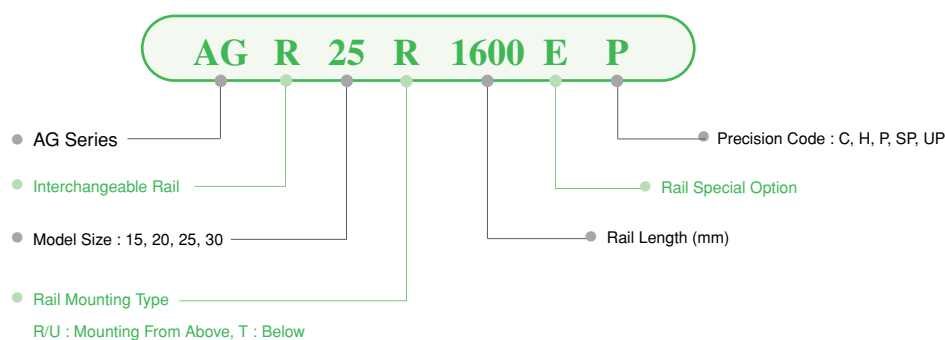


## 2-2-4. Types

### (1) Block types

HIWIN offers flange and square two types of linear guideway. Because of the characteristics of low assembly height and larger mounting surface, it is especially good for the moment loading application



Table 2.28 Block Types
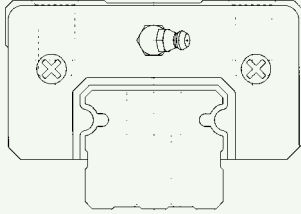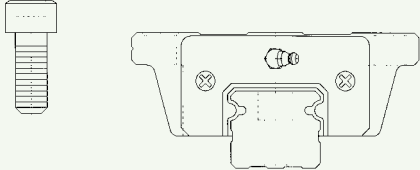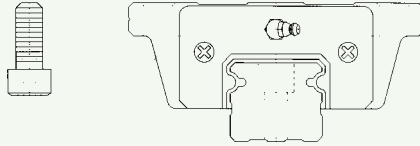
| Type   | Model            | Shape                                                                               | Height<br>(mm) | Rail Length<br>(mm) | Main Application                                                                                                                                          |
|--------|------------------|-------------------------------------------------------------------------------------|----------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Square | AGH-SA<br>AGH-CA |    | 24             | 100                 | 1. Automatic device<br>2. High speed transportation equipment<br>3. Precious measuring equipment<br>4. Semiconductor equipment<br>5. Wood cutting machine |
|        |                  |                                                                                     | ↓<br>42        | ↓<br>4000           |                                                                                                                                                           |
| Flange | AGW-SA<br>AGW-CA |    | 24             | 100                 |                                                                                                                                                           |
|        |                  |                                                                                     | ↓<br>42        | ↓<br>4000           |                                                                                                                                                           |
|        | AGW-SB<br>AGW-CB |  | 24             | 100                 |                                                                                                                                                           |
|        |                  |                                                                                     | ↓<br>42        | ↓<br>4000           |                                                                                                                                                           |

### (2) Rail types

Besides the standard top-mounting type, HIWIN also offers the bottom-mounting type of rails to customers.

Table 2.29 Rail Types
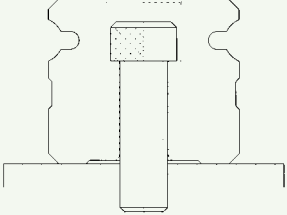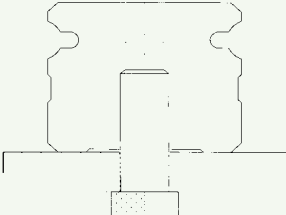
| Mounting from Above(R or U Type)                                                    | Mounting from below(T Type)                                                          |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |

## 2-2-5 Accuracy Classes

The accuracy of AG series can be classified into normal(C), high(H), precision(P), super precision(SP), ultra precision (UP), five classes. Choosing the class by referencing the accuracy of applied equipment.

### (1) Accuracy of non-interchangeable AG

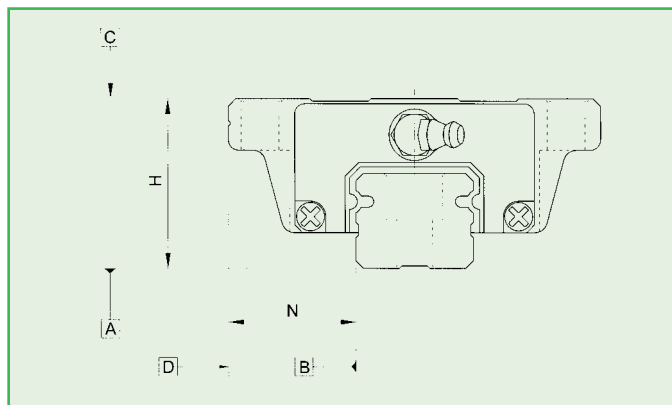


Table 2.30 Accuracy Standards

| Unit mm                                             |                                    | AG - 15, 20    |             |                  |                         |                         |
|-----------------------------------------------------|------------------------------------|----------------|-------------|------------------|-------------------------|-------------------------|
| Item                                                |                                    | Normal<br>(C)  | High<br>(H) | Precision<br>(P) | Super Precision<br>(SP) | Ultra Precision<br>(UP) |
| Dimension tolerance of height H                     |                                    | ± 0.1          | ± 0.03      | 0<br>- 0.03      | 0<br>- 0.015            | 0<br>- 0.008            |
| Dimension tolerance of width N                      |                                    | ± 0.1          | ± 0.03      | 0<br>- 0.03      | 0<br>- 0.015            | 0<br>- 0.008            |
| Pair                                                | Variation of height H              | 0.02           | 0.01        | 0.006            | 0.004                   | 0.003                   |
|                                                     | Variation of width N (Master Rail) | 0.02           | 0.01        | 0.006            | 0.004                   | 0.003                   |
| Preload classes                                     |                                    | ZF, Z0, Z1     | Z0 ~ Z3     |                  |                         |                         |
| Running parallelism of block surface C to surface A |                                    | See Table 2.34 |             |                  |                         |                         |
| Running parallelism of block surface D to surface B |                                    | See Table 2.34 |             |                  |                         |                         |

Table 2.31 Accuracy Standards

| Unit mm                                             |                                    | AG - 25, 30,   |             |                  |                         |                         |
|-----------------------------------------------------|------------------------------------|----------------|-------------|------------------|-------------------------|-------------------------|
| Item                                                |                                    | Normal<br>(C)  | High<br>(H) | Precision<br>(P) | Super Precision<br>(SP) | Ultra Precision<br>(UP) |
| Dimension tolerance of height H                     |                                    | ± 0.1          | ± 0.04      | 0<br>- 0.04      | 0<br>- 0.02             | 0<br>- 0.01             |
| Dimension tolerance of width N                      |                                    | ± 0.1          | ± 0.04      | 0<br>- 0.04      | 0<br>- 0.02             | 0<br>- 0.01             |
| Pair                                                | Variation of height H              | 0.02           | 0.015       | 0.007            | 0.005                   | 0.003                   |
|                                                     | Variation of width N (Master Rail) | 0.03           | 0.015       | 0.007            | 0.005                   | 0.003                   |
| Preload classes                                     |                                    | ZF, Z0, Z1     | Z0 ~ Z3     |                  |                         |                         |
| Running parallelism of block surface C to surface A |                                    | See Table 2.34 |             |                  |                         |                         |
| Running parallelism of block surface D to surface B |                                    | See Table 2.34 |             |                  |                         |                         |

## (2) Accuracy of interchangeable AG

Table 2.32 Accuracy Standards

| Unit mm                                             |                       | AG - 15, 20    |             |                  |
|-----------------------------------------------------|-----------------------|----------------|-------------|------------------|
| Item                                                |                       | Normal<br>(C)  | High<br>(H) | Precision<br>(P) |
| Dimension tolerance of height H                     |                       | ± 0.1          | ± 0.03      | ± 0.015          |
| Dimension tolerance of width N                      |                       | ± 0.1          | ± 0.03      | ± 0.015          |
| Pair                                                | Variation of height H | 0.02           | 0.01        | 0.006            |
|                                                     | Variation of width N  | 0.02           | 0.01        | 0.006            |
| Pair variation of height H (multi sets)             |                       | 0.06           | 0.04        | 0.026            |
| Preload classes                                     |                       | ZF, Z0, Z1     | Z0, Z1      |                  |
| Running parallelism of block surface C to surface A |                       | See Table 2.34 |             |                  |
| Running parallelism of block surface D to surface B |                       | See Table 2.34 |             |                  |

Table 2.33 Accuracy Standards

| Unit mm                                             |                       | AG - 25, 30    |             |                  |
|-----------------------------------------------------|-----------------------|----------------|-------------|------------------|
| Item                                                |                       | Normal<br>(C)  | High<br>(H) | Precision<br>(P) |
| Dimension tolerance of height H                     |                       | ± 0.1          | ± 0.04      | ± 0.02           |
| Dimension tolerance of width N                      |                       | ± 0.1          | ± 0.04      | ± 0.02           |
| Pair                                                | Variation of height H | 0.02           | 0.015       | 0.007            |
|                                                     | Variation of width N  | 0.03           | 0.015       | 0.007            |
| Pair variation of height H (multi sets)             |                       | 0.06           | 0.045       | 0.027            |
| Preload classes                                     |                       | ZF, Z0, Z1     | Z0, Z1      |                  |
| Running parallelism of block surface C to surface A |                       | See Table 2.34 |             |                  |
| Running parallelism of block surface D to surface B |                       | See Table 2.34 |             |                  |

## (3) Accuracy of Running Parallelism

Table 2.34 Accuracy of Running Parallelism

| Rail Length (mm) | Accuracy (μm) |    |    |    |    |
|------------------|---------------|----|----|----|----|
|                  | C             | H  | P  | SP | UP |
| 100 以下           | 12            | 7  | 3  | 2  | 2  |
| 100 ~ 200        | 14            | 9  | 4  | 2  | 2  |
| 200 ~ 300        | 15            | 10 | 5  | 3  | 2  |
| 300 ~ 500        | 17            | 12 | 6  | 3  | 2  |
| 500 ~ 700        | 20            | 13 | 7  | 4  | 2  |
| 700 ~ 900        | 22            | 15 | 8  | 5  | 3  |
| 900 ~ 1,100      | 24            | 16 | 9  | 6  | 3  |
| 1,100 ~ 1,500    | 26            | 18 | 11 | 7  | 4  |
| 1,500 ~ 1,900    | 28            | 20 | 13 | 8  | 4  |
| 1,900 ~ 2,500    | 31            | 22 | 15 | 10 | 5  |
| 2,500 ~ 3,100    | 33            | 25 | 18 | 11 | 6  |
| 3,100 ~ 3,600    | 36            | 27 | 20 | 14 | 7  |
| 3,600 ~ 4,000    | 37            | 28 | 21 | 15 | 7  |

### 2-2-6 Preload

AG series provides five standard preloads for various applications. Although increasing the preload is a good way to get higher stiffness, for avoiding the reduction of service life, we suggest the preload of AG 15,20 should not over medium class.

■ Table 2.35 Preload Classes

| Class              | Code | Preload            | Accuracy |
|--------------------|------|--------------------|----------|
| Light Clearance    | ZF   | Clearance 4~10 μ m | C        |
| Very Light Preload | Z0   | 0                  | C~UP     |
| Light Preload      | Z1   | 0.02C              | C~UP     |
| Medium Preload     | Z2   | 0.05C              | H~UP     |
| Heavy Preload      | Z3   | 0.07C              | H~UP     |

NOTE : The C in preload column means basic dynamic load rating.

### 2-2-7 Stiffness

To confirm that whether the rigidity will affect the accuracy or not, the rigidity corresponding to the preload amount.

$$\delta = \frac{P}{k} \mu\text{m} \quad \text{Equal. 2.6}$$

$\delta$  : Deflection  
 P : Working load (kgf)  
 k : Value of rigidity


■ Table 2.36 Value of rigidity

| Type        | Size  | Z0<br>kgf/μm | Z1<br>kgf/μm | Z2<br>kgf/μm | Z3<br>kgf/μm |
|-------------|-------|--------------|--------------|--------------|--------------|
| Medium load | AG15S | 10           | 13           | 15           | 16           |
|             | AG20S | 11           | 14           | 16           | 17           |
|             | AG25S | 14           | 17           | 20           | 22           |
|             | AG30S | 16           | 20           | 23           | 24           |
| Heavy load  | AG15C | 16           | 20           | 24           | 25           |
|             | AG20C | 19           | 24           | 28           | 29           |
|             | AG25C | 25           | 31           | 36           | 39           |
|             | AG30C | 28           | 36           | 41           | 44           |


### 2-2-8 Lubrication

#### (1) Grease

##### ◆ Grease Nipple

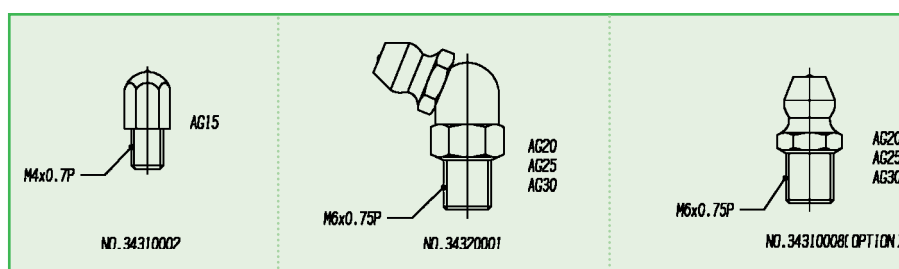

#### ◆ Mounting Location

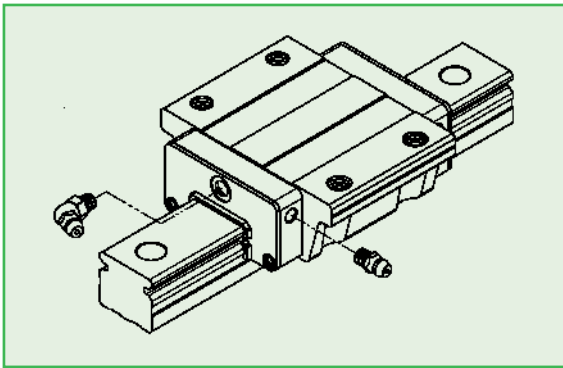

The standard location of the grease fitting is at both ends of the block, but the nipple may optionally be mounted in the side of block. As for the lateral installation, we recommended that the nipple should be mounted at the non-reference side, otherwise please contact us. It is possible to carry out the lubrication by using the oil-piping joint.

#### ◆ The Oil Amount for a Block Full with Grease

■ Table 2.37 The Oil Amount for a Block Full with Grease

| Size | Medium load (cm3) | Heavy load (cm3) | Size | Medium load (cm3) | Heavy load (cm3) |
|------|-------------------|------------------|------|-------------------|------------------|
| AG15 | 0.5               | 0.6              | AG25 | 1.7               | 2.1              |
| AG20 | 0.9               | 1.1              | AG30 | 3.8               | 4.4              |


#### ◆ Frequency of Replenishment

Replenishing the oil every 100km. °

### (2) Oil

The recommended viscosity of oil is about 30~150cst. If customers need to use the oil-type lubrication, please inform us, the block will not be prelubricated with grease before shipment.

#### ◆ Types of Oil Piping Joint

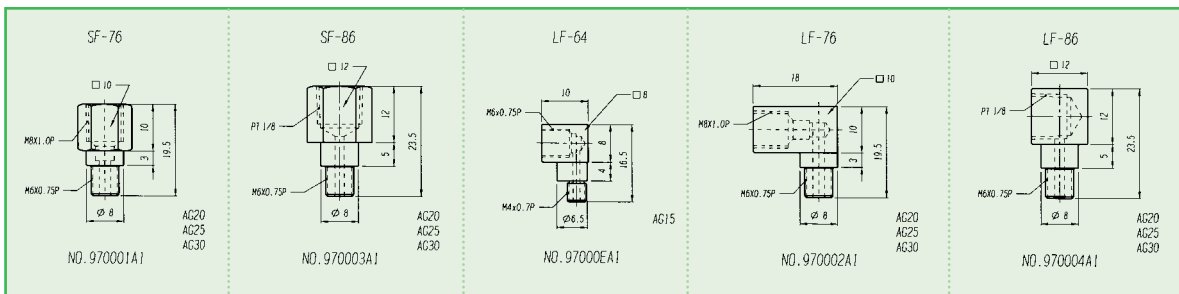

#### ◆ Oil Feeding Rate


■ Table 2.38

| Size | Feeding rate (cm <sup>3</sup> /hr) |
|------|------------------------------------|
| AG15 | 0.2                                |
| AG20 | 0.2                                |
| AG25 | 0.3                                |
| AG30 | 0.3                                |

## 2-2-9 Dust Protection Equipment

### (1) Code of equipment

If the following equipment needed, please add the code followed by model number.

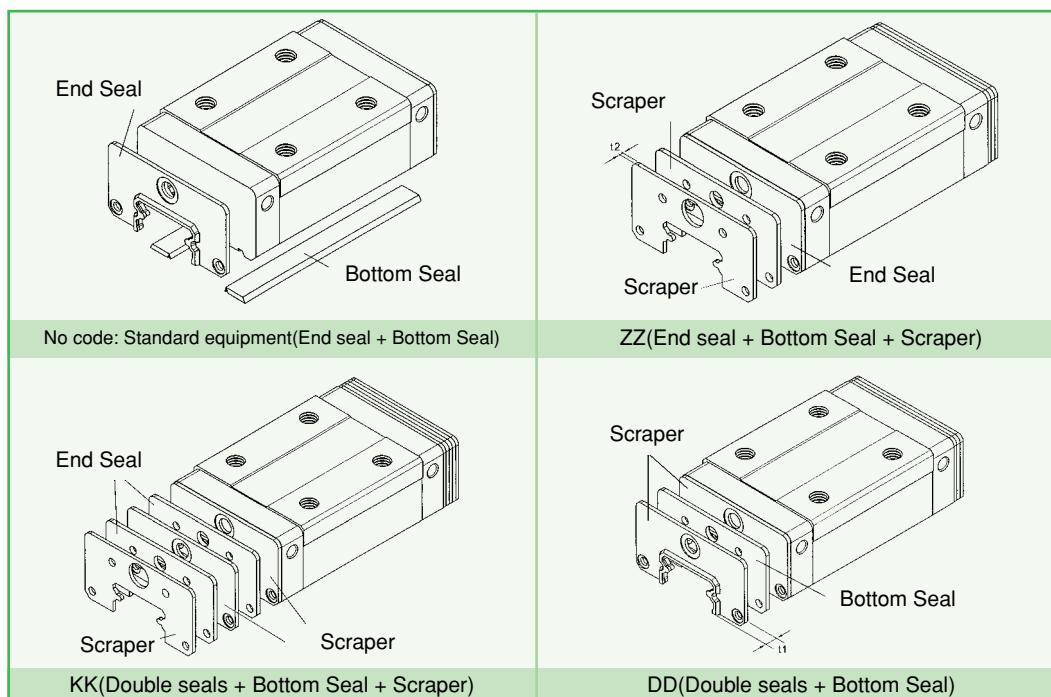

### (2) End seal and bottom seal

To prevent the life reduction due to the groove surface damaged by iron chips or dust entering the block

### (3) Double seals

Enhancing the wiping effect, the foreign matters can be completely wiped out of block.

■ Table 2.39 Order number of End seal

| Size | Part No. | Thickness (t1)mm |
|------|----------|------------------|
| AG15 | 92000FA1 | 2.6              |
| AG20 | 92000GA1 | 2.6              |
| AG25 | 92000HA1 | 3                |
| AG30 | 92000IA1 | 3.2              |

### (4) Scraper

The scraper has the ability of isolating the high-temp. iron chips and removing the bigger foreign matters.


■ Table 2.40 Order number of Scraper

| Size | Part No. | Thickness (t2)mm |
|------|----------|------------------|
| AG15 | 980009A1 | 1.5              |
| AG20 | 98000AA1 | 1.5              |
| AG25 | 98000BA1 | 1.5              |
| AG30 | 98000CA1 | 1.5              |



### (5) Caps for rail mounting holes

The caps are used to cover the mounting holes to prevent chips or other foreign matters from entering the holes. The caps will be enclosed in each rail packing

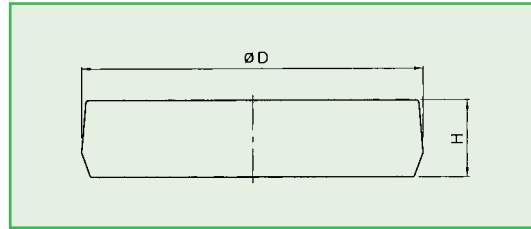

■ Table 2.41 Caps for rail mounting holes

| Model No. | Bolt Size | Part No. | Diameter(D)mm | Thickness(H)mm |
|-----------|-----------|----------|---------------|----------------|
| AGR15R    | M3        | 950001A1 | 6.3           | 1.2            |
| AGR20R    | M5        | 950003C1 | 9.7           | 2.2            |
| AGR25R    | M6        | 950004C1 | 11.3          | 2.5            |
| AGR30R    | M6        | 950004C1 | 11.3          | 2.5            |
| AGR15U    | M4        | 950002C1 | 7.7           | 1.1            |
| AGR30U    | M8        | 950005C1 | 14.3          | 3.3            |

## 2-2-10 Friction

The maximum value of seal resistance per block are shown in the table.

■ Table 2.42 Seal resistance

| Size  | Resistance(kgf) |
|-------|-----------------|
| AG 15 | 0.1             |
| AG 25 | 0.2             |
| AG 20 | 0.2             |
| AG 30 | 0.5             |


## 2-2-11 The Accuracy Tolerance of Mounting Surface

### (1) The accuracy tolerance of rail-mounting surface

Because of the Gothic contact design, the linear guideway is possessed with high rigidity. As for this characteristic, any unreasonable deviation will not only increase the friction resistance, but also reduce the life.

As long as following the accuracy requirements of mounting surface, the high accuracy and rigidity of linear guideway should be obtained without any difficulty. In order to satisfy the needs of fast installation and smooth movement, HIWIN offers the normal clearance type of preload to customers for its high absorption ability for deviation of mounting surface accuracy.

- ◆ The parallelism tolerance of reference surface (P)

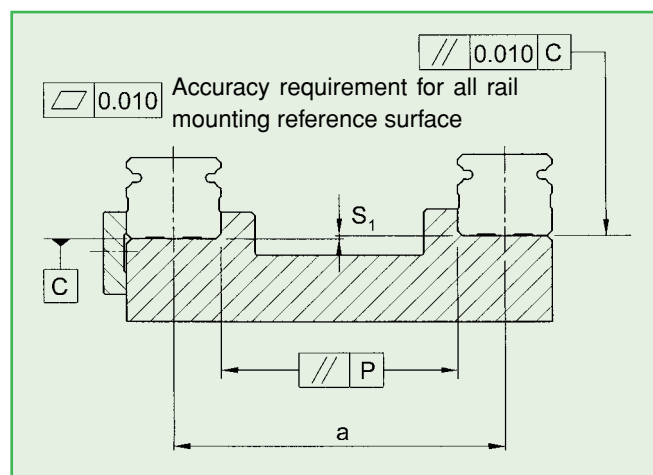

■ Table 2.43 Max. Parallelism Tolerance(P)

Unit : mm

| Size  | Preload classes |       |       |       |       |
|-------|-----------------|-------|-------|-------|-------|
|       | ZF              | Z0    | Z1    | Z2    | Z3    |
| AG 15 | 0.030           | 0.020 | 0.016 | 0.013 | 0.010 |
| AG 20 | 0.035           | 0.025 | 0.020 | 0.017 | 0.015 |
| AG 25 | 0.040           | 0.030 | 0.023 | 0.020 | 0.018 |
| AG 30 | 0.045           | 0.034 | 0.028 | 0.025 | 0.020 |

◆ The accuracy tolerance of reference surface height (S1)

$$S_1 = a \times K \text{ ..... Equal. 2.7}$$

$S_1$  : Max. tolerance of height

$a$  : distance between paired rails


$K$  : coefficient of tolerance of height

■ Table 2.44 Max. Tolerance of Height

| Size | Preload classes      |                      |                      |                      |                    |
|------|----------------------|----------------------|----------------------|----------------------|--------------------|
|      | ZF                   | Z0                   | Z1                   | Z2                   | Z3                 |
| K    | $6.6 \times 10^{-4}$ | $4.9 \times 10^{-4}$ | $3.2 \times 10^{-4}$ | $2.6 \times 10^{-4}$ | $2 \times 10^{-4}$ |

## (2) The accuracy tolerance of block-mounting surface

◆ the tolerance of the height of reference surface when two or more pieces are used in parallel (S2)

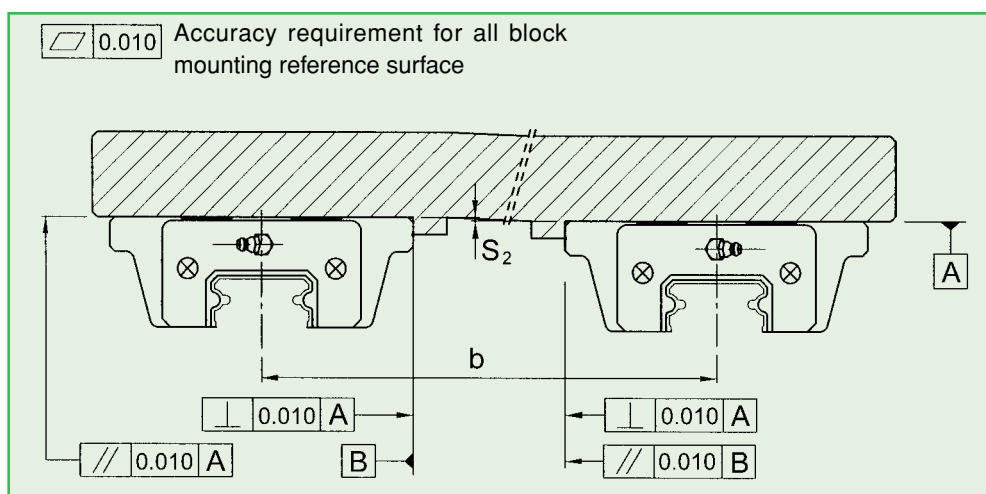


$$S_2 = b \times 5 \times 10^{-5} \text{ ..... Equal. 2.8}$$

$S_2$  : Max. tolerance of height

$b$  : distance between paired blocks

- ◆ the accuracy tolerance of mounting reference surface for paired blocks at the rail (S<sub>3</sub>)

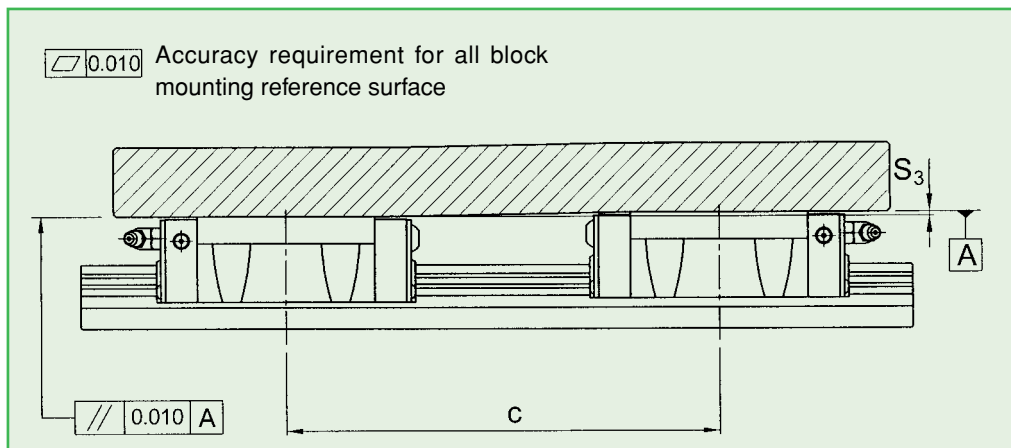

$$S_3 = c \times 5 \times 10^{-5} \quad \text{Equal. 2.9}$$


S<sub>3</sub> : Max. tolerance of height  
c : distance between paired blocks

## 2-2-12 Cautions for Installation

### (1) Shoulder heights and fillets

The improper shoulder heights and fillets of mounting surfaces will cause the deviation of accuracy and the interference with the chamfered part of the rail or block.

As long as following the recommended shoulder heights and fillets, the accuracy problem of installation should be eliminated.

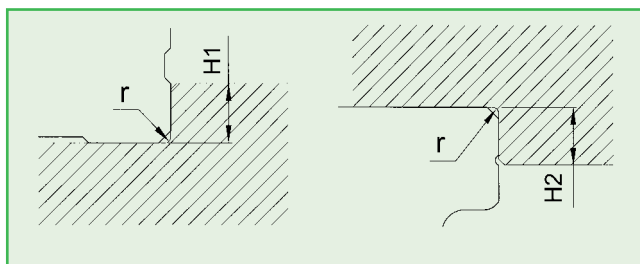

■ Table 2.45 Shoulder Heights and Fillets

| Size | Max. radius of fillets r (mm) | Shoulder height of the rail H1 (mm) | Shoulder height of the block H2 (mm) |
|------|-------------------------------|-------------------------------------|--------------------------------------|
| AG15 | 0.5                           | 3                                   | 4                                    |
| AG20 | 0.5                           | 4                                   | 5                                    |
| AG25 | 1                             | 5                                   | 6                                    |
| AG30 | 1                             | 6                                   | 6                                    |

### (2) Tightening torque of bolts for installation

The improper tightening of bolts will influence the accuracy of Linear Guideway seriously, so that the following tightening torque for different sizes of bolt is recommended.

■ Table 2.46 Torque

| Size  | Bolt size   | Torque (kgf-cm) |
|-------|-------------|-----------------|
| AG 15 | M3x0.5Px16L | 19              |
| AG 20 | M5x0.8Px16L | 90              |
| AG 25 | M6x1Px20L   | 140             |
| AG 30 | M6x1Px25L   | 140             |

### 2-2-13 Standard Length and Max. Length of Rail

**HIWIN** has offered the standard length of rails for customer needs. As for the non-standard E value, to avoid the unstable end part of rail, it is recommended the E value should not be over 1/2 of pitch (P). On the other hand, the E value should not be less than the Emin due to the break of mounting hole.

$$L = (n - 1) \times P + 2 \times E \quad \text{Equal. 2.10}$$

$L$  : Total length of rail

$n$  : Number of mounting holes

$P$  : Distance between any two holes

$E$  : Distance from the center of the last hole to the edge

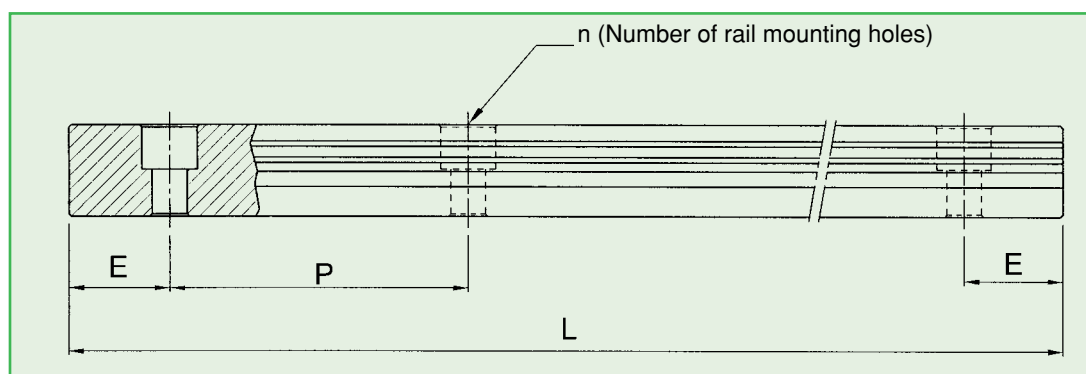





Table 2.47

| Item                              | AGR15    | AGR20      | AGR25      | AGR30      |
|-----------------------------------|----------|------------|------------|------------|
| Standard Length<br>$L(n)$         | 160 (3)  | 220 (4)    | 220 (4)    | 280 (4)    |
|                                   | 220 (4)  | 280 (5)    | 280 (5)    | 440 (6)    |
|                                   | 280 (5)  | 340 (6)    | 340 (6)    | 600 (8)    |
|                                   | 340 (6)  | 460 (8)    | 460 (8)    | 760 (10)   |
|                                   | 460 (8)  | 640 (11)   | 640 (11)   | 1,000 (13) |
|                                   | 640 (11) | 820 (14)   | 820 (14)   | 1,640 (21) |
|                                   | 820 (14) | 1,000 (17) | 1,000 (17) | 2,040 (26) |
|                                   |          | 1,240 (21) | 1,240 (21) | 2,520 (32) |
| Pitch(P)                          | 60       | 60         | 60         | 80         |
| Distance to End ( $E_s$ )         | 20       | 20         | 20         | 20         |
| Min Distance to End ( $E_{min}$ ) | 5        | 6          | 7          | 8          |
| Max. Standard Length              | 1960(33) | 2980(50)   | 4000(67)   | 3960(50)   |
| Max. Length                       | 2000     | 3000       | 4000       | 4000       |

- Note:
1. Tolerance of E value for standard rail is 0.5~0.5 mm. Tolerance of E value for butt-joint is 0~-0.3 mm.
  2. Maximum standard length means the max. rail length with standard E value on both side.

## 2-2-14 Dimensions for HIWIN AG Series

### (1). AGH-SA / AGH-CA

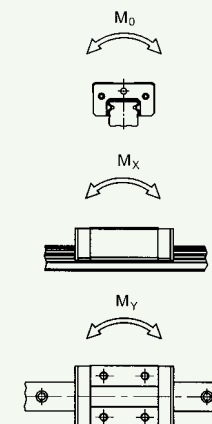
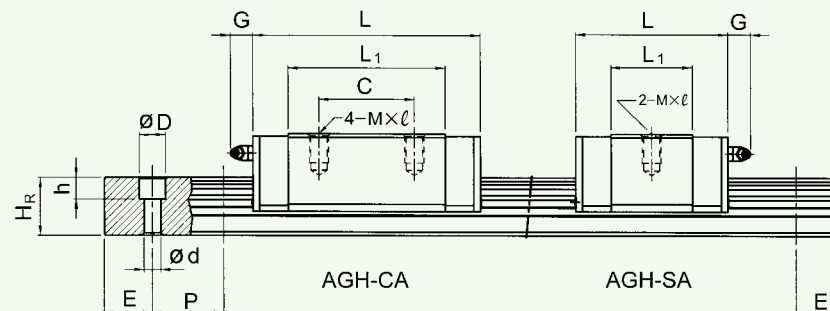
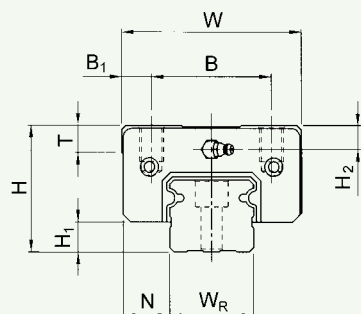


[Click model no. for download drawings .](#)

| Model No. | Dimensions of Assembly (mm) |                |      | Dimensions of Block (mm) |    |                |    |                |      |     |                  |     |                | Dimensions of Rail (mm) |                |     |     |     |    |    |                        | Mounting Bolt for Rail (mm) | Basic Dynamic Load Rating C (kgf) | Basic Static Load Rating C0 (kgf) | Static Rated Moment    |                        |                        | Weight      |             |
|-----------|-----------------------------|----------------|------|--------------------------|----|----------------|----|----------------|------|-----|------------------|-----|----------------|-------------------------|----------------|-----|-----|-----|----|----|------------------------|-----------------------------|-----------------------------------|-----------------------------------|------------------------|------------------------|------------------------|-------------|-------------|
|           |                             |                |      |                          |    |                |    |                |      |     |                  |     |                |                         |                |     |     |     |    |    |                        |                             |                                   |                                   | M <sub>0</sub> (kgf-m) | M <sub>x</sub> (kgf-m) | M <sub>y</sub> (kgf-m) | Block (kg)  | Rail (kg/m) |
|           | H                           | H <sub>1</sub> | N    | W                        | B  | B <sub>1</sub> | C  | L <sub>1</sub> | L    | G   | M <sub>x</sub> ℓ | T   | H <sub>2</sub> | W <sub>R</sub>          | H <sub>R</sub> | D   | h   | d   | P  | E  | M <sub>0</sub> (kgf-m) |                             |                                   |                                   | M <sub>x</sub> (kgf-m) | M <sub>y</sub> (kgf-m) | Block (kg)             | Rail (kg/m) |             |
| AGH15SA   | 24                          | 5              | 9.5  | 34                       | 26 | 4              | -  | 22.8           | 41   | 5.7 | M4X7             | 6   | 5.5            | 15                      | 13.5           | 6   | 4.5 | 3.5 | 60 | 20 | M3X16                  | 440                         | 590                               | 4.8                               | 2.3                    | 2.3                    | 0.12                   | 1.43        |             |
| AGH15CA   | 24                          | 5              | 9.5  | 34                       | 26 | 4              | 26 | 38.7           | 56.9 |     | M4X7             | 6   | 5.5            | 15                      | 13.5           | 6   | 4.5 | 3.5 | 60 | 20 |                        | M3X16                       | 640                               | 1,010                             | 8.3                    | 6.3                    | 6.3                    |             | 0.17        |
| AGH20SA   | 28                          | 6              | 11   | 42                       | 32 | 5              | -  | 26.2           | 48   | 12  | M5X8             | 7.5 | 6              | 20                      | 15.5           | 9.5 | 8.5 | 6   | 60 | 20 | M5X16                  | 650                         | 920                               | 10.1                              | 4.5                    | 4.5                    | 0.2                    | 2.16        |             |
| AGH20CA   | 28                          | 6              | 11   | 42                       | 32 | 5              | 32 | 44.1           | 65.9 |     | M5X8             | 7.5 | 6              | 20                      | 15.5           | 9.5 | 8.5 | 6   | 60 | 20 |                        | M5X16                       | 970                               | 1,450                             | 15.9                   | 10.4                   | 10.4                   |             | 0.29        |
| AGH25SA   | 33                          | 7              | 12.5 | 48                       | 35 | 6.5            | -  | 34.5           | 58.7 | 12  | M6X9             | 8   | 7              | 23                      | 18.5           | 11  | 9   | 7   | 60 | 20 | M6X20                  | 1,080                       | 1,330                             | 16.7                              | 7.8                    | 7.8                    | 0.34                   | 2.95        |             |
| AGH25CA   | 33                          | 7              | 12.5 | 48                       | 35 | 6.5            | 35 | 58.3           | 82.5 |     | M6X9             | 8   | 7              | 23                      | 18.5           | 11  | 9   | 7   | 60 | 20 |                        | M6X20                       | 1,550                             | 2,290                             | 28.7                   | 21.1                   | 21.1                   |             | 0.51        |
| AGH30SA   | 42                          | 10             | 16   | 60                       | 40 | 10             | -  | 36.6           | 66.4 | 12  | M8X12            | 9   | 8              | 28                      | 24             | 11  | 9   | 7   | 80 | 20 | M6X25                  | 1,550                       | 2,030                             | 30.8                              | 14.0                   | 14.0                   | 0.57                   | 4.76        |             |
| AGH30CA   | 42                          | 10             | 16   | 60                       | 40 | 10             | 40 | 65.2           | 95   |     | M8X12            | 9   | 8              | 28                      | 24             | 11  | 9   | 7   | 80 | 20 |                        | M6X25                       | 2,470                             | 3,390                             | 51.3                   | 35.5                   | 35.5                   |             | 0.88        |

Above listed dimensions of rail are dimensions of AGR-R ( Bolt hole, mounting from above), dimensions of AGR-U ( Large bolt hole, mounting from above) refer to Page 53, and dimensions of AGR-T ( Tapped hole, mounting from below) refer to Page 53.

(2). AGW-SA / AGW-CA

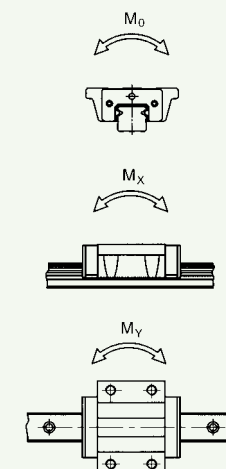
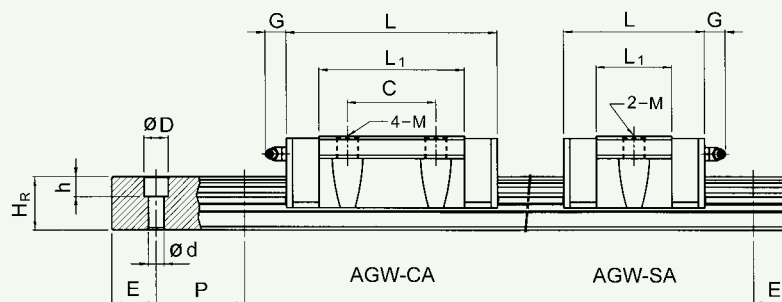
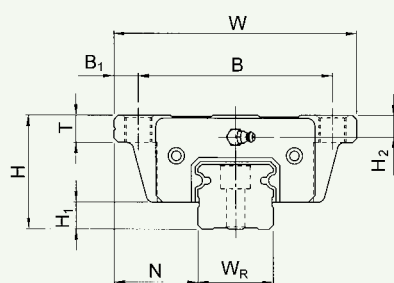


[Click model no. for download drawings .](#)

| Model No. | Dimensions of Assembly (mm) |                |      | Dimensions of Block (mm) |    |                |    |                |      |     |     |    |                | Dimensions of Rail (mm) |                |     |     |     |    |    |                        | Mounting Bolt for Rail (mm) | Basic Dynamic Load Rating C (kgf) | Basic Static Load Rating C <sub>o</sub> (kgf) | Static Rated Moment    |                        |                        | Weight      |             |
|-----------|-----------------------------|----------------|------|--------------------------|----|----------------|----|----------------|------|-----|-----|----|----------------|-------------------------|----------------|-----|-----|-----|----|----|------------------------|-----------------------------|-----------------------------------|-----------------------------------------------|------------------------|------------------------|------------------------|-------------|-------------|
|           |                             |                |      |                          |    |                |    |                |      |     |     |    |                |                         |                |     |     |     |    |    |                        |                             |                                   |                                               | M <sub>0</sub> (kgf-m) | M <sub>x</sub> (kgf-m) | M <sub>y</sub> (kgf-m) | Block (kg)  | Rail (kg/m) |
|           | H                           | H <sub>1</sub> | N    | W                        | B  | B <sub>1</sub> | C  | L <sub>1</sub> | L    | G   | M   | T  | H <sub>2</sub> | W <sub>R</sub>          | H <sub>R</sub> | D   | h   | d   | P  | E  | M <sub>0</sub> (kgf-m) |                             |                                   |                                               | M <sub>x</sub> (kgf-m) | M <sub>y</sub> (kgf-m) | Block (kg)             | Rail (kg/m) |             |
| AGW15SA   | 24                          | 5              | 18.5 | 52                       | 41 | 5.5            | -  | 22.8           | 41   | 5.7 | M5  | 7  | 5.5            | 15                      | 13.5           | 6   | 4.5 | 3.5 | 60 | 20 | M3X16                  | 440                         | 590                               | 4.8                                           | 2.3                    | 2.3                    | 0.15                   | 1.43        |             |
| AGW15CA   |                             |                |      |                          |    |                | 26 | 38.7           | 56.9 |     |     |    |                |                         |                |     |     |     |    |    |                        | 640                         | 1,010                             | 8.3                                           | 6.3                    | 6.3                    | 0.23                   |             |             |
| AGW20SA   | 28                          | 6              | 19.5 | 59                       | 49 | 5              | -  | 26.2           | 48   | 12  | M6  | 9  | 6              | 20                      | 15.5           | 9.5 | 8.5 | 6   | 60 | 20 | M5X16                  | 650                         | 920                               | 10.1                                          | 4.5                    | 4.5                    | 0.24                   |             | 2.16        |
| AGW20CA   |                             |                |      |                          |    |                | 32 | 44.1           | 65.9 |     |     |    |                |                         |                |     |     |     |    |    |                        | 970                         | 1,450                             | 15.9                                          | 10.4                   | 10.4                   | 0.36                   |             |             |
| AGW25SA   | 33                          | 7              | 25   | 73                       | 60 | 6.5            | -  | 34.5           | 58.7 | 12  | M8  | 10 | 7              | 23                      | 18.5           | 11  | 9   | 7   | 60 | 20 | M6X20                  | 1,080                       | 1,330                             | 16.7                                          | 7.8                    | 7.8                    | 0.44                   | 2.93        |             |
| AGW25CA   |                             |                |      |                          |    |                | 35 | 58.3           | 82.5 |     |     |    |                |                         |                |     |     |     |    |    |                        | 1,550                       | 2,290                             | 28.7                                          | 21.1                   | 21.1                   | 0.68                   |             |             |
| AGW30SA   | 42                          | 10             | 31   | 90                       | 72 | 9              | -  | 36.6           | 66.4 | 12  | M10 | 10 | 8              | 28                      | 24             | 11  | 9   | 7   | 80 | 20 | M6X25                  | 1,550                       | 2,030                             | 30.8                                          | 14.0                   | 14.0                   | 0.72                   |             | 4.76        |
| AGW30CA   |                             |                |      |                          |    |                | 40 | 65.2           | 95   |     |     |    |                |                         |                |     |     |     |    |    |                        | 2,470                       | 3,390                             | 51.3                                          | 35.5                   | 35.5                   | 1.16                   |             |             |

Above listed dimensions of rail are dimensions of AGR-R ( Bolt hole, mounting from above), dimensions of AGR-U ( Large bolt hole, mounting from above) refer to Page 53, and dimensions of AGR-T ( Tapped hole, mounting from below) refer to Page 53.

### (3). AGW-SB / AGW-CB

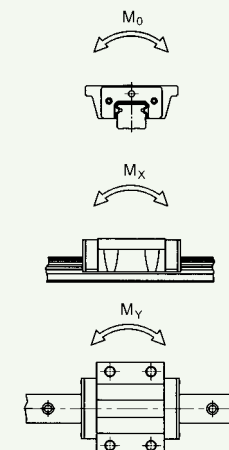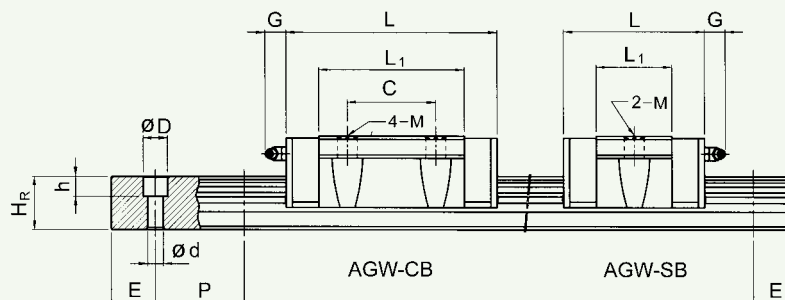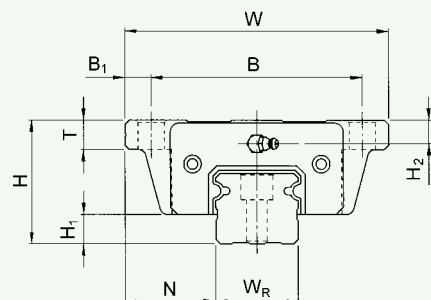


[Click model no. for download drawings .](#)

| Model No. | Dimensions of Assembly (mm) |                |      | Dimensions of Block (mm) |    |                |    |                |      |     |       |    |                | Dimensions of Rail (mm) |                |     |     |     |    |    |                        | Mounting Bolt for Rail (mm) | Basic Dynamic Load Rating C (kgf) | Basic Static Load Rating C <sub>0</sub> (kgf) | Static Rated Moment    |                        |                        | Weight      |             |
|-----------|-----------------------------|----------------|------|--------------------------|----|----------------|----|----------------|------|-----|-------|----|----------------|-------------------------|----------------|-----|-----|-----|----|----|------------------------|-----------------------------|-----------------------------------|-----------------------------------------------|------------------------|------------------------|------------------------|-------------|-------------|
|           |                             |                |      |                          |    |                |    |                |      |     |       |    |                |                         |                |     |     |     |    |    |                        |                             |                                   |                                               | M <sub>0</sub> (kgf-m) | M <sub>x</sub> (kgf-m) | M <sub>y</sub> (kgf-m) | Block (kg)  | Rail (kg/m) |
|           | H                           | H <sub>1</sub> | N    | W                        | B  | B <sub>1</sub> | C  | L <sub>1</sub> | L    | G   | M     | T  | H <sub>2</sub> | W <sub>R</sub>          | H <sub>R</sub> | D   | h   | d   | P  | E  | M <sub>0</sub> (kgf-m) |                             |                                   |                                               | M <sub>x</sub> (kgf-m) | M <sub>y</sub> (kgf-m) | Block (kg)             | Rail (kg/m) |             |
| AGW15SB   | 24                          | 5              | 18.5 | 52                       | 41 | 5.5            | -  | 22.8           | 41   | 5.7 | ψ 4.5 | 7  | 5.5            | 15                      | 13.5           | 6   | 4.5 | 3.5 | 60 | 20 | M3X16                  | 440                         | 590                               | 4.8                                           | 2.3                    | 2.3                    | 0.15                   | 1.43        |             |
| AGW15CB   |                             |                |      |                          |    |                | 26 | 38.7           | 56.9 |     |       |    |                |                         |                |     |     |     |    |    |                        | 640                         | 1,010                             | 8.3                                           | 6.3                    | 6.3                    | 0.23                   |             |             |
| AGW20SB   | 28                          | 6              | 19.5 | 59                       | 49 | 5              | -  | 26.2           | 48   | 12  | ψ 5.5 | 9  | 6              | 20                      | 15.5           | 9.5 | 8.5 | 6   | 60 | 20 | M5X16                  | 650                         | 920                               | 10.1                                          | 4.5                    | 4.5                    | 0.24                   | 2.16        |             |
| AGW20CB   |                             |                |      |                          |    |                | 32 | 44.1           | 65.9 |     |       |    |                |                         |                |     |     |     |    |    |                        | 970                         | 1,450                             | 15.9                                          | 10.4                   | 10.4                   | 0.36                   |             |             |
| AGW25SB   | 33                          | 7              | 25   | 73                       | 60 | 6.5            | -  | 34.5           | 58.7 | 12  | ψ 7   | 10 | 7              | 23                      | 18.5           | 11  | 9   | 7   | 60 | 20 | M6X20                  | 1,080                       | 1,330                             | 16.7                                          | 7.8                    | 7.8                    | 0.44                   | 2.95        |             |
| AGW25CB   |                             |                |      |                          |    |                | 35 | 58.3           | 82.5 |     |       |    |                |                         |                |     |     |     |    |    |                        | 1,550                       | 2,290                             | 28.7                                          | 21.1                   | 21.1                   | 0.68                   |             |             |
| AGW30SB   | 42                          | 10             | 31   | 90                       | 72 | 9              | -  | 36.6           | 66.4 | 12  | ψ 9   | 10 | 8              | 28                      | 24             | 11  | 9   | 7   | 80 | 20 | M6X25                  | 1,550                       | 2,030                             | 30.8                                          | 14.0                   | 14.0                   | 0.72                   | 4.76        |             |
| AGW30CB   |                             |                |      |                          |    |                | 40 | 65.2           | 95   |     |       |    |                |                         |                |     |     |     |    |    |                        | 2,470                       | 3,390                             | 51.3                                          | 35.5                   | 35.5                   | 1.16                   |             |             |


Above listed dimensions of rail are dimensions of AGR-R ( Bolt hole, mounting from above), dimensions of AGR-U ( Large bolt hole, mounting from above) refer to Page 53, and dimensions of AGR-T ( Tapped hole, mounting from below) refer to Page 53.

(4). Dimensions for AGR-T (Rail Mounting from Below)

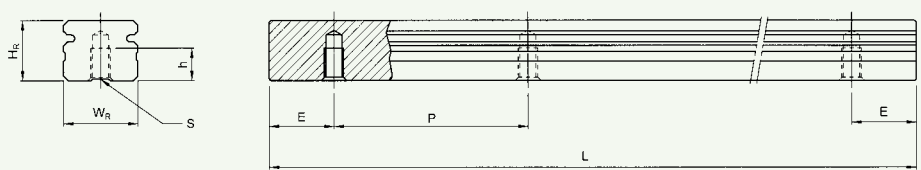

| Model No. | Dimensions of Rail (mm) |                |          |    |    |    | Weight Rail (kg/m) |
|-----------|-------------------------|----------------|----------|----|----|----|--------------------|
|           | W <sub>R</sub>          | H <sub>R</sub> | S        | h  | P  | E  |                    |
| AGR15T    | 15                      | 13.5           | M5x0.8P  | 7  | 60 | 20 | 1.44               |
| AGR20T    | 20                      | 15.5           | M6x1P    | 9  | 60 | 20 | 2.23               |
| AGR25T    | 23                      | 18.5           | M6x1P    | 10 | 60 | 20 | 3.06               |
| AGR30T    | 28                      | 24             | M8x1.25P | 14 | 80 | 20 | 4.83               |

(5). Dimensions for AGR-U (Large Mounting Hole)

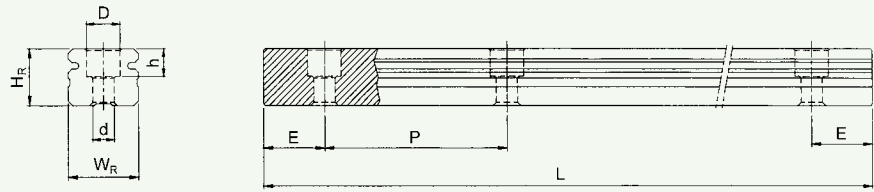

| Model No. | Mounting Bolt for Rail (mm) | Dimensions of Rail (mm) |                |     |     |     |    |    | Weight Rail (kg/m) |
|-----------|-----------------------------|-------------------------|----------------|-----|-----|-----|----|----|--------------------|
|           |                             | W <sub>R</sub>          | H <sub>R</sub> | S   | h   | d   | P  | E  |                    |
| AGR15U    | M4x16                       | 15                      | 13.5           | 7.5 | 5.3 | 4.5 | 60 | 20 | 1.41               |
| AGR30U    | M8x25                       | 28                      | 24             | 14  | 12  | 9   | 80 | 20 | 4.65               |




## 2-3 Miniature MGN/MGW Series

### 2-3-1. Features of MGN Series

1. Tiny and light weight, suitable for miniature equipment.
2. All material are special grade of stainless steel for anti-corrosion ability. Size 9,12 also provide alloy steel type.
3. Gothic arch contact design has high rigidity and accuracy characteristic in all directions.
4. Steel balls are constrained by miniature retainer so without losing balls when remove the block away from the rail.
5. Interchangeable type are available with certain precision class.

### 2-3-2. Construction of MGN Series

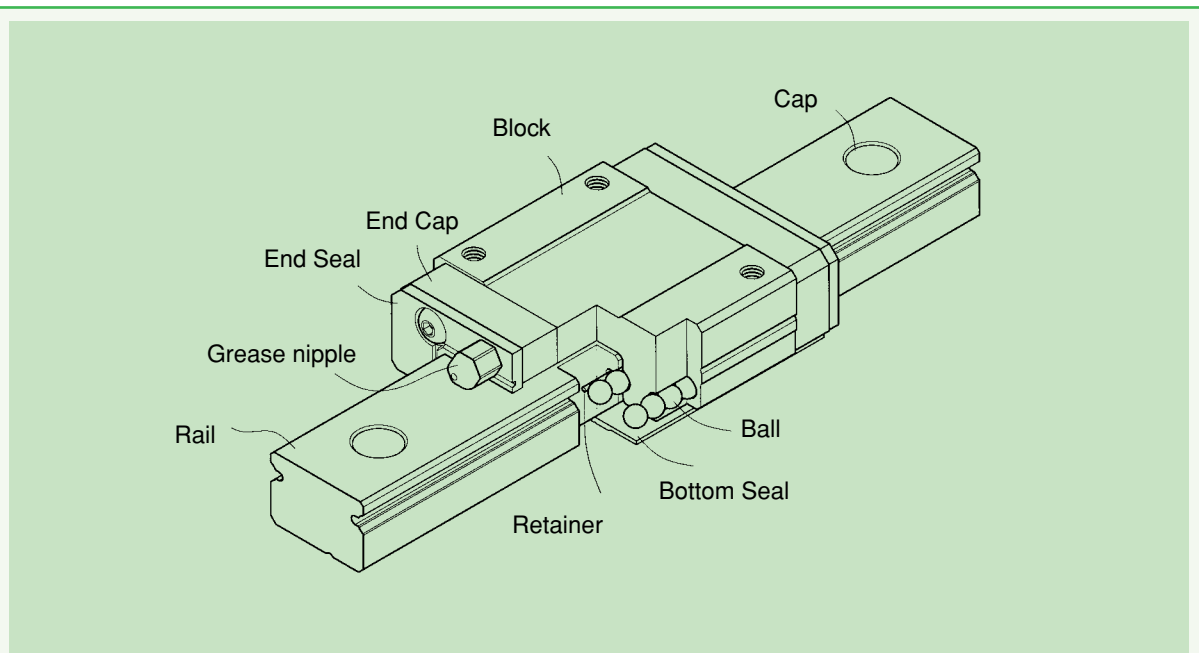


- Rolling Circulation System → Block, rail, end cap, ball, retainer
- Lubrication → The grease nipple is available for MGN15, grease gun can be used for lubricating. Other sizes, syringe can be used to apply oil into the oil hole on end cap.
- Dust Protection → End seal, bottom seal( size12,15 option), cap(size12,15).

### 2-3-3. Feature of MGW Series

The design feature of wide type miniature guideway-MGW:

1. The design of enlarged width has increased the capacity of moment load.
2. Gothic arch contact design has high rigidity characteristic in all directions.
3. Steel balls are constrained by miniature retainer so without losing balls when removing the block away from the rail.
4. All metal components are made of stainless steel for anti-corrosion ability.

### 2-3-4. Construction of MGW Series

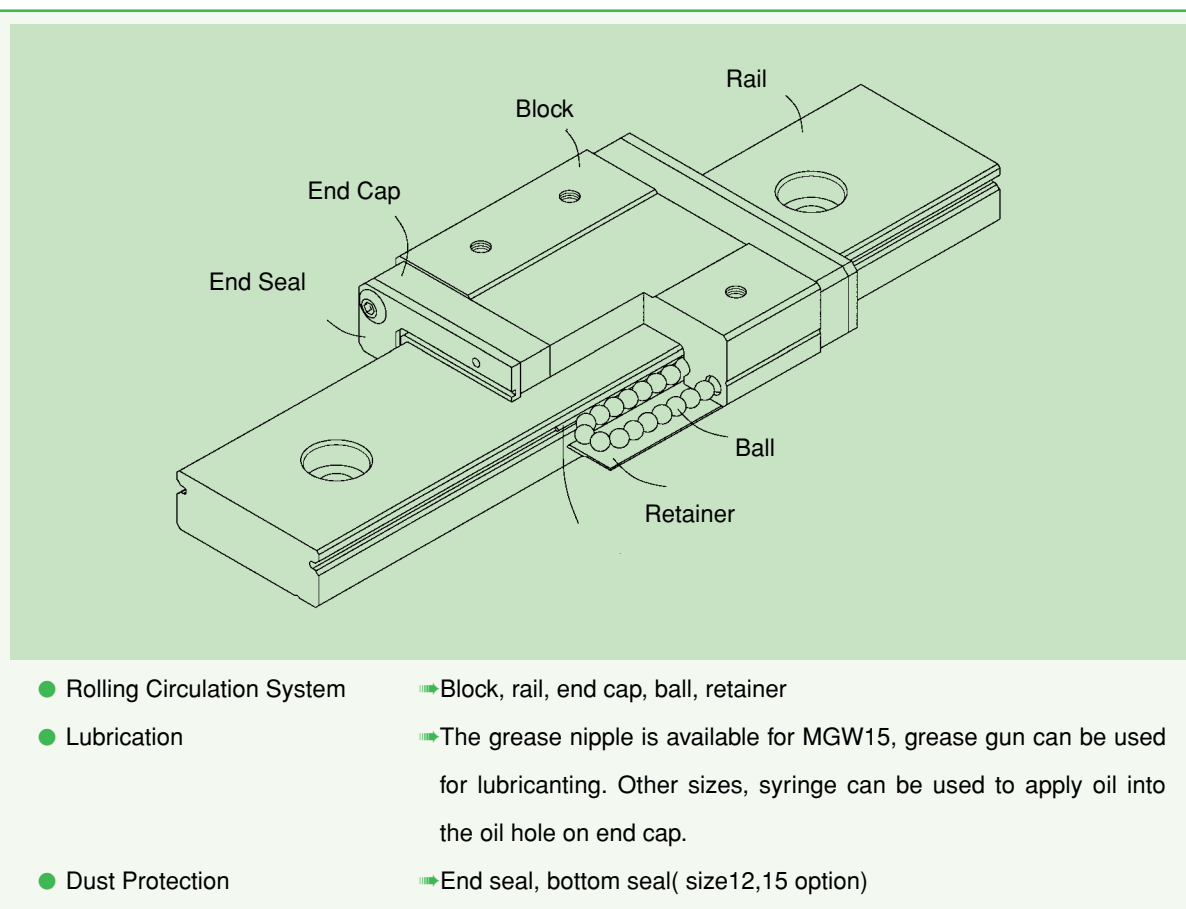

### 2-3-5 Application


MGN/MGW series can be used in many fields, such like:

Semiconductor equipment, PCB assembly equipment, medical equipment, robots, measuring equipment, office automation equipment, and other miniature sliding mechanism.

### 2-3-6 Model Number of MGN/MGW Series


Linear guideway can be classified into non-interchangeable and interchangeable types. The size of two types is same as each other. The main difference between two types is that the interchangeable type of blocks and rails can be freely exchanged, and their accuracy can reach up to P class. Because of the strictly dimensional control, the interchangeable type linear guideway is a smart choice for customer when rails don't need to be paired for an axis. The model number contains the size, type, accuracy class, preload class, etc..

### (1) Non-interchangeable type

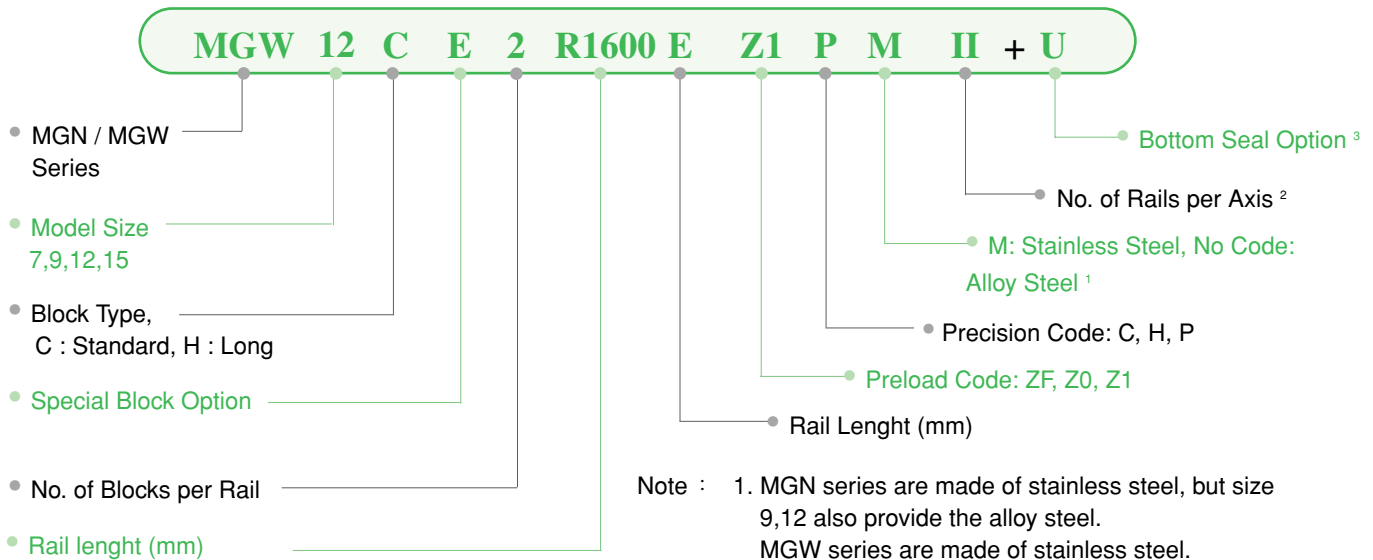


### (2) Interchangeable type

#### ◆ Interchangeable Block

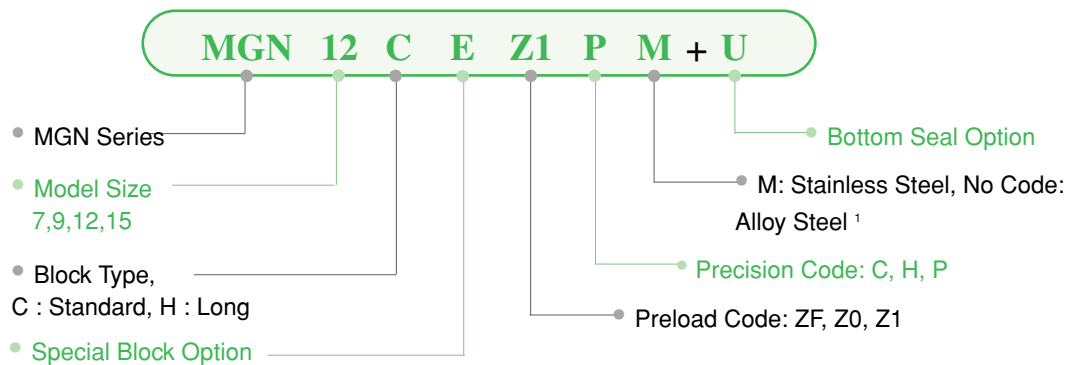

#### ◆ Interchangeable Rail

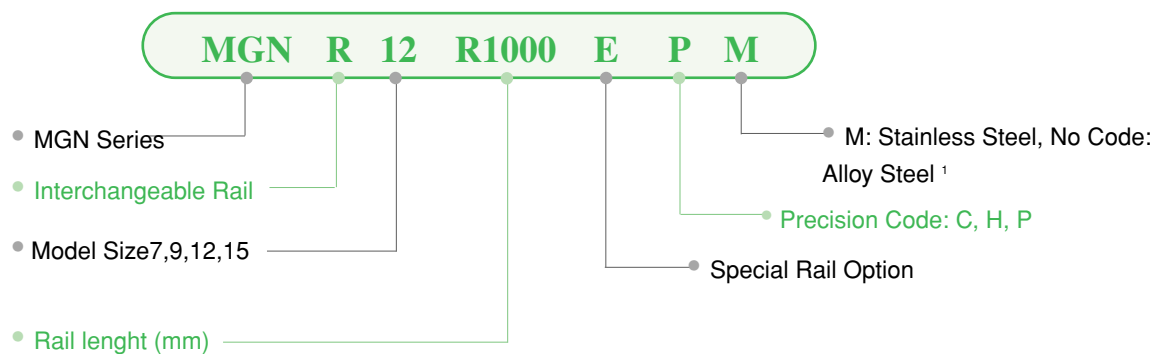

### 2-3-7 Accuracy Standards

The accuracy of MGN/MGW series can be classified into normal(C), high(H), precision(P) three classes. Choosing the class by referencing the accuracy of applied equipment.

#### (1) 1. Non-interchangeable

The accuracy values are the means of measurements taken at the central part of each block.

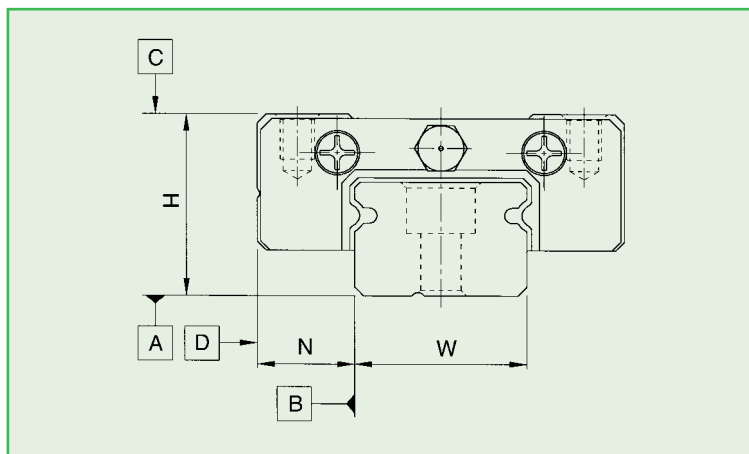


Table 2.48 Accuracy standard of non-interchangeable type

Unit:mm

| Item                                                | Normal (C)              | High (H)    | Precision (P) |
|-----------------------------------------------------|-------------------------|-------------|---------------|
| Dimension tolerance of height H                     | $\pm 0.04$              | $\pm 0.02$  | $\pm 0.01$    |
| Dimension tolerance of width N                      | $\pm 0.04$              | $\pm 0.025$ | $\pm 0.015$   |
| Pair variation of height H                          | 0.03                    | 0.015       | 0.007         |
| Pair variation of width N(Master Rail)              | 0.03                    | 0.02        | 0.01          |
| Running parallelism of block surface C to surface A | According to Table 2.50 |             |               |
| Running parallelism of block surface D to surface B | According to Table 2.50 |             |               |

#### (2) Interchangeable

The multi sets pair variation of height has few difference between the interchangeable type and non-interchangeable type.

Table 2.49 Accuracy standard of interchangeable type

Unit:mm

| Item                                                | Normal (C)                 | High (H)    | Precision (P) |
|-----------------------------------------------------|----------------------------|-------------|---------------|
| Dimension tolerance of height H                     | $\pm 0.04$                 | $\pm 0.02$  | $\pm 0.01$    |
| Dimension tolerance of width N                      | $\pm 0.04$                 | $\pm 0.025$ | $\pm 0.015$   |
| One Set                                             | Pair variation of height H | 0.03        | 0.015         |
|                                                     | Pair variation of width N  | 0.03        | 0.02          |
| Pair variation of height H (Multi Sets)             | 0.07                       | 0.04        | 0.02          |
| Running parallelism of block surface C to surface A | According to Table 2.50    |             |               |
| Running parallelism of block surface D to surface B | According to Table 2.50    |             |               |

### (3). Accuracy of running parallelism

The running parallelism C to A and D to B are with relation to rail length

■ Table 2.50 Accuracy of Running Parallelism

| Rail Length mm | Accuracy |    |    |
|----------------|----------|----|----|
|                | C        | H  | P  |
| 50 以下          | 12       | 6  | 2  |
| 50~80          | 13       | 7  | 3  |
| 80~125         | 14       | 8  | 4  |
| 125~200        | 15       | 9  | 4  |
| 200~250        | 16       | 10 | 5  |
| 250~315        | 17       | 11 | 5  |
| 315~400        | 18       | 11 | 6  |
| 400~500        | 19       | 12 | 6  |
| 500~630        | 20       | 13 | 7  |
| 630~800        | 22       | 14 | 8  |
| 800~1000       | 23       | 16 | 9  |
| 1000~1200      | 25       | 18 | 11 |

### 2-3-8 Preload

MGN/MGW series provides three preload levels for various applications.


■ Table 2.51 Preload Classes

| Class              | Code | Preload                      | Accuracy |
|--------------------|------|------------------------------|----------|
| Light clearance    | ZF   | Clearance 4~10 $\mu\text{m}$ | C        |
| Very Light Preload | Z0   | 0                            | C~P      |
| Light              | Z1   | 0.02C                        | C~P      |

Note : The C in preload column means basic dynamic load rating.

### 2-3-9 Dust Protection Equipment


End seals are standard equipment which fixed on both side of block to prevent the accuracy and life reduction due to dust enter the block. Bottom seals are fixed under the skirt portion of block to prevent dust entering. Customer can order bottom seals by add the mark "+U" follow by the model number. Size 12,15 provides bottom seals for option, but size 7,9 doesn't provides because of the space limit of H1. If the Linear Guideway is equipped with bottom seal, the lateral mounting surface of rail must not exceed H1.

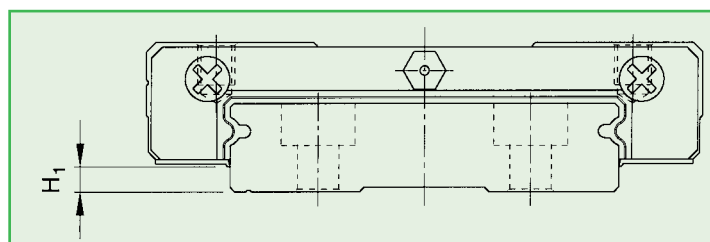

■ Table 2.52

| Size  | Bottom seal | H1 mm |
|-------|-------------|-------|
| MGN7  | -           | -     |
| MGN9  | -           | -     |
| MGN12 | ●           | 2     |
| MGN15 | ●           | 3     |
| MGW 7 | -           | -     |
| MGW 9 | -           | -     |
| MGW12 | ●           | 2.6   |
| MGW15 | ●           | 2.6   |

### 2-3-10 Shoulder Heights and Fillets

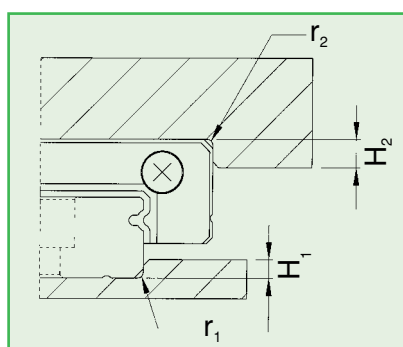

■ Table 2.53 Shoulder heights and fillets

| SIZE   | Max. radius of fillets |        | Shoulder height H1 (mm) | Shoulder height H2 (mm) |
|--------|------------------------|--------|-------------------------|-------------------------|
|        | R1(mm)                 | R2(mm) |                         |                         |
| MGN7   | 0.2                    | 0.2    | 1.2                     | 3                       |
| MGN9   | 0.2                    | 0.3    | 1.7                     | 3                       |
| MGN12  | 0.3                    | 0.4    | 1.7                     | 4                       |
| MGN15  | 0.5                    | 0.5    | 2.5                     | 5                       |
| MGW 7  | 0.2                    | 0.2    | 1.7                     | 3                       |
| MGW 9  | 0.3                    | 0.3    | 2.5                     | 3                       |
| MGW 12 | 0.4                    | 0.4    | 3                       | 4                       |
| MGW 15 | 0.4                    | 0.8    | 3                       | 5                       |

### 2-3-11 Standard Length and Maximum Length of Linear Guideways

HIWIN has offered the standard length of rails for customer needs. As for the non-standard E value, to avoid the unstable end part of rail, it is recommended the E value should not be over 1/2 of pitch (P). On the other hand, the E value should not be less than the Emin due to the break of mounting hole.

$$L = (n - 1) \times P + 2 \times E \quad \text{Equal. 2.11}$$

$L$  : Total length of rail (mm)

$n$  : Number of mounting holes

$P$  : Distance between any two holes (mm)

$E$  : Distance from the center of the last hole to the edge (mm)

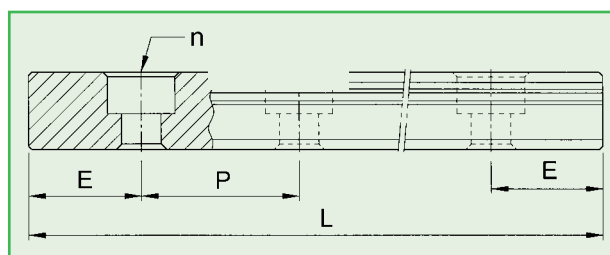


Table 2.54 Rail length

Unit : mm



| Item                              | MGNR<br>7M | MGNR<br>9M | MGNR<br>9 | MGNR<br>12M | MGNR<br>12 | MGNR<br>15M | MGWR<br>7M | MGWR<br>9M | MGWR<br>12M | MGWR<br>15M |
|-----------------------------------|------------|------------|-----------|-------------|------------|-------------|------------|------------|-------------|-------------|
| Standard<br>Length L(n)           | 40 (3)     | 55 (3)     |           | 70 (3)      |            | 70 (2)      | 80 (3)     | 80 (3)     | 110 (3)     | 110 (3)     |
|                                   | 55 (4)     | 75 (4)     |           | 95 (4)      |            | 110 (3)     | 110 (4)    | 110 (4)    | 150 (4)     | 150 (4)     |
|                                   | 70 (5)     | 95 (5)     |           | 120 (5)     |            | 150 (4)     | 140 (5)    | 140 (5)    | 190 (5)     | 190 (5)     |
|                                   | 85 (6)     | 115 (6)    |           | 145 (6)     |            | 190 (5)     | 170 (6)    | 170 (6)    | 230 (6)     | 230 (6)     |
|                                   | 100 (7)    | 135 (7)    |           | 170 (7)     |            | 230 (6)     | 200 (7)    | 200 (7)    | 270 (7)     | 270 (7)     |
|                                   | 130 (9)    | 155 (8)    |           | 195 (8)     |            | 270 (7)     | 260 (9)    | 230 (8)    | 310 (8)     | 310 (8)     |
|                                   |            | 175 (9)    |           | 220 (9)     |            | 310 (8)     |            | 260 (9)    | 350 (9)     | 350 (9)     |
|                                   |            | 195 (10)   |           | 245 (10)    |            | 350 (9)     |            | 290 (10)   | 390 (10)    | 390 (10)    |
|                                   |            | 275 (14)   |           | 270 (11)    |            | 390 (10)    |            | 350 (14)   | 430 (11)    | 430 (11)    |
|                                   |            | 375 (19)   |           | 320 (13)    |            | 430 (11)    |            | 500 (19)   | 510 (13)    | 510 (13)    |
|                                   |            |            |           | 370 (15)    |            | 470 (12)    |            |            | 590 (15)    | 590 (15)    |
|                                   |            |            |           | 470 (19)    |            | 550 (14)    |            |            | 750 (19)    | 750 (19)    |
|                                   |            |            |           | 570 (23)    |            | 670 (17)    |            |            | 910 (23)    | 910 (23)    |
|                                   |            |            |           |             |            | 870 (22)    |            |            |             |             |
| Pitch (P)                         | 15         | 20         |           | 25          |            | 40          | 30         | 30         | 40          | 40          |
| Distance to End ( $E_s$ )         | 5          | 7.5        |           | 10          |            | 15          | 10         | 10         | 15          | 15          |
| Min Distance to End ( $E_{min}$ ) | 3          | 4          |           | 4           |            | 4           | 4          | 4          | 4           | 4           |
| Max. Standard Length              | 295        | 595        | 995       | 995         | 1195       | 990         | 590        | 590        | 990         | 990         |
| Max. Length                       | 300        | 600        | 1000      | 1000        | 1200       | 1000        | 600        | 600        | 1000        | 1000        |

- Note:
1. Tolerance of E value for standard rail is 0.5~-0.5 mm. Tolerance of E value for butt-joint is 0~-0.3 mm.
  2. Maximum standard length means the max. rail length with standard E value on both side.
  3. The specification with "M" mark are stainless steel and without "M" mark are alloy steel.




## 2-3-12 Dimensions for HIWIN MGN/MGW Series

### (1). MGN-C / MGN-H

MGN 7,  
MGN 9,  
MGN 12

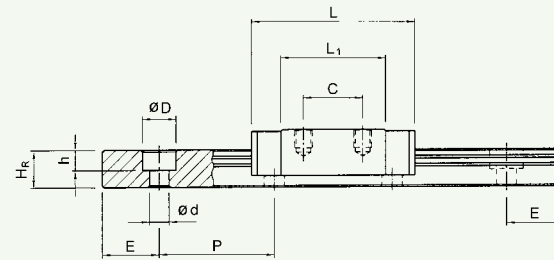

MGN 15

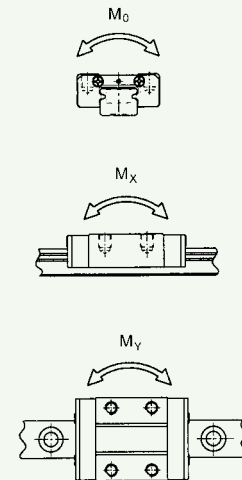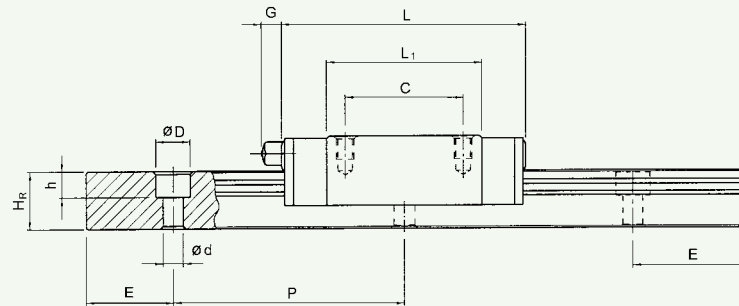



[Click model no. for download drawings .](#)

| Model No. | Dimensions of Assembly (mm) |                |     | Dimensions of Block (mm) |    |                |    |                |      |     |       |                  |                | Dimensions of Rail (mm) |                |     |     |     |    |     |       | Mounting Bolt for Rail (mm) | Basic Dynamic Load Rating C (kgf) | Basic Static Load Rating C0 (kgf) | Static Rated Moment    |                        |                        | Weight     |             |
|-----------|-----------------------------|----------------|-----|--------------------------|----|----------------|----|----------------|------|-----|-------|------------------|----------------|-------------------------|----------------|-----|-----|-----|----|-----|-------|-----------------------------|-----------------------------------|-----------------------------------|------------------------|------------------------|------------------------|------------|-------------|
|           |                             |                |     |                          |    |                |    |                |      |     |       |                  |                |                         |                |     |     |     |    |     |       |                             |                                   |                                   | M <sub>0</sub> (kgf-m) | M <sub>x</sub> (kgf-m) | M <sub>y</sub> (kgf-m) | Block (kg) | Rail (kg/m) |
|           | H                           | H <sub>1</sub> | N   | W                        | B  | B <sub>1</sub> | C  | L <sub>1</sub> | L    | G   | T     | M <sub>x</sub> ℓ | H <sub>2</sub> | W <sub>R</sub>          | H <sub>R</sub> | D   | h   | d   | P  | E   |       |                             |                                   |                                   |                        |                        |                        |            |             |
| MGN 7C    | 8                           | 1.5            | 5   | 17                       | 12 | 2.5            | 8  | 13.5           | 22.5 | -   | ø 0.8 | M2x2.5           | 1.5            | 7                       | 4.8            | 4.2 | 2.3 | 2.4 | 15 | 5   | M2x6  | 100                         | 127                               | 0.48                              | 0.29                   | 0.29                   | 10                     | 0.22       |             |
| MGN 7H    |                             |                |     |                          |    |                | 13 | 21.8           | 30.8 |     |       |                  |                |                         |                |     |     |     |    |     |       | 140                         | 200                               | 0.78                              | 0.49                   | 0.49                   | 15                     |            |             |
| MGN 9C    | 10                          | 2              | 5.5 | 20                       | 15 | 2.5            | 10 | 18.9           | 28.9 | -   | ø 0.8 | M3X3             | 1.8            | 9                       | 6.5            | 6   | 3.5 | 3.5 | 20 | 7.5 | M3x8  | 190                         | 260                               | 1.2                               | 0.75                   | 0.75                   | 16                     | 0.38       |             |
| MGN 9H    |                             |                |     |                          |    |                | 16 | 29.9           | 39.9 |     |       |                  |                |                         |                |     |     |     |    |     |       | 260                         | 410                               | 2                                 | 1.9                    | 1.9                    | 26                     |            |             |
| MGN12C    | 13                          | 3              | 7.5 | 27                       | 20 | 3.5            | 15 | 21.7           | 34.7 | -   | ø 0.8 | M3X3.5           | 2.5            | 12                      | 8              | 6   | 4.5 | 3.5 | 25 | 10  | M3x8  | 290                         | 400                               | 2.6                               | 1.4                    | 1.4                    | 34                     | 0.65       |             |
| MGN12H    |                             |                |     |                          |    |                | 20 | 32.4           | 45.4 |     |       |                  |                |                         |                |     |     |     |    |     |       | 380                         | 600                               | 3.9                               | 3.7                    | 3.7                    | 54                     |            |             |
| MGN15C    | 16                          | 4              | 8.5 | 32                       | 25 | 3.5            | 20 | 26.7           | 42.1 | 4.5 | GN3S  | M3X4             | 3              | 15                      | 10             | 6   | 4.5 | 3.5 | 40 | 15  | M3x10 | 470                         | 570                               | 4.6                               | 2.2                    | 2.2                    | 59                     | 1.06       |             |
| MGN15H    |                             |                |     |                          |    |                | 25 | 43.4           | 58.8 |     |       |                  |                |                         |                |     |     |     |    |     |       | 650                         | 930                               | 7.5                               | 5.9                    | 5.9                    | 92                     |            |             |






## (2). MGW-C / MGW-H

MGW 7,  
MGW 9,  
MGW 12

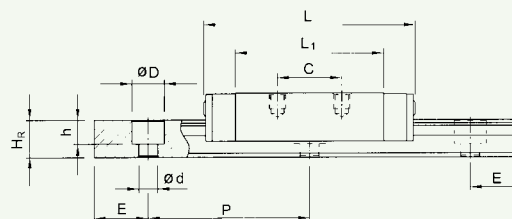

MGW 15

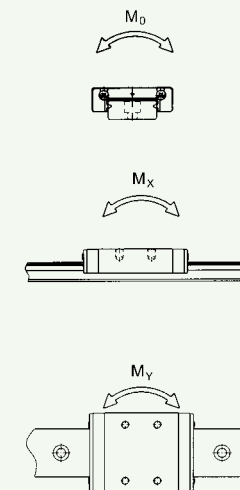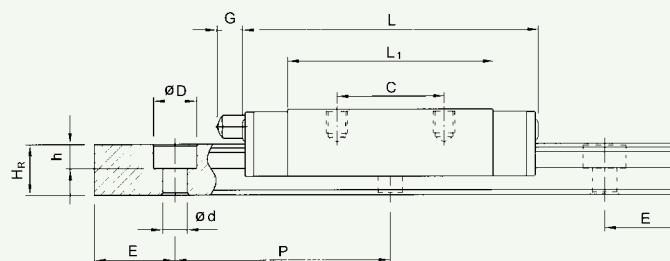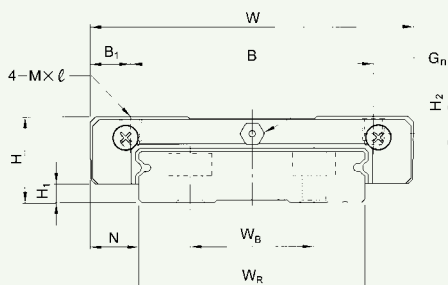


[Click model no. for download drawings .](#)

| Model No. | Dimensions of Assembly (mm) |                |     | Dimensions of Block (mm) |    |                |    |                |      |     |       |                  |                | Dimensions of Rail (mm) |                |                |   |     |     |    |    |                        |                        | Mounting Bolt for Rail (mm) | Basic Dynamic Load Rating C (kgf) | Basic Static Load Rating C0 (kgf) | Static Rated Moment    |                        |                        | Weight     |             |
|-----------|-----------------------------|----------------|-----|--------------------------|----|----------------|----|----------------|------|-----|-------|------------------|----------------|-------------------------|----------------|----------------|---|-----|-----|----|----|------------------------|------------------------|-----------------------------|-----------------------------------|-----------------------------------|------------------------|------------------------|------------------------|------------|-------------|
|           |                             |                |     |                          |    |                |    |                |      |     |       |                  |                |                         |                |                |   |     |     |    |    |                        |                        |                             |                                   |                                   | M <sub>0</sub> (kgf-m) | M <sub>x</sub> (kgf-m) | M <sub>y</sub> (kgf-m) | Block (kg) | Rail (kg/m) |
|           | H                           | H <sub>1</sub> | N   | W                        | B  | B <sub>1</sub> | C  | L <sub>1</sub> | L    | G   | T     | M <sub>x</sub> ℓ | H <sub>2</sub> | W <sub>R</sub>          | W <sub>B</sub> | H <sub>R</sub> | D | h   | d   | P  | E  | M <sub>0</sub> (kgf-m) | M <sub>x</sub> (kgf-m) |                             |                                   |                                   | M <sub>y</sub> (kgf-m) | Block (kg)             | Rail (kg/m)            |            |             |
| MGW 7C    | 9                           | 1.9            | 5.5 | 25                       | 19 | 3              | 10 | 21             | 31.2 | -   | ø 0.9 | M3x3             | 1.85           | 14                      | —              | 5.2            | 6 | 3.2 | 3.5 | 30 | 10 | M3x6                   | 140                    | 210                         | 1.6                               | 0.73                              | 0.73                   | 20                     | 0.51                   |            |             |
| MGW 7H    |                             |                |     |                          |    |                | 19 | 30.8           | 41   |     |       |                  |                |                         |                |                |   |     |     |    |    |                        | 180                    | 320                         | 2.39                              | 1.58                              | 1.58                   | 29                     |                        |            |             |
| MGW 9C    | 12                          | 2.9            | 6   | 30                       | 21 | 4.5            | 12 | 27.5           | 39.3 | -   | ø 1.0 | M3x3             | 2.4            | 18                      | —              | 7              | 6 | 4.5 | 3.5 | 30 | 10 | M3x8                   | 280                    | 420                         | 4.09                              | 1.93                              | 1.93                   | 40                     | 0.91                   |            |             |
| MGW 9H    |                             |                |     |                          |    |                | 23 | 3.5            | 24   |     |       |                  |                |                         |                |                |   |     |     |    |    |                        | 38.5                   | 50.7                        | 350                               | 600                               | 5.56                   | 3.47                   |                        | 3.47       | 57          |
| MGW12C    | 14                          | 3.4            | 8   | 40                       | 28 | 6              | 15 | 31.3           | 46.1 | -   | ø 1.0 | M3x3.6           | 2.8            | 24                      | —              | 8.5            | 8 | 4.5 | 4.5 | 40 | 15 | M4x                    | 400                    | 570                         | 7.17                              | 2.83                              | 2.83                   | 71                     | 1.49                   |            |             |
| MGW12H    |                             |                |     |                          |    |                | 28 | 45.6           | 60.4 |     |       |                  |                |                         |                |                |   |     |     |    |    |                        | 520                    | 840                         | 10.47                             | 5.85                              | 5.85                   | 103                    |                        |            |             |
| MGW15C    | 16                          | 3.4            | 9   | 60                       | 45 | 7.5            | 20 | 38             | 54.8 | 5.2 | GN3S  | M4x4.2           | 3.2            | 42                      | 23             | 9.5            | 8 | 4.5 | 4.5 | 40 | 15 | M4x10                  | 690                    | 940                         | 20.32                             | 5.78                              | 5.78                   | 143                    | 2.86                   |            |             |
| MGW15H    |                             |                |     |                          |    |                | 35 | 57             | 73.8 |     |       |                  |                |                         |                |                |   |     |     |    |    |                        | 910                    | 1410                        | 30.48                             | 12.5                              | 12.5                   | 215                    |                        |            |             |

## 2-4 IG Series

### ■ Features :

1. Integrating the Linear Guideway with magnetic encoder save the installation space greatly.
2. Holding high rigidity and high accuracy concurrently from Linear Guideway and magnetic encoder.
3. Hiding type of sensor and magnetic strip without damage from external material.
4. Non-contact position measurement sensor can achieve Long life performance
5. Long distance measurement is possible (Magnetic Strip up to 32 m)
6. Works reliably in the worst conditions such as moisture, oil, grease, or dirt, even the vibration, high temperature environment.
7. High resolution
8. Easy to install

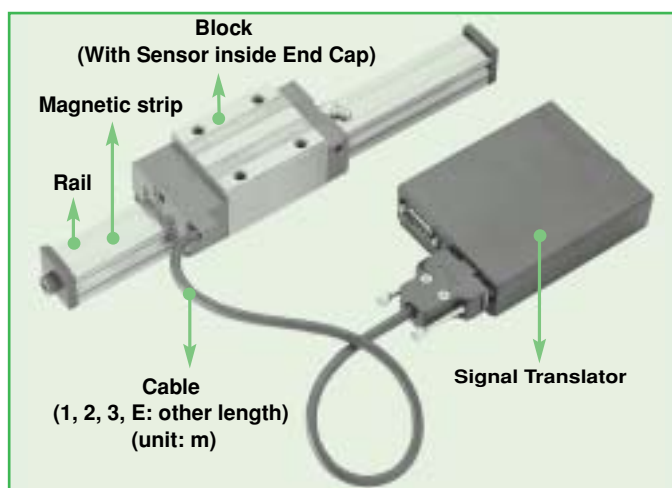

### 2-4-1 Model Number of IG

**IGL W 25 C A E 1 / 2 T 1600 E Z1 P I / II / E1+KK+M10 - 0 - 3 +MD**

- Intelligent Guideway Series: IGL, IGA
- Block Type :  
W: Flange Type  
H: Square Type
- Model size: 20,25,30,35,45,55
- Load Type:  
S: Medium Load  
C: Heavy Load  
H: Super Heavy Load
- Block Mounting Type:  
A: from Above B: from Bottom  
C: Above or Bottom
- E: Special Block Option  
Blank: no Special Option
- Total No. of Blocks with Sensor for all Axis
- No. of Blocks per Axis
- Display (Option)
- Cable Length  
0.5, 1, 2, 3, 5, 10m
- Power Input and Output Signal :
- Sensor Type:  
5, 10, 50, 100, 500, 1000  $\mu$ m
- Dustproof: DD, ZZ, KK
- E1: Self Lubricant Block  
Blank: general Block
- No. of Rails per Axis
- No. of Rails with Magnetic Strip
- Precision Code: C, H, P
- Preload Code: ZF, Z0, Z1~Z3
- E: Special Rail Option  
Blank: no Special
- Rail Length (mm)
- Rail Mounting Type:  
R: from Above T: from Bottom

0: 5V Power Input, TTLOutput  
1: 12V Power Input, TTLOutput  
2: 12V Power Input, HTLOutput  
3: 15V Power Input, TTLOutput  
4: 15V Power Input, HTLOutput  
5: 24V Power Input, TTLOutput  
6: 24V Power Input, HTLOutput


## 2-4-2 Technical Data of HIWIN Intelligent Linear Guideway (IG)

| Item                              | Specifications                                                                                                            |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Resolution (μm)                   | 5, 10, 50, 100, 500, 1000                                                                                                 |
| Accuracy (μm)                     | ±(25+20xL), L: Strip Length (m)                                                                                           |
| Max. Speed (m/min)                | 80 (for 5μm resolution)                                                                                                   |
| Power Supply (V)                  | 5, 12, 15, 24 ±10%                                                                                                        |
| Power Consumption                 | 2 ~ 3 Watt                                                                                                                |
| Output Signals (Pulse)            | A ` B ` $\bar{A}$ ` $\bar{B}$ Phase Difference 90°±10%;<br>Output Current per Channel (Select): 5V TTL—20 mA;<br>HTL—5 mA |
| Working Temperature               | Magnetic Strip: 0~70°C, Sensor: 0~70°C,<br>Translator: 0~50°C                                                             |
| Storage Temperature               | -5°C ~ 70°C                                                                                                               |
| Max. Rail Length                  | 4m (Max. 32m for Butt-joint Rail)                                                                                         |
| Recommended Magnetic Strip Length | Stroke of Rail+25mm Each Side                                                                                             |
| Expansion Coefficient of Strip    | 16x10 <sup>-6</sup> (mm/°C)                                                                                               |
| Protection Class                  | Magnetic Strip: IP 66, Sensor: IP 66, Translator: IP 43                                                                   |

### D-Type 9 Pin Layout:

- ▶ Pin1 = 0V
- ▶ Pin2 = 5V/DC
- ▶ Pin3 = Channel A
- ▶ Pin4 = Channel B
- ▶ Pin7 = Channel  $\bar{A}$
- ▶ Pin8 = Channel  $\bar{B}$

### D-Type 9 Pin (Female) D-Type 9 Pin (male)

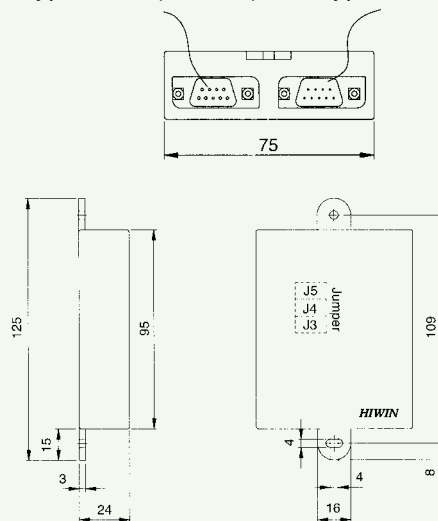


## 2-4-3 Accuracy Classes

for example: IGL/IGA 25, 30, 35


Unit : mm

| Item                                                | Normal (C) | High (H) | Precision (P) |
|-----------------------------------------------------|------------|----------|---------------|
| Dimension Tolerance of Height (H)                   | ± 0.1      | ± 0.04   | 0<br>-0.04    |
| Dimension Tolerance of Width (N)                    | ± 0.1      | ± 0.04   | 0<br>-0.04    |
| Pair Variation of Height (H)                        | 0.02       | 0.015    | 0.007         |
| Pair Variation of Width (N) (Master rail)           | 0.03       | 0.015    | 0.007         |
| Running Parallelism of Block Surface C to Surface A | See Fig. 1 |          |               |
| Running Parallelism of Block Surface D to Surface B | See Fig. 1 |          |               |

Note: If more detail information is needed, please refer to **HIWIN** linear guideway technical information.

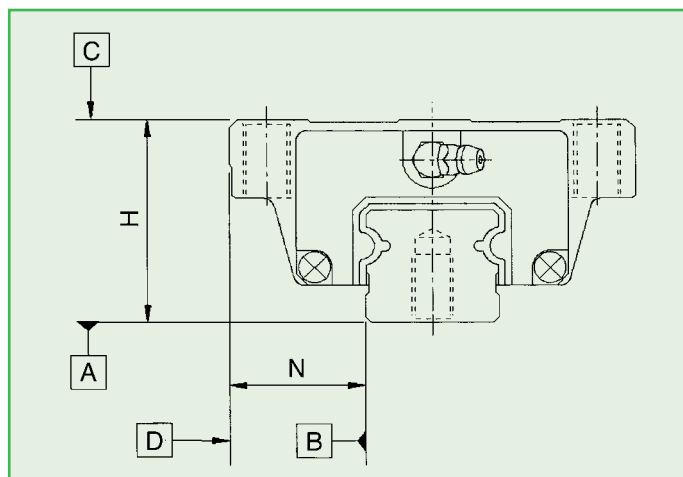

◆ Running parallelism of the Guideway

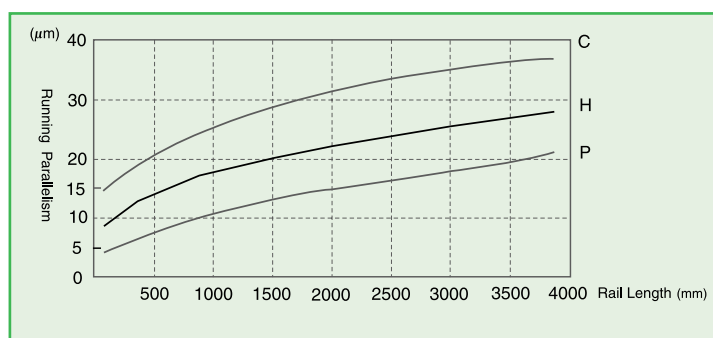


## 2-4-4 Preload

| Preload            |                   | Remark |
|--------------------|-------------------|--------|
| Light Clearance    | Clearance 4~10 μm | ZF     |
| Very Light Preload | 0                 | Z0     |
| Light Preload      | 0.02C             | Z1     |
| Medium Preload     | 0.05C             | Z2     |
| Heavy Preload      | 0.07C             | Z3     |


Note: The C in Preload column means basic dynamic load rating.

(1). IGLH CA / HA Type

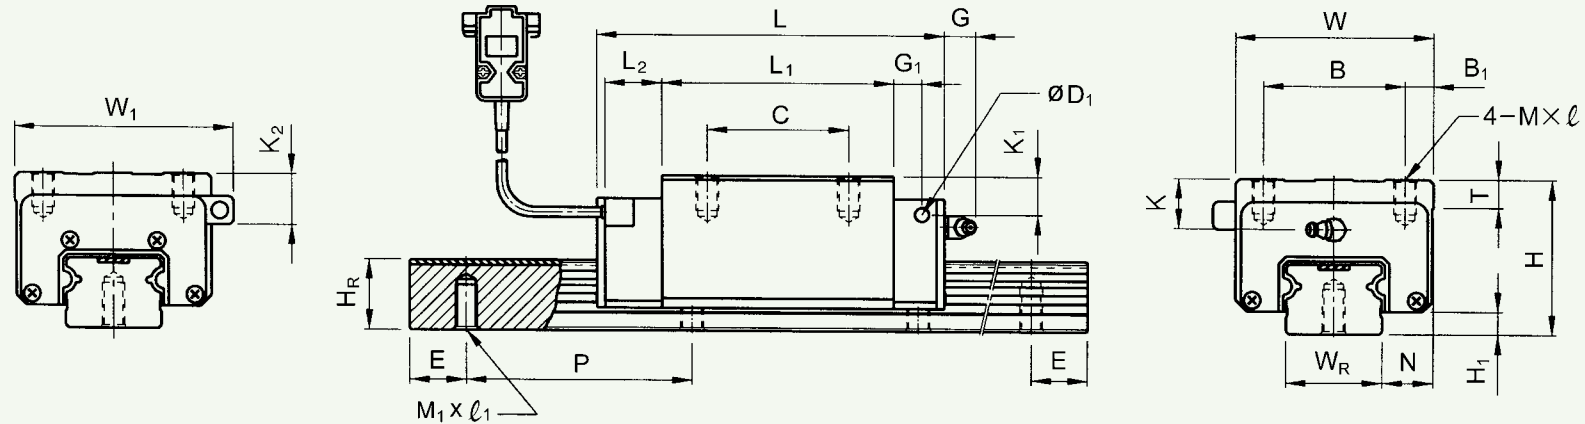


| Model No. | Dimensions of Assembly (mm) |                |      | Dimensions of Block (mm) |                |       |    |                |    |                |                |      |      |                |                |                |                |        |    |                | Dimensions of Rail (mm) |                                |     |      |            | Basic Dynamic Load Rating C (kgf) | Basic Static Load Rating C <sub>0</sub> (kgf) | Weight      |  |
|-----------|-----------------------------|----------------|------|--------------------------|----------------|-------|----|----------------|----|----------------|----------------|------|------|----------------|----------------|----------------|----------------|--------|----|----------------|-------------------------|--------------------------------|-----|------|------------|-----------------------------------|-----------------------------------------------|-------------|--|
|           | H                           | H <sub>1</sub> | N    | W                        | W <sub>1</sub> | L     | B  | B <sub>1</sub> | C  | L <sub>1</sub> | L <sub>2</sub> | G    | K    | D <sub>1</sub> | G <sub>1</sub> | K <sub>1</sub> | K <sub>2</sub> | Mxℓ    | T  | W <sub>R</sub> | H <sub>R</sub>          | M <sub>1</sub> xℓ <sub>1</sub> | P   | E    | Block (kg) |                                   |                                               | Rail (kg/m) |  |
| IGLH 20CA | 30                          | 5              | 12   | 44                       | 51.5           | 88.3  | 32 | 6              | 36 | 52.7           | 20.5           | 12   | 7.1  | 5              | 5.3            | 7.1            | 11             | M5x6   | 8  | 20             | 15                      | M6x8                           | 60  | 20   | 1,650      | 2,670                             | 0.37                                          | 2.08        |  |
| IGLH 20HA |                             |                |      |                          |                | 102.6 |    |                | 50 | 67             |                |      |      |                |                |                |                |        |    |                |                         |                                |     |      | 2,100      | 3,400                             | 0.46                                          |             |  |
| IGLH 25CA | 40                          | 6.5            | 12.5 | 48                       | 56.9           | 95.1  | 35 | 6.5            | 35 | 57.6           | 20.5           | 12   | 11.2 | 5              | 6.8            | 11             | 15             | M6x8   | 8  | 23             | 20                      | M6x12                          | 60  | 20   | 2,410      | 3,880                             | 0.59                                          | 3.15        |  |
| IGLH 25HA |                             |                |      |                          |                | 114.1 |    |                | 50 | 76.6           |                |      |      |                |                |                |                |        |    |                |                         |                                |     |      | 3,210      | 5,180                             | 0.78                                          |             |  |
| IGLH 30CA | 45                          | 7              | 16   | 60                       | 68             | 111.9 | 40 | 10             | 40 | 72             | 20.5           | 12   | 10.5 | 5              | 7.8            | 10.5           | 14             | M8x10  | 8  | 28             | 23                      | M8x15                          | 80  | 20   | 3,380      | 5,460                             | 1.04                                          | 4.41        |  |
| IGLH 30HA |                             |                |      |                          |                | 132.9 |    |                | 60 | 93             |                |      |      |                |                |                |                |        |    |                |                         |                                |     |      | 4,400      | 7,100                             | 1.33                                          |             |  |
| IGLH 35CA | 55                          | 8              | 18   | 70                       | 77             | 123.9 | 50 | 10             | 50 | 82             | 20.5           | 12   | 15   | 5              | 8.8            | 16             | 17             | M8x12  | 10 | 34             | 25                      | M8x16                          | 80  | 20   | 4,180      | 6,740                             | 1.72                                          | 5.93        |  |
| IGLH 35HA |                             |                |      |                          |                | 147.7 |    |                | 72 | 105.8          |                |      |      |                |                |                |                |        |    |                |                         |                                |     |      | 5,430      | 8,770                             | 2.24                                          |             |  |
| IGLH 45CA | 70                          | 10             | 20.5 | 86                       | 92.3           | 143.7 | 60 | 13             | 60 | 99.6           | 20.5           | 12.9 | 21   | 8.5            | 10             | 21             | 22             | M10x17 | 15 | 45             | 32                      | M12x20                         | 105 | 22.5 | 6,020      | 9,710                             | 3.16                                          | 10.01       |  |
| IGLH 45HA |                             |                |      |                          |                | 177.1 |    |                | 80 | 133            |                |      |      |                |                |                |                |        |    |                |                         |                                |     |      | 8,430      | 13,600                            | 4.28                                          |             |  |
| IGLH 55CA | 80                          | 13             | 23.5 | 100                      | 107            | 166.3 | 75 | 12.5           | 75 | 115.8          | 20.5           | 12.9 | 22   | 8.5            | 11             | 22             | 22             | M12x18 | 17 | 53             | 40                      | M14x24                         | 120 | 30   | 9,740      | 13,220                            | 5.30                                          | 14.82       |  |
| IGLH 55HA |                             |                |      |                          |                | 205.2 |    |                | 95 | 154.7          |                |      |      |                |                |                |                |        |    |                |                         |                                |     |      | 11,810     | 18,510                            | 6.40                                          |             |  |

(2). IGLW CA / HA Type

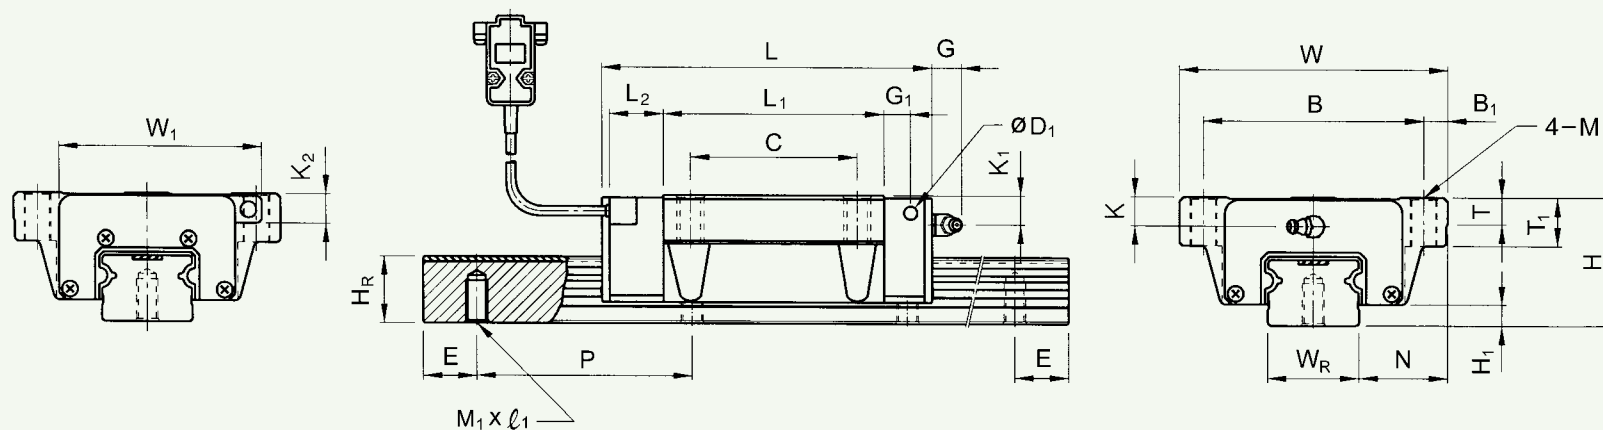


| Model No. | Dimensions<br>of Assembly<br>(mm) |                |      | Dimensions of Block<br>(mm) |                |       |     |                |    |                |                |      |     |     |                |                |                |                |    |                | Dimensions of Rail<br>(mm) |                |                                |     |      | Basic<br>Dynamic<br>Load<br>Rating<br>C (kgf) | Basic<br>Static<br>Load<br>Rating<br>C <sub>0</sub> (kgf) | Weight        |                |
|-----------|-----------------------------------|----------------|------|-----------------------------|----------------|-------|-----|----------------|----|----------------|----------------|------|-----|-----|----------------|----------------|----------------|----------------|----|----------------|----------------------------|----------------|--------------------------------|-----|------|-----------------------------------------------|-----------------------------------------------------------|---------------|----------------|
|           |                                   |                |      |                             |                |       |     |                |    |                |                |      |     |     |                |                |                |                |    |                |                            |                |                                |     |      |                                               |                                                           | Block<br>(kg) | Rail<br>(kg/m) |
|           | H                                 | H <sub>1</sub> | N    | W                           | W <sub>1</sub> | L     | B   | B <sub>1</sub> | C  | L <sub>1</sub> | L <sub>2</sub> | G    | K   | M   | D <sub>1</sub> | G <sub>1</sub> | K <sub>1</sub> | K <sub>2</sub> | T  | T <sub>1</sub> | W <sub>R</sub>             | H <sub>R</sub> | M <sub>1</sub> ×ℓ <sub>1</sub> | P   | E    |                                               |                                                           |               |                |
| IGLW 20CA | 30                                | 5              | 21.5 | 63                          | 61             | 88.3  | 53  | 5              | 40 | 52.7           | 20.5           | 12   | 7.1 | M6  | 5              | 5.3            | 7.1            | 11             | 8  | 10             | 20                         | 15             | M6x8                           | 60  | 20   | 1,650                                         | 2,670                                                     | 0.46          | 2.08           |
| IGLW 20HA |                                   |                |      |                             |                | 102.6 |     |                |    | 67             |                |      |     |     |                |                |                |                |    |                |                            |                |                                |     |      | 2,100                                         | 3,400                                                     | 0.58          |                |
| IGLW 25CA | 36                                | 6.5            | 23.5 | 70                          | 67.5           | 95.1  | 57  | 6.5            | 45 | 57.6           | 20.5           | 12   | 7.2 | M8  | 5              | 6.8            | 7              | 11             | 8  | 14             | 23                         | 20             | M6x12                          | 60  | 20   | 2,410                                         | 3,880                                                     | 0.64          | 3.15           |
| IGLW 25HA |                                   |                |      |                             |                | 114.1 |     |                |    | 76.6           |                |      |     |     |                |                |                |                |    |                |                            |                |                                |     |      | 3,210                                         | 5,180                                                     | 0.86          |                |
| IGLW 30CA | 42                                | 7              | 31   | 90                          | 83             | 111.9 | 72  | 9              | 52 | 72             | 20.5           | 12   | 7.5 | M10 | 5              | 7.8            | 7.5            | 11             | 8  | 16             | 28                         | 23             | M8x15                          | 80  | 20   | 3,380                                         | 5,460                                                     | 1.20          | 4.41           |
| IGLW 30HA |                                   |                |      |                             |                | 132.9 |     |                |    | 93             |                |      |     |     |                |                |                |                |    |                |                            |                |                                |     |      | 4,400                                         | 7,100                                                     | 1.56          |                |
| IGLW 35CA | 48                                | 8              | 33   | 100                         | 92             | 123.9 | 82  | 9              | 62 | 82             | 20.5           | 12   | 8   | M10 | 5              | 8.8            | 9              | 10             | 10 | 18             | 34                         | 25             | M8x16                          | 80  | 20   | 4,180                                         | 6,740                                                     | 1.78          | 5.93           |
| IGLW 35HA |                                   |                |      |                             |                | 147.7 |     |                |    | 105.8          |                |      |     |     |                |                |                |                |    |                |                            |                |                                |     |      | 5,430                                         | 8,770                                                     | 2.34          |                |
| IGLW 45CA | 60                                | 10             | 37.5 | 120                         | 109.3          | 143.7 | 100 | 10             | 80 | 99.6           | 20.5           | 12.9 | 11  | M12 | 8.5            | 10             | 11             | 12             | 15 | 22             | 45                         | 32             | M12x20                         | 105 | 22.5 | 6,020                                         | 9,710                                                     | 3.13          | 10.01          |
| IGLW 45HA |                                   |                |      |                             |                | 177.1 |     |                |    | 133            |                |      |     |     |                |                |                |                |    |                |                            |                |                                |     |      | 8,430                                         | 13,600                                                    | 4.27          |                |
| IGLW 55CA | 70                                | 13             | 43.5 | 140                         | 127            | 166.3 | 116 | 12             | 95 | 115.8          | 20.5           | 12.9 | 12  | M14 | 8.5            | 11             | 12             | 12             | 17 | 26             | 53                         | 40             | M14x24                         | 120 | 30   | 9,740                                         | 13,220                                                    | 5.50          | 14.82          |
| IGLW 55HA |                                   |                |      |                             |                | 205.2 |     |                |    | 154.7          |                |      |     |     |                |                |                |                |    |                |                            |                |                                |     |      | 11,810                                        | 18,510                                                    | 6.70          |                |

### (3). IGAH SA / CA Type

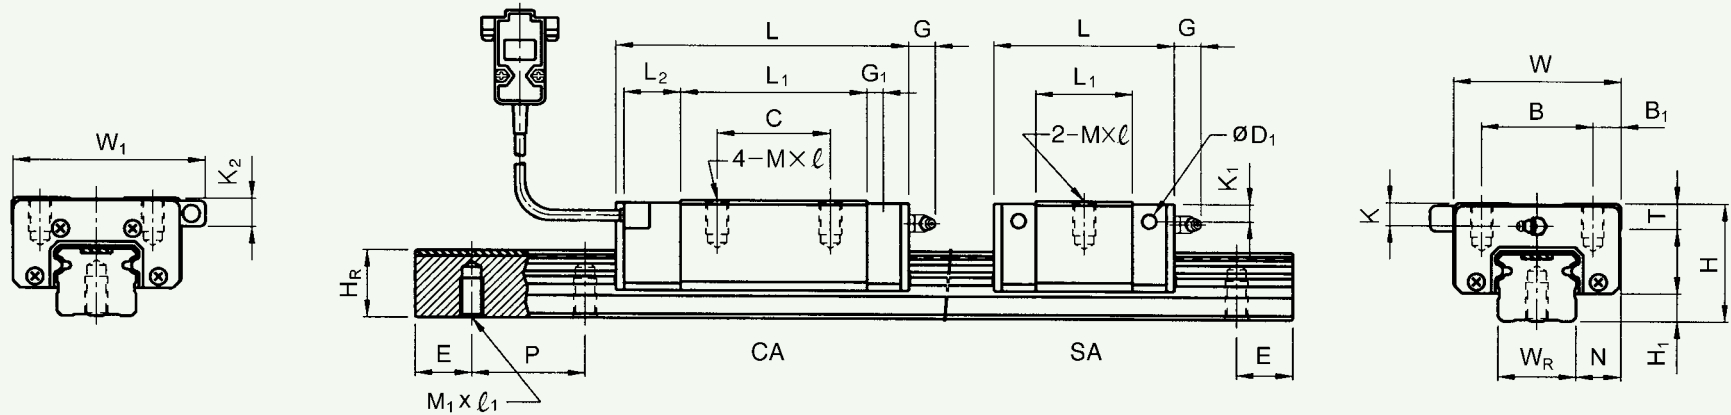

| Model No. | Dimensions of Assembly (mm) |                |      | Dimensions of Block (mm) |                |       |    |                |    |                |                |    |   |                |                |                |                |       |     | Dimensions of Rail (mm) |                |                                |    |    | Basic Dynamic Load Rating C (kgf) | Basic Static Load Rating C <sub>0</sub> (kgf) | Weight     |             |
|-----------|-----------------------------|----------------|------|--------------------------|----------------|-------|----|----------------|----|----------------|----------------|----|---|----------------|----------------|----------------|----------------|-------|-----|-------------------------|----------------|--------------------------------|----|----|-----------------------------------|-----------------------------------------------|------------|-------------|
|           | H                           | H <sub>1</sub> | N    | W                        | W <sub>1</sub> | L     | B  | B <sub>1</sub> | C  | L <sub>1</sub> | L <sub>2</sub> | G  | K | D <sub>1</sub> | G <sub>1</sub> | K <sub>1</sub> | K <sub>2</sub> | Mxℓ   | T   | W <sub>R</sub>          | H <sub>R</sub> | M <sub>1</sub> xℓ <sub>1</sub> | P  | E  |                                   |                                               | Block (kg) | Rail (kg/m) |
| IGAH 20SA | 28                          | 6              | 11   | 42                       | 50             | 60.2  | 32 | 5              | -  | 26.2           | 20.5           | 12 | 6 | 5              | 4.1            | 6              | 10             | M5x8  | 7.5 | 20                      | 15.5           | M5x16                          | 60 | 20 | 650                               | 920                                           | 0.2        | 2.16        |
| IGAH 20CA |                             |                |      |                          |                | 78.1  |    |                | 32 | 44.1           |                |    |   |                |                |                |                |       |     |                         |                |                                |    |    | 970                               | 1,450                                         | 0.29       |             |
| IGAH 25SA | 33                          | 7              | 12.5 | 48                       | 56             | 70.1  | 35 | 6.5            | -  | 34.5           | 20.5           | 12 | 7 | 5              | 4.5            | 7              | 10             | M6x9  | 8   | 23                      | 18.5           | M6x20                          | 60 | 20 | 1,080                             | 1,330                                         | 0.34       | 2.95        |
| IGAH 25CA |                             |                |      |                          |                | 93.9  |    |                | 35 | 58.3           |                |    |   |                |                |                |                |       |     |                         |                |                                |    |    | 1,550                             | 2,290                                         | 0.51       |             |
| IGAH 30SA | 42                          | 10             | 16   | 60                       | 68             | 75.2  | 40 | 10             | -  | 36.6           | 20.5           | 12 | 8 | 5              | 5.8            | 8              | 10             | M8x12 | 9   | 28                      | 24             | M6x25                          | 80 | 20 | 1,550                             | 2,030                                         | 0.57       | 4.76        |
| IGAH 30CA |                             |                |      |                          |                | 103.8 |    |                | 40 | 65.2           |                |    |   |                |                |                |                |       |     |                         |                |                                |    |    | 2,470                             | 3,390                                         | 0.88       |             |

(4). IGAW SA / CA Type

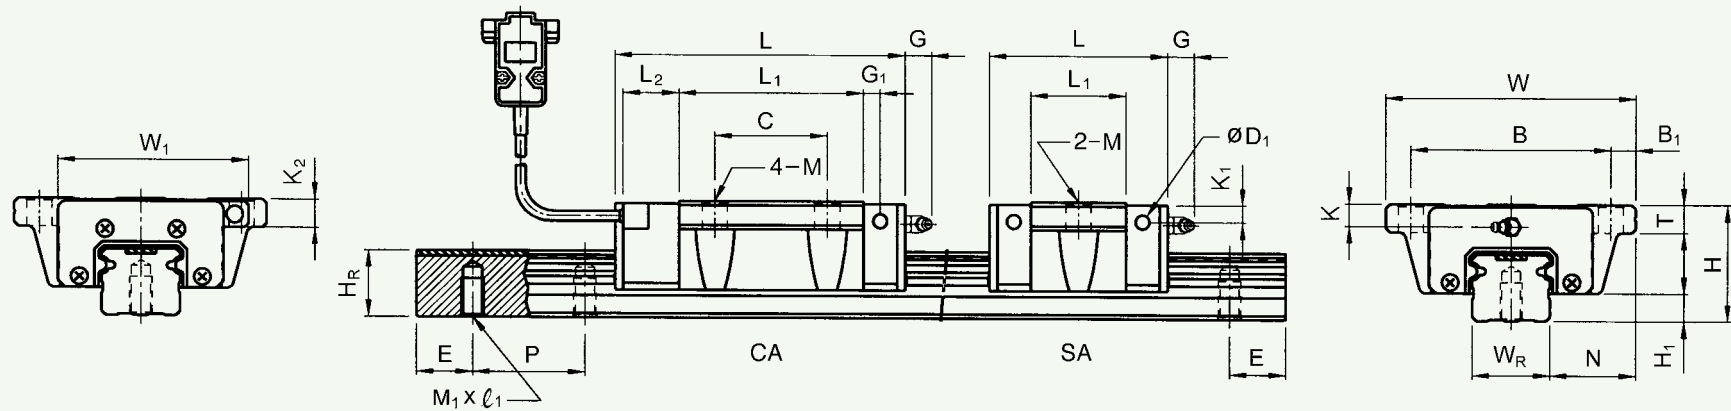


| Model No. | Dimensions of Assembly (mm) |                |      | Dimensions of Block (mm) |                |       |    |                |    |                |                |    |   |                |                |                |                |     |    | Dimensions of Rail (mm) |                |                                |    |    | Basic Dynamic Load Rating C (kgf) | Basic Static Load Rating C <sub>0</sub> (kgf) | Weight     |             |
|-----------|-----------------------------|----------------|------|--------------------------|----------------|-------|----|----------------|----|----------------|----------------|----|---|----------------|----------------|----------------|----------------|-----|----|-------------------------|----------------|--------------------------------|----|----|-----------------------------------|-----------------------------------------------|------------|-------------|
|           |                             |                |      |                          |                |       |    |                |    |                |                |    |   |                |                |                |                |     |    |                         |                |                                |    |    |                                   |                                               | Block (kg) | Rail (kg/m) |
|           | H                           | H <sub>1</sub> | N    | W                        | W <sub>1</sub> | L     | B  | B <sub>1</sub> | C  | L <sub>1</sub> | L <sub>2</sub> | G  | K | D <sub>1</sub> | G <sub>1</sub> | K <sub>1</sub> | K <sub>2</sub> | Mxℓ | T  | W <sub>R</sub>          | H <sub>R</sub> | M <sub>1</sub> xℓ <sub>1</sub> | P  | E  |                                   |                                               |            |             |
| IGAW 20SA | 28                          | 6              | 19.5 | 59                       | 50             | 60.2  | 49 | 5              | -  | 26.2           | 20.5           | 12 | 6 | 5              | 4.1            | 6              | 10             | M6  | 9  | 20                      | 15.5           | M5x16                          | 60 | 20 | 650                               | 920                                           | 0.24       | 2.16        |
| IGAW 20CA |                             |                |      |                          |                | 78.1  |    |                | 32 | 44.1           |                |    |   |                |                |                |                |     |    |                         |                |                                |    |    |                                   |                                               |            |             |
| IGAW 25SA | 33                          | 7              | 25   | 73                       | 56             | 70.1  | 60 | 6.5            | -  | 34.5           | 20.5           | 12 | 7 | 5              | 4.5            | 7              | 10             | M8  | 10 | 23                      | 18.5           | M6x20                          | 60 | 20 | 1,080                             | 1,330                                         | 0.44       | 2.95        |
| IGAW 25CA |                             |                |      |                          |                | 93.9  |    |                | 35 | 58.3           |                |    |   |                |                |                |                |     |    |                         |                |                                |    |    |                                   |                                               |            |             |
| IGAW 30SA | 42                          | 10             | 31   | 90                       | 68             | 75.2  | 72 | 9              | -  | 36.6           | 20.5           | 12 | 8 | 5              | 5.8            | 8              | 10             | M10 | 10 | 28                      | 24             | M6x25                          | 80 | 20 | 1,550                             | 2,030                                         | 0.72       | 4.76        |
| IGAW 30CA |                             |                |      |                          |                | 103.8 |    |                | 40 | 65.2           |                |    |   |                |                |                |                |     |    |                         |                |                                |    |    |                                   |                                               |            |             |



## 2-5 EI Series

### 2-5-1 Structure of E1 Linear Guideway :

The construction of E1 Linear Guideway is shown in the figure, the Block with self-lubricant apparatus. The lubricant oil will be feed directly on the running ball by capillarity.

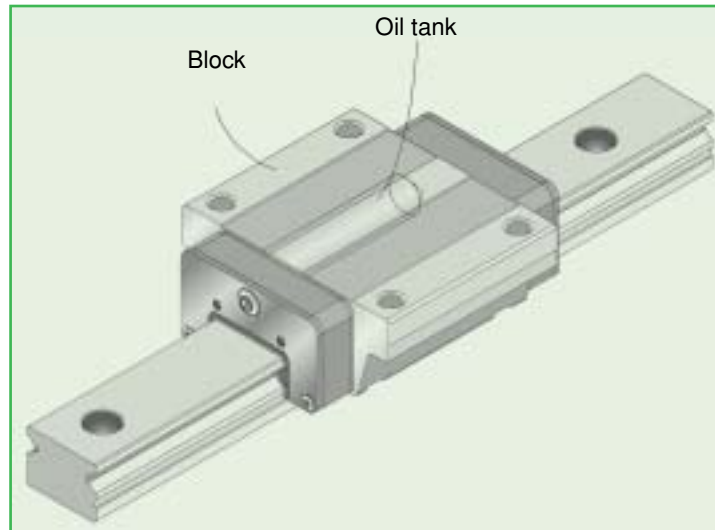

### 2-5-2 Feature of E1 Linear Guideway :

(1). **Cost reduction:** Saving cost from equipping the lubricant device and purchasing the oil.

■ Example LG35C

| Item                                        | Force lubricant                                                                                                                                | E1 (Self-lubricant) Block                                                         |
|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| Lubricant device                            | \$ XXX                                                                                                                                         | -                                                                                 |
| Design and installation of lubricant device | \$ XXX                                                                                                                                         | -                                                                                 |
| Cost of oil purchase                        | $0.3\text{cc/hr} \times 8\text{hrs/day} \times 280\text{days/year} \times 5\text{year} = 3360\text{ cc} \times \text{cost/cc} = \$ \text{XXX}$ | $17\text{ cc}(5\text{ years}10000\text{km}) \times \text{cost/cc} = \$ \text{XX}$ |
| Cost of change oil                          | $3\sim5\text{hrs/time} \times 3\sim5\text{times/year} \times 5\text{year} \times \text{cost/time} = \$ \text{XXX}$                             | -                                                                                 |
| Waste oil disposal                          | $3\sim5\text{ times/year} \times 5\text{year} \times \text{cost/time} = \$ \text{XXX}$                                                         | -                                                                                 |

(2). **Clean and environmental :**

No worry about the pollution caused from oil leaking, therefor, it is suitable for high request clean environment.

(3). **Maintenance free for long period using :**

Self-lubricant Block is maintained free for general application. The lubricant oil will be feed directly on the rolling balls, so it can be used lastingly without wear.

(3). **Save installation space :**

There is nothing change for the length, accuracy, preload, rated static load and rated dynamic load of Block, so it's no need for incrcasing the driven power.

(4). **Used in special environment :**

The outstanding lubricating ability can be achieved by combining with use of grease, so it is suitable for dusty, worse weather and watery environment.

### 2-5-3 Application :

- Machine tool
- Manufacture machine : Plastic injection, printing, paper making, textile machine, food processing machine, wood working machine etc.
- Electronic machine : Semi conductor equipment, robot, X-Y table, measuring and inspecting equipment.
- Others : Medical equipment, transporting device, housing equipment

### 2-5-4 Specification :

- Add "/E1" after the specification of Linear Guideway.
  - ➡ Ex. LGW25CCE2R1600EZ1PII+ZZ/E1
  - ➡ Ex. AGW30CAE2R1600EZ1PII+ZZ/E1


Applicable Specification

| Series | Load type        | Square type | Flange type |              |             |
|--------|------------------|-------------|-------------|--------------|-------------|
|        |                  | Tap hole    | Tap hole    | Drilled hole | Combination |
| LG     | Heavy Load       | LGH - CA    | -           | -            | LGW - CC    |
|        | Super Heavy Load | LGH - HA    | -           | -            | LGW - HC    |
| AG     | Medium Load      | AGH - SA    | AGW - SA    | -            | -           |
|        | Heavy Load       | AGH - CA    | AGW - CA    | -            | -           |

### 2-5-5 Lubrication Capability of E1 Linear Guideway :

- Life testing with light Load :
  - Test condition :
  - ➡ Model No : LGW35CC
  - ➡ Speed : 80m/min
  - ➡ Stroke : 1500mm
  - ➡ Load : 500kgf


- Characteristic of lubricant oil
  1. Synthetic base oil with stable characteristic.
  2. Range of oil operation temperature -15~240 ℃, include the most condition of Linear Guideway.
  3. Reduce friction and anti-abrasion
  4. Against corrosion and rust.
  5. Non-toxic

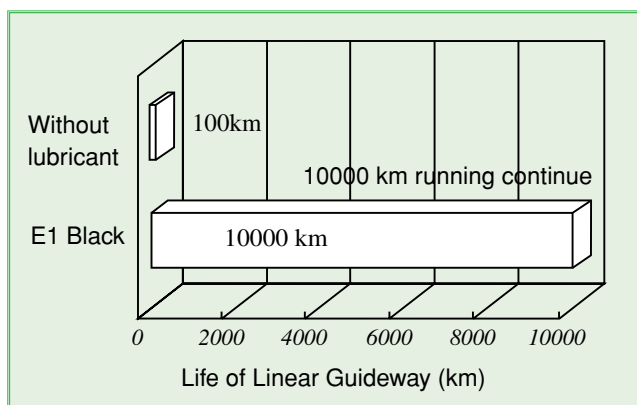

\* Note: the test was carried out without combining the use of grease.

### 2-5-6 Installation

Be careful when using in vertical axis, the arrow mark on block must toward the ground. If inverse the block direction then the self-lubricant function can not work and damage will occur soon.

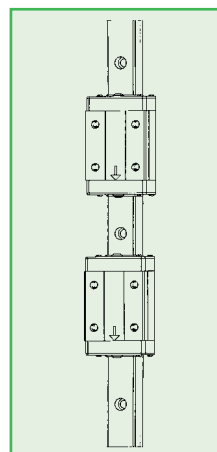


## 2-6 Q1 Series

This HIWIN Q1 series linear guideway adapt the special resin-made ball spacer which not only working as a damper but also as an oil retainer. The spacer absorbs the vibration through contact and lubricant releasing on the area working with the balls.

### Application Issues:

- Low noise demanding system especially under higher working speed.
- Short-stroke motion and/or higher loading situation (cooperated with E1 series is suggested)

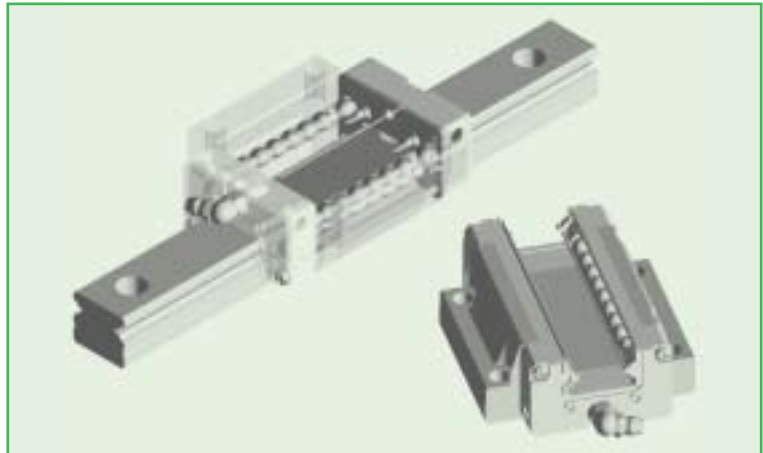


### Features :

#### (1) Lower Noise


The spacer can significantly reduce the sound pressure level (SPL) of the standard guideway especially under a higher moving velocity.

| Test Type: LGW25 (light preload) |                                |
|----------------------------------|--------------------------------|
| Lubrication                      | Grease (AV2)                   |
| Stroke                           | 700 mm                         |
| Position of Condenser Microphone | 500 mm above the test specimen |

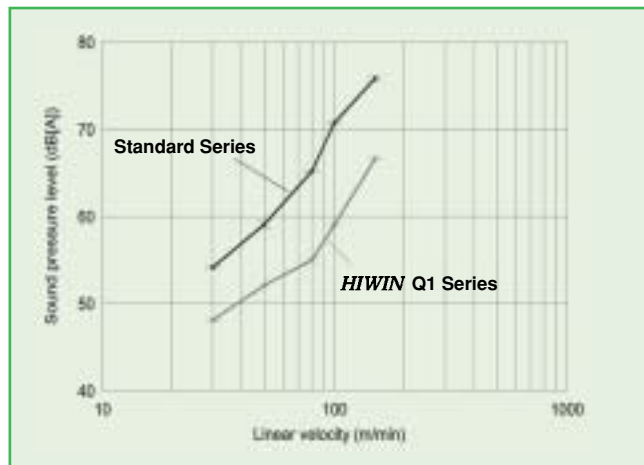

#### (2) Softer Tone

Some noise tone can be eliminated even at a higher velocity. HIWIN Q1 Series is more friendly to the user's ears.

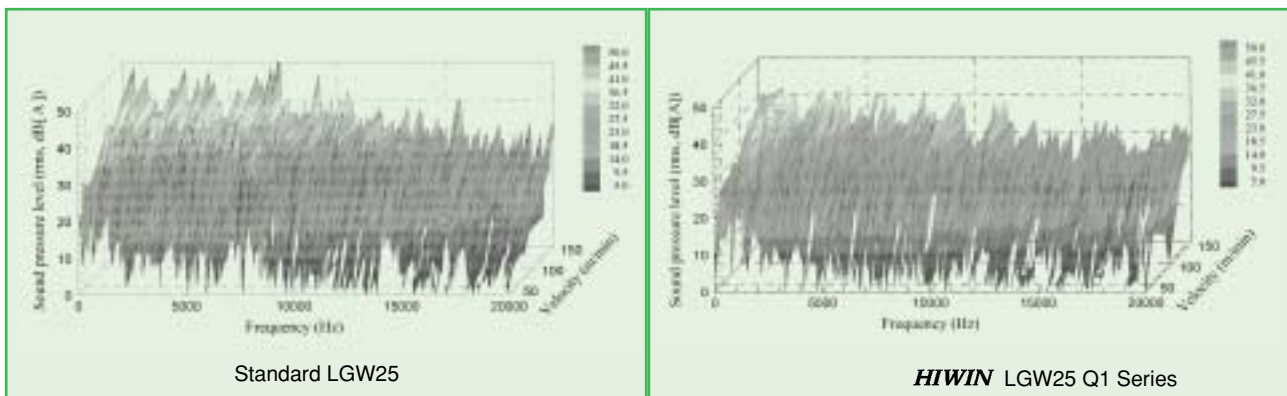

#### (3) Higher reliability


The constant lubricant-releasing mechanism makes it possible to obtain a more reliable working condition and a more economical maintenance.

## 2-6 Q1 Series

This HIWIN Q1 series linear guideway adapt the special resin-made ball spacer which not only working as a damper but also as an oil retainer. The spacer absorbs the vibration through contact and lubricant releasing on the area working with the balls.

### Application Issues:

- Low noise demanding system especially under higher working speed.
- Short-stroke motion and/or higher loading situation (cooperated with E1 series is suggested)

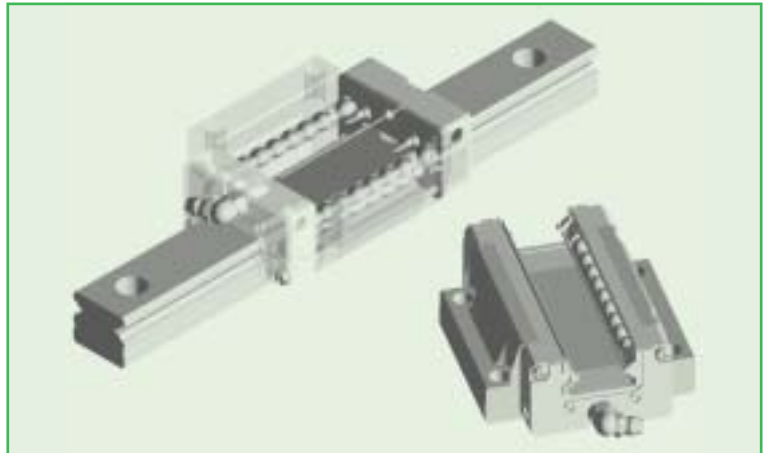


### Features :

#### (1) Lower Noise


The spacer can significantly reduce the sound pressure level (SPL) of the standard guideway especially under a higher moving velocity.

| Test Type: LGW25 (light preload) |                                |
|----------------------------------|--------------------------------|
| Lubrication                      | Grease (AV2)                   |
| Stroke                           | 700 mm                         |
| Position of Condenser Microphone | 500 mm above the test specimen |

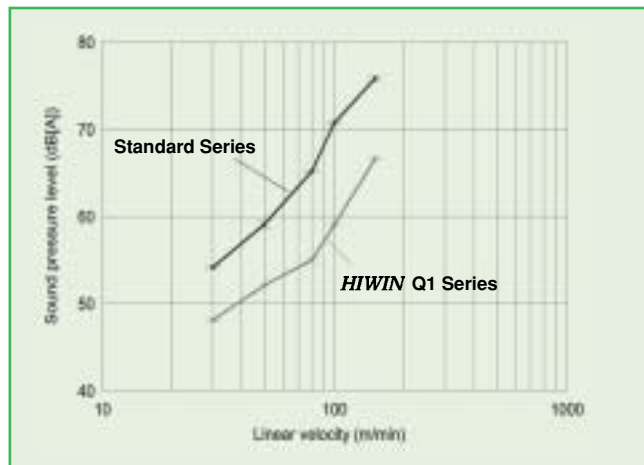

#### (2) Softer Tone

Some noise tone can be eliminated even at a higher velocity. HIWIN Q1 Series is more friendly to the user's ears.

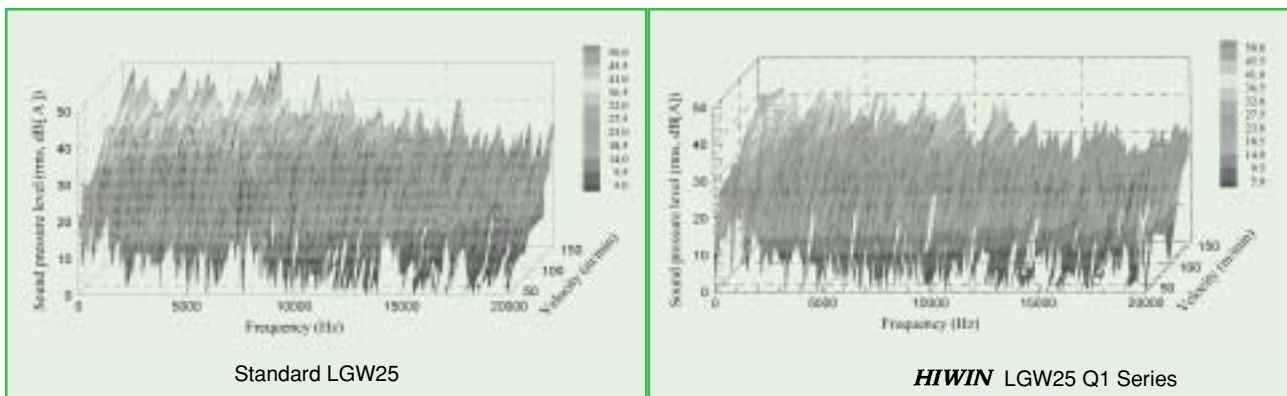

#### (3) Higher reliability

The constant lubricant-releasing mechanism makes it possible to obtain a more reliable working condition and a more economical maintenance.

## 2-7 Option Function


### ◆ Metallic End Cap Type :

Linear Guideway with heat resistance steel end cap and copper bolt cap

#### (1) Feature : Well temperature resistant ability.

Service temperature under 150°C ,  
and instance temperature can up to 200°C

#### (2) Application : Heat treatment equipment, welding machine, glass manufacturing equipment and vacuum using equipment (without vapor dispersion from plastic or rubber at high temperature)

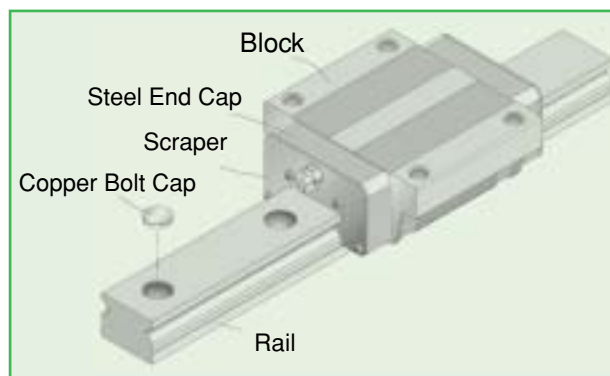

#### (3) Applicable Series :

| Series | Model No.                        |
|--------|----------------------------------|
| LG     | 15 、 20 、 25 、 30 、 35 、 45 、 55 |
| AG     | 15 、 20 、 25 、 30                |
| MGN    | 9 、 12 、 15                      |

#### (4) Specification Number :

Add the mark “/SE” after the specification number for steel end cap and copper bolt cap.

- ➡ Ex : LGW25CA2R1000Z0P11/SE
- ➡ Ex : AGW25CA2R1000Z0P11/SE
- ➡ Ex : MGN15C2R1000Z0P11/SE

#### (5) Copper Bolt Cap Dimension :

| Cap code | Bolt Size | Cap Diameter<br>mm | Cap Thickness<br>mm | Model No. of<br>Linear Guideway |
|----------|-----------|--------------------|---------------------|---------------------------------|
| C3       | M3        | 6.15               | 1.2                 | AGR15R<br>MGN12/15R             |
| C4       | M4        | 7.65               | 1.2                 | LGR15R                          |
| C5       | M5        | 9.65               | 2.8                 | LGR20R<br>AGR20R                |
| C6       | M6        | 11.15              | 2.8                 | LGR25R<br>AGR25/30R             |
| C8       | M8        | 14.15              | 3.5                 | LGR30/35R                       |
| C12      | M12       | 20.15              | 4                   | LGR45R                          |
| C14      | M14       | 23.15              | 4                   | LGR55R                          |

Note: The use of the catalogue should be combined with the Lineat Guideway technical information.

( The specifications in this catalogue are subject to change without notification. )

**M**<sub>EMO</sub>

M<sub>EMO</sub>